




# OIL ANALYSIS REPORT

Sample Rating Trend

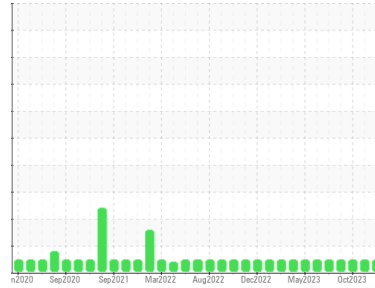

**NORMAL**



Area  
**(C-GDME)**  
 Machine Id  
**[C-GDME] DIAMOND DA20 806487**  
 Component  
**Piston Aircraft Engine**  
 Fluid  
**SHELL AEROSHELL W 80 (6 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0882492</b>	WC0869660	WC0869655
Sample Date	Client Info		<b>01 Dec 2023</b>	13 Nov 2023	19 Oct 2023
TSN	hrs	Client Info	<b>0</b>	0	0
TSO	hrs	Client Info	<b>1944</b>	1900	1862
Oil Age	hrs	Client Info	<b>44</b>	38	60
Oil Changed		Client Info	<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	<b>19</b>	16	19
Chromium	ppm	ASTM D5185(m)	>20	<b>3</b>	3	4
Nickel	ppm	ASTM D5185(m)	>15	<b>1</b>	1	2
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>5</b>	5	6
Lead	ppm	ASTM D5185(m)	>20000	<b>5320</b>	5263	6771
Copper	ppm	ASTM D5185(m)	>25	<b>3</b>	3	3
Tin	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185(m)		<b>2</b>	1	1
Phosphorus	ppm	ASTM D5185(m)		<b>1145</b>	1094	1285
Zinc	ppm	ASTM D5185(m)		<b>6</b>	6	8
Sulfur	ppm	ASTM D5185(m)	3000	<b>2270</b>	2117	2827
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>8</b>	8	9
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	1
Potassium	ppm	ASTM D5185(m)	>20	<b>23</b>	0	0






# OIL ANALYSIS REPORT

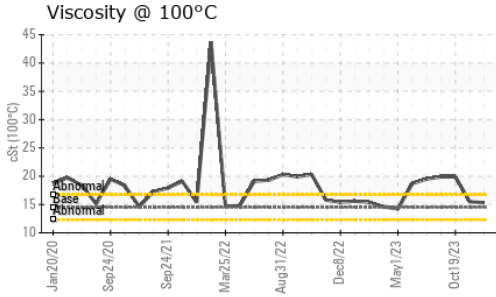

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	.2%
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	<b>15.3</b>	15.5	19.9

## GRAPHS

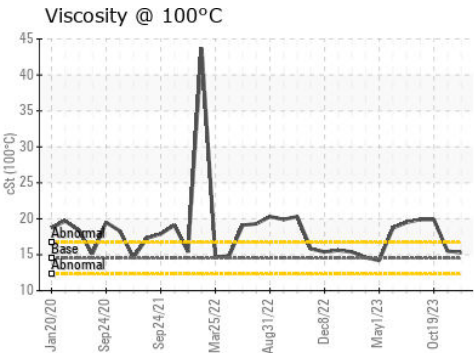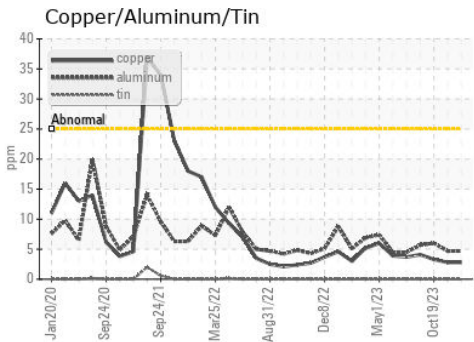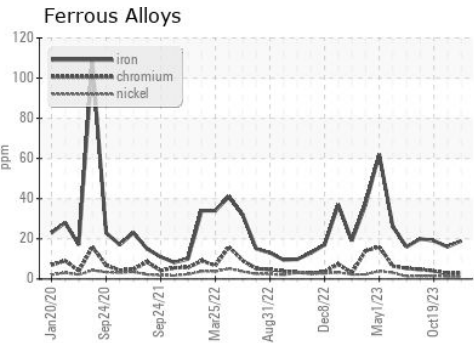

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0882492 **Received** : 02 Jan 2024  
**Lab Number** : **02605876** **Diagnosed** : 03 Jan 2024  
**Unique Number** : 5706962 **Diagnostician** : Kevin Marson  
**Test Package** : AVI 1

**W.C.S. AVIATION LTD.**  
 2600 AIRPORT ROAD UNIT 108  
 WINDSOR, ON  
 CA N8V 1A1  
 Contact: James V  
 james@wcsaviation.com  
 T: (519)972-7271  
 F: (519)972-8355

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.