




# OIL ANALYSIS REPORT

Sample Rating Trend

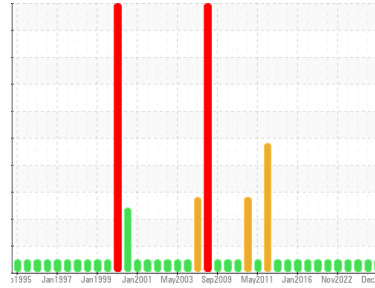

**NORMAL**



Area  
**72 MACHINE ROOM**  
 Machine Id  
**Wire Drive Section (Reducer) (S/N 725103)**  
 Component  
**Gear Reducer**  
 Fluid  
**ESSO SPARTAN EP 220 (20 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC</b>	WC	WC0789978
Sample Date	Client Info	<b>26 Dec 2023</b>	03 Oct 2023	08 May 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>4</b>	38	8
Iron	ppm ASTM D5185(m) >250	<b>108</b>	103	81
Chromium	ppm ASTM D5185(m) >5	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185(m) >5	<b>1</b>	2	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	<1
Silver	ppm ASTM D5185(m)	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185(m) >20	<b>2</b>	2	2
Lead	ppm ASTM D5185(m) >50	<b>17</b>	17	17
Copper	ppm ASTM D5185(m) >50	<b>&lt;1</b>	1	<1
Tin	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) .5	<b>15</b>	15	13
Barium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	0
Molybdenum	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	0	<1
Calcium	ppm ASTM D5185(m) 1.7	<b>3</b>	4	3
Phosphorus	ppm ASTM D5185(m) 250	<b>329</b>	329	363
Zinc	ppm ASTM D5185(m) .3	<b>8</b>	8	6
Sulfur	ppm ASTM D5185(m)	<b>7548</b>	7436	7363
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >60	<b>7</b>	7	7
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	<1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.75	<b>0.74</b>	0.72	0.74




# OIL ANALYSIS REPORT

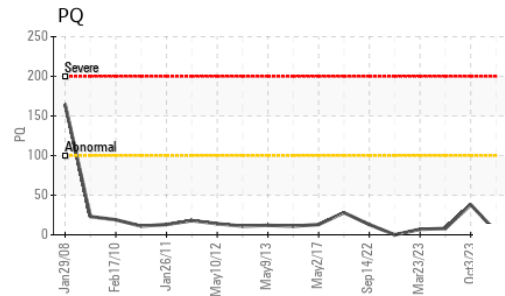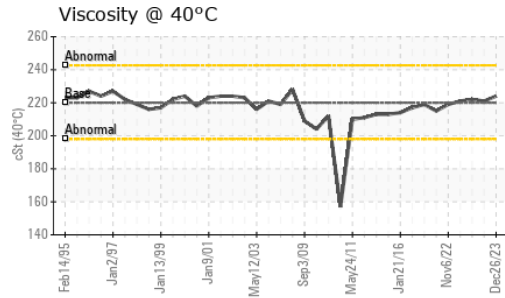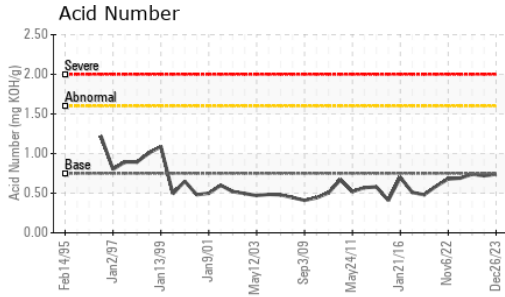






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	LIGHT	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	<b>224</b>	221

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

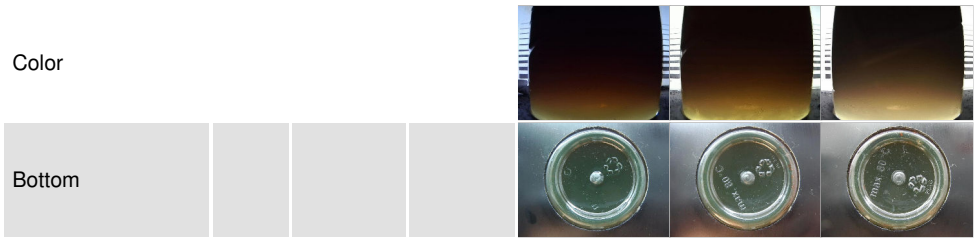

## GRAPHS

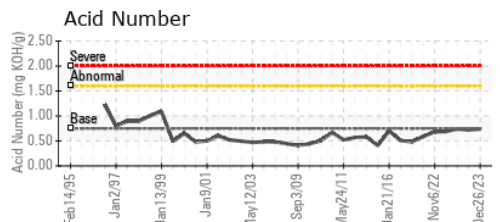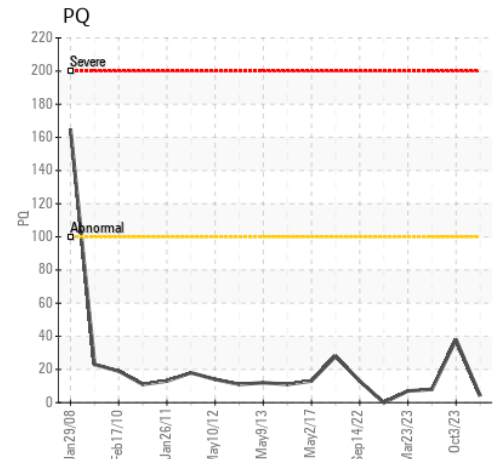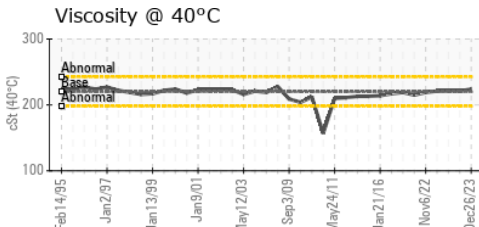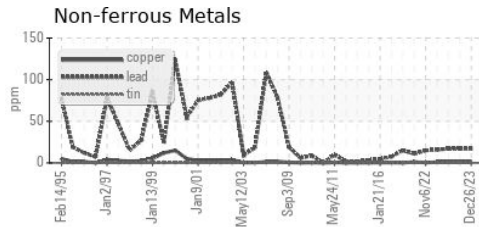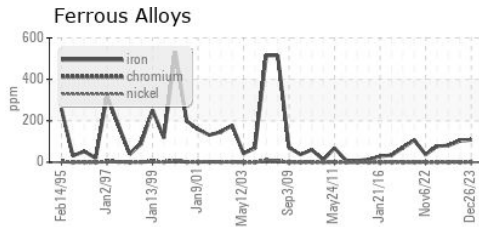

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC **Received** : 03 Jan 2024  
**Lab Number** : 02606283 **Diagnosed** : 03 Jan 2024  
**Unique Number** : 5707369 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**AV GROUP NB INC.**  
 103 PINDER ROAD,, NACKAWIC MILL  
 NACKAWIC, NB  
 CA E6G 1W4  
 Contact: Basil Fadulalla  
 basil.fadulalla@adityabirla.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.