



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
JOHN DEERE 160GLC HOPKINS160G
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- LTR)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0818952	---	---
Sample Date	Client Info		05 Jan 2024	---	---
Machine Age	hrs	Client Info	7199	---	---
Oil Age	hrs	Client Info	150	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	---	---
Water	WC Method	>0.21	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	13	---
Chromium	ppm	ASTM D5185(m)	>11	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---
Titanium	ppm	ASTM D5185(m)		0	---
Silver	ppm	ASTM D5185(m)	>3	0	---
Aluminum	ppm	ASTM D5185(m)	>31	2	---
Lead	ppm	ASTM D5185(m)	>26	<1	---
Copper	ppm	ASTM D5185(m)	>26	<1	---
Tin	ppm	ASTM D5185(m)	>4	0	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	8	---
Barium	ppm	ASTM D5185(m)	10	0	---
Molybdenum	ppm	ASTM D5185(m)	100	1	---
Manganese	ppm	ASTM D5185(m)		0	---
Magnesium	ppm	ASTM D5185(m)	450	21	---
Calcium	ppm	ASTM D5185(m)	3000	2251	---
Phosphorus	ppm	ASTM D5185(m)	1150	842	---
Zinc	ppm	ASTM D5185(m)	1350	972	---
Sulfur	ppm	ASTM D5185(m)	4250	2996	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	3	---
Sodium	ppm	ASTM D5185(m)	>158	2	---
Potassium	ppm	ASTM D5185(m)	>20	2	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.4	---
Nitration	Abs/cm	ASTM D7624*	>20	6.3	---
Sulfation	Abs./1mm	ASTM D7415*	>30	17.3	---



OIL ANALYSIS REPORT

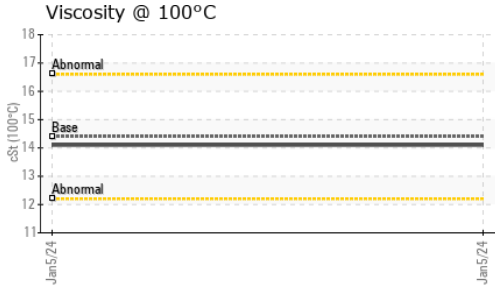

FLUID DEGRADATION		method	limit/base	current	history1	history2
-------------------	--	--------	------------	---------	----------	----------

Oxidation	Abs./1mm	ASTM D7414*	>25	9.8	---	---
-----------	----------	-------------	-----	------------	-----	-----

VISUAL		method	limit/base	current	history1	history2
--------	--	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.21	NEG	---	---
------------------	--------	---------	-------	------------	-----	-----

Free Water	scalar	Visual*		NEG	---	---
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES		method	limit/base	current	history1	history2
------------------	--	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.1	---	---
--------------	-----	---------------	------	-------------	-----	-----

GRAPHS						
--------	--	--	--	--	--	--

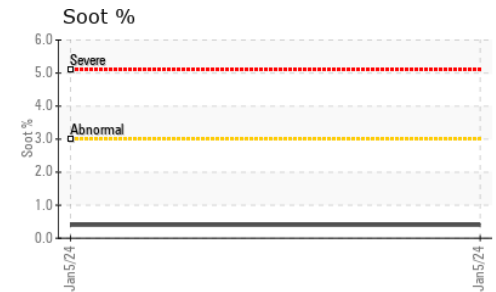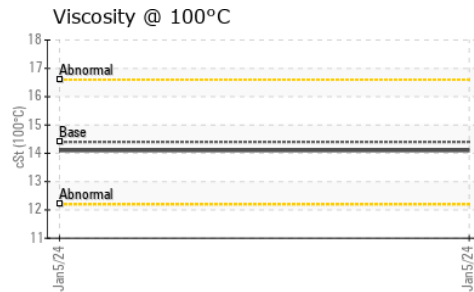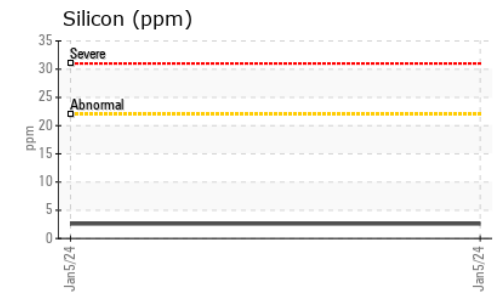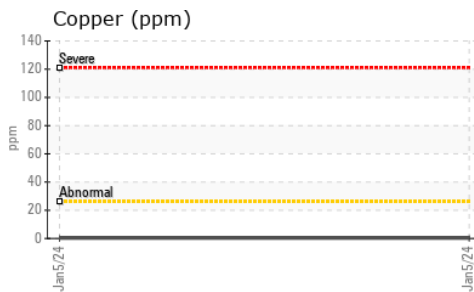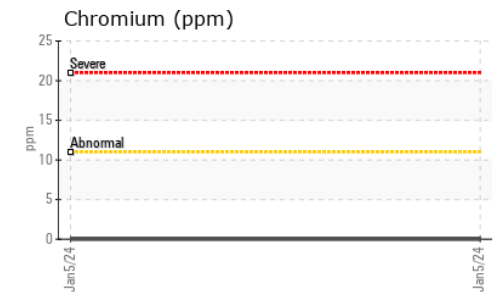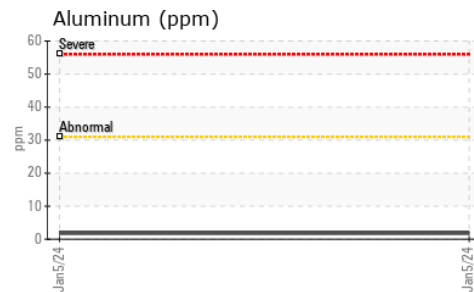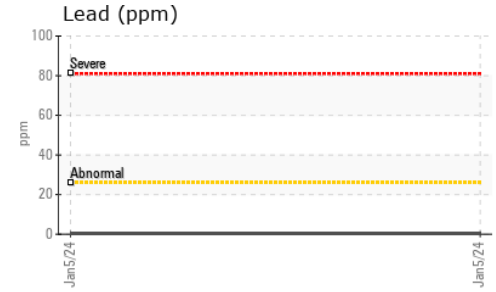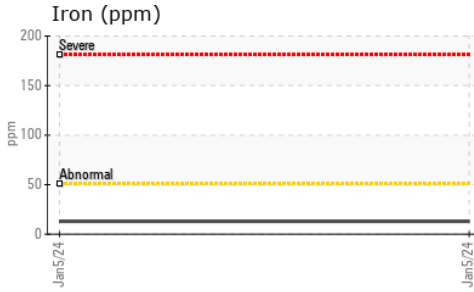

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0818952 **Received** : 10 Jan 2024
Lab Number : **02607755** **Diagnosed** : 10 Jan 2024
Unique Number : 5708841 **Diagnostician** : Wes Davis
Test Package : MOB 1

JD MOBILE REPAIR SERVICE
 183841 GREY ROAD #9
 HOLSTEIN, ON
 CA N0G 2A0
 Contact: John Dowling
 dozerdoctor@hotmail.com
 T: (519)604-8247
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.