




OIL ANALYSIS REPORT

Sample Rating Trend

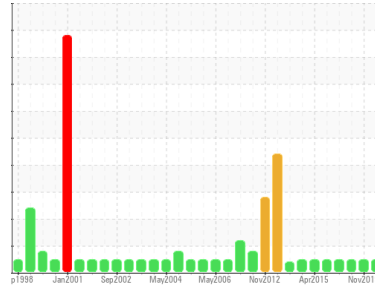

NORMAL



Area
BOF/ALLOY SYSTEM
 Machine Id
A - L1 Conveyor Drive Gear Box
 Component
Gearbox
 Fluid
SHELL OMALA 220 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0898704	WC0413611	WC0372653
Sample Date	Client Info		10 Jan 2024	25 Nov 2019	18 Jul 2019
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>5	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>DFLT	51	59	49
Iron	ppm	ASTM D5185(m) >200	59	65	60
Chromium	ppm	ASTM D5185(m) >15	2	2	2
Nickel	ppm	ASTM D5185(m) >15	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	<1	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	1	<1	<1
Lead	ppm	ASTM D5185(m) >100	4	2	2
Copper	ppm	ASTM D5185(m) >200	<1	<1	<1
Tin	ppm	ASTM D5185(m) >25	0	0	0
Antimony	ppm	ASTM D5185(m) >5	0	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES






	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 4.4	<1	<1	<1
Barium	ppm	ASTM D5185(m) 0.0	0	<1	<1
Molybdenum	ppm	ASTM D5185(m) 0	0	0	<1
Manganese	ppm	ASTM D5185(m)	4	4	4
Magnesium	ppm	ASTM D5185(m) 0	4	4	4
Calcium	ppm	ASTM D5185(m) 0	10	7	7
Phosphorus	ppm	ASTM D5185(m) 215	269	283	277
Zinc	ppm	ASTM D5185(m) 0	6	4	5
Sulfur	ppm	ASTM D5185(m) 7039	9553	10025	10296
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	3	3	3
Sodium	ppm	ASTM D5185(m)	1	0	1
Potassium	ppm	ASTM D5185(m) >20	1	<1	<1



OIL ANALYSIS REPORT

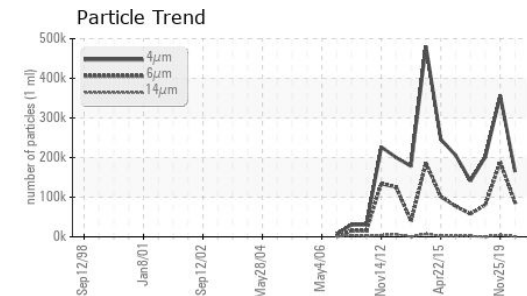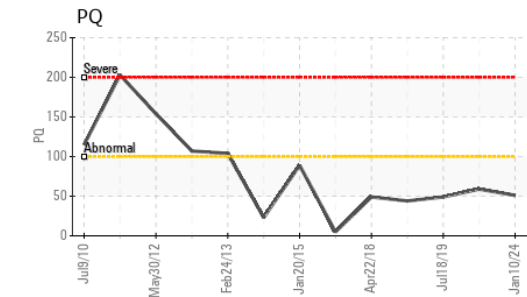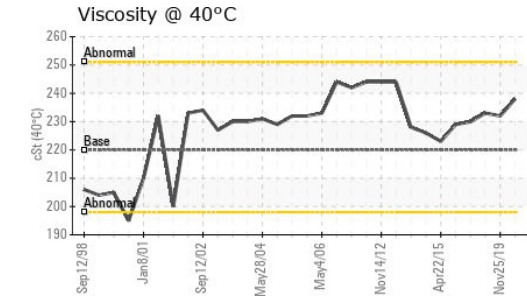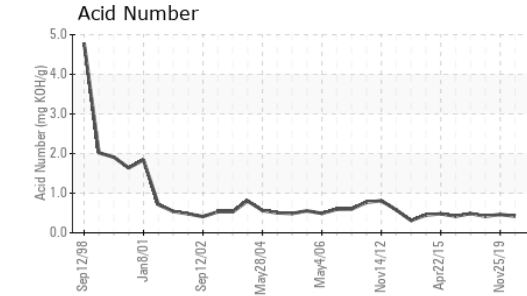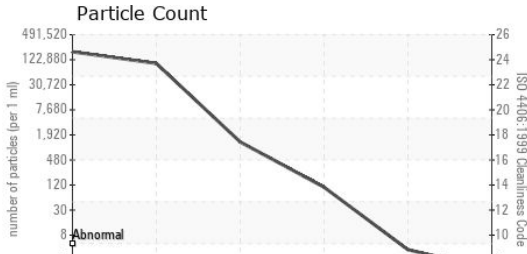

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		164350	356515	201332
Particles >6µm	ASTM D7647	>10240000	86663	189025	80771
Particles >14µm	ASTM D7647	>10240000	1140	4495	335
Particles >21µm	ASTM D7647	>2560000	94	367	27
Particles >38µm	ASTM D7647	>640000	3	0	0
Particles >71µm	ASTM D7647	>160000	1	0	0
Oil Cleanliness	ISO 4406 (c)	>--/30/30	25/24/17	26/25/19	25/24/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*		0.42	0.463	0.417

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE	NONE
Debris	scalar Visual*	NONE	NONE	VLITE	VLITE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>5	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	220	238	232	233

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color



Bottom



Laboratory Sample No. : WC0898704
Lab Number : 02608043
Unique Number : 5709129
Test Package : IND 2 (Additional Tests: PQ, PrtCount)

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **STELCO - BOSC - Basic Oxygen Slab Caster**
 2330 Regional Road #3, Door: BOSC8
 NANTICOKE, ON
 CA N0A 1L0
 Contact: Tom Walden
 Thomas.Walden@stelco.com
 T: (519)587-4541
 F: (519)587-7702

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.