




OIL ANALYSIS REPORT

Sample Rating Trend

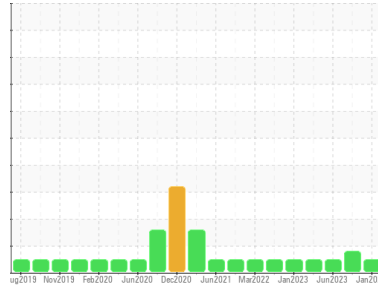

NORMAL



Area
[1496960]
 Machine Id
NOVA 1716
 Component
Natural Gas Engine
 Fluid
VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0891141	WC0849963	WC0811611
Sample Date	Client Info			10 Jan 2024	30 Sep 2023	30 Jun 2023
Machine Age	kms	Client Info		360042	0	0
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.1		NEG	NEG	NEG
Glycol	WC Method			---	---	0.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>50	10	11	12
Chromium	ppm	ASTM D5185(m)	>4	2	1	2
Nickel	ppm	ASTM D5185(m)	>2	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>9	2	2	2
Lead	ppm	ASTM D5185(m)	>30	<1	3	5
Copper	ppm	ASTM D5185(m)	>35	18	▲ 67	32
Tin	ppm	ASTM D5185(m)	>4	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		7	6	6
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		52	54	53
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		814	841	846
Calcium	ppm	ASTM D5185(m)		1250	1260	1287
Phosphorus	ppm	ASTM D5185(m)		730	679	733
Zinc	ppm	ASTM D5185(m)		876	889	873
Sulfur	ppm	ASTM D5185(m)		1950	1790	1804
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>+100	17	6	6
Sodium	ppm	ASTM D5185(m)		4	3	9
Potassium	ppm	ASTM D5185(m)	>20	4	<1	12

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	13.8	12.6	13.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.9	23.0	24.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.1	21.5	23.3











OIL ANALYSIS REPORT

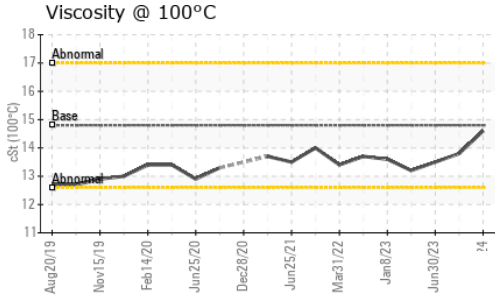

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.6	13.8	13.5

GRAPHS

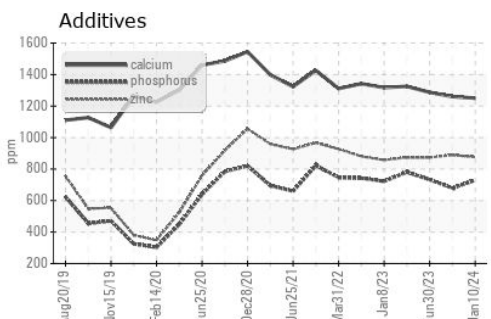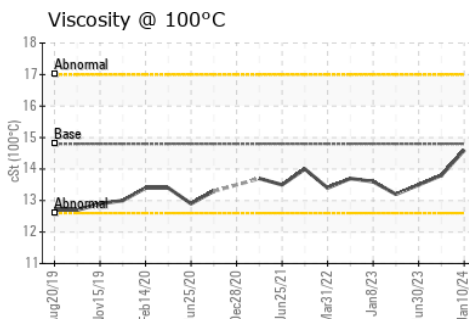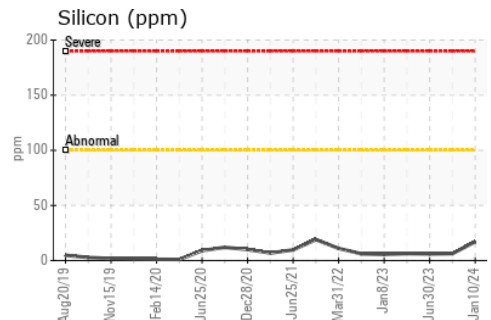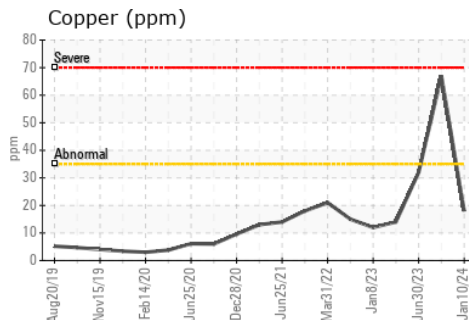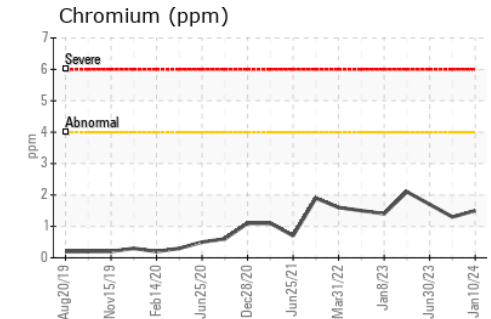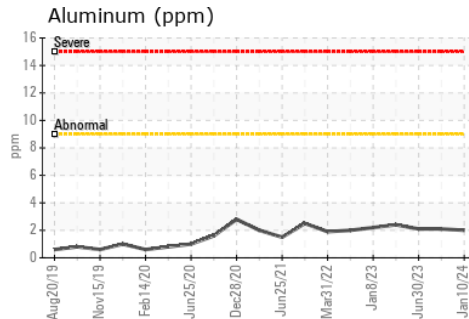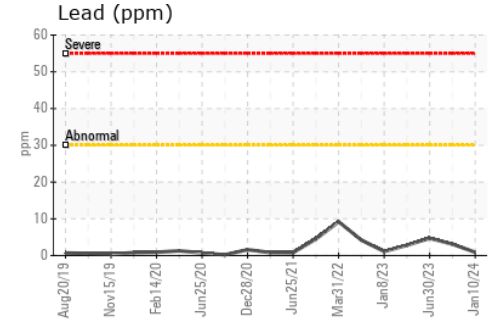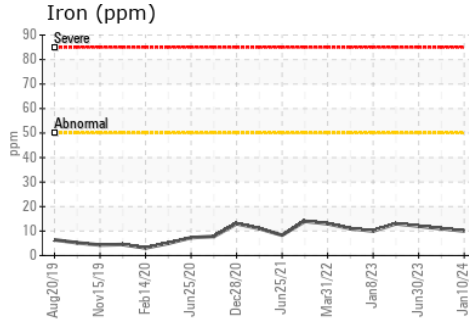

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0891141 **Received** : 11 Jan 2024
Lab Number : **02608125** **Diagnosed** : 11 Jan 2024
Unique Number : 5709211 **Diagnostician** : Wes Davis
Test Package : MOB 1

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.