



FUEL REPORT

Sample Rating Trend

NORMAL



Machine Id


FLD

Component

Diesel Fuel

Fluid

ANDEROL Royco 950 MIL-PRF-7024 Type II (--- GAL)

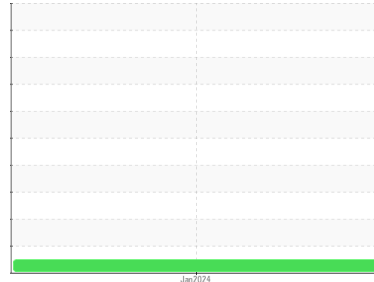

DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

Corrosion

{not applicable}

Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. There is no indication of any contamination in the diesel fuel.

Fuel Condition

The condition of the fuel is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0887304	---	---
Sample Date	Client Info		15 Jan 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Sample Status			NORMAL	---	---

PHYSICAL PROPERTIES

	method	limit/base	current	history1	history2
Specific Gravity	ASTM D1298*		0.764	---	---
Fuel Color	text	Visual Screen*	Yellow	---	---
Visc @ 40°C	cSt	ASTM D7279(m) 1.5	1	---	---
Pensky-Martens Flash Point	°C	ASTM D7215*	45	---	---

SULFUR CONTENT

	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	12	---	---

DISTILLATION

	method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887* 158	163	---	---
5% Distillation Point	°C	ASTM D2887*	169	---	---
10% Distill Point	°C	ASTM D2887*	168	---	---
15% Distillation Point	°C	ASTM D2887*	170	---	---
20% Distill Point	°C	ASTM D2887*	171	---	---
30% Distill Point	°C	ASTM D2887*	171	---	---
40% Distill Point	°C	ASTM D2887*	173	---	---
50% Distill Point	°C	ASTM D2887*	175	---	---
60% Distill Point	°C	ASTM D2887*	176	---	---
70% Distill Point	°C	ASTM D2887*	178	---	---
80% Distill Point	°C	ASTM D2887*	183	---	---
85% Distillation Point	°C	ASTM D2887*	188	---	---
90% Distill Point	°C	ASTM D2887*	193	---	---
95% Distillation Point	°C	ASTM D2887*	202	---	---
Final Boiling Point	°C	ASTM D2887* 200	243	---	---

IGNITION QUALITY

	method	limit/base	current	history1	history2
API Gravity	ASTM D1298*		53	---	---
Cetane Index	ASTM D4737*	<40.0	53	---	---

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) <1.0	<1	---	---
Sodium	ppm	ASTM D5185(m) <0.1	<1	---	---
Potassium	ppm	ASTM D5185(m) <0.1	0	---	---
Water	%	ASTM D6304* <0.05	0.002	---	---
ppm Water	ppm	ASTM D6304* <500	16	---	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	239	---	---
Particles >6µm	ASTM D7647	>640	88	---	---
Particles >14µm	ASTM D7647	>80	8	---	---
Particles >21µm	ASTM D7647	>20	2	---	---
Particles >38µm	ASTM D7647	>4	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	15/14/10	---	---






FUEL REPORT

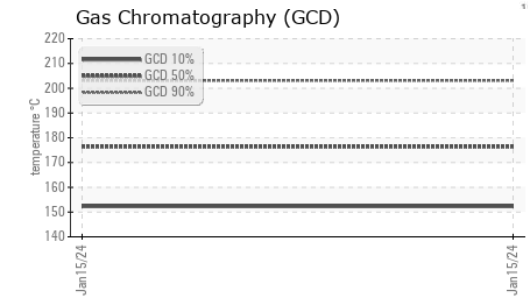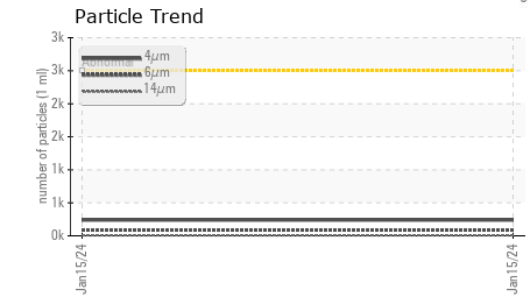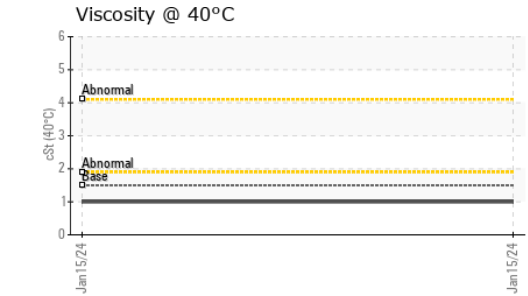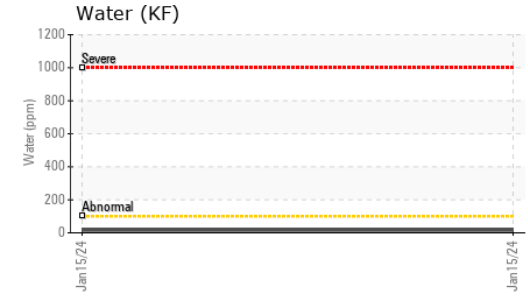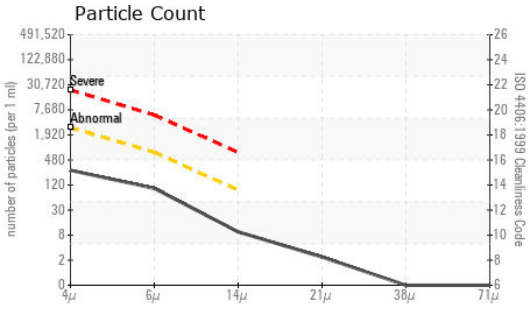

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---
Iron	ppm	ASTM D5185(m)	<0.1	0	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	<1	---
Zinc	ppm	ASTM D5185(m)	<0.1	0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

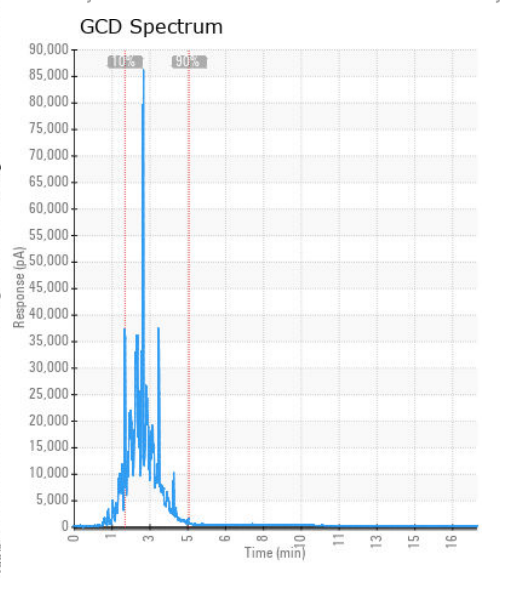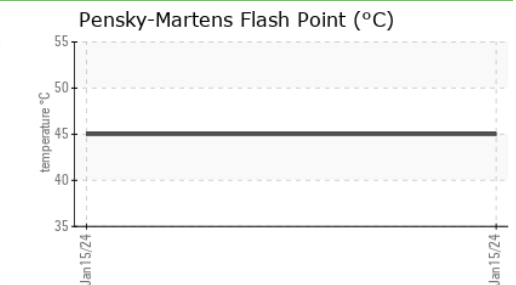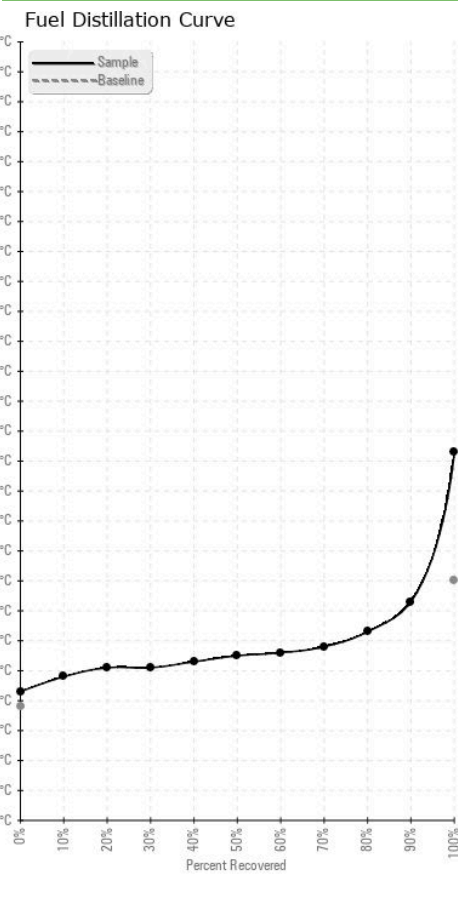

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0887304 **Recieved** : 17 Jan 2024
Lab Number : 02609556 **Diagnosed** : 23 Jan 2024
Unique Number : 5710642 **Diagnostician** : Kevin Marson
Test Package : FUEL (Additional Tests: CC Flash, GC-PercFuel, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Action Aero
 91 Watts Avenue
 Charlottetown, PE
 CA C1E 2B7
 Contact: Chris Newson
 cnewson@actionaero.com
 T: (902)370-3311
 F: