




OIL ANALYSIS REPORT

Sample Rating Trend

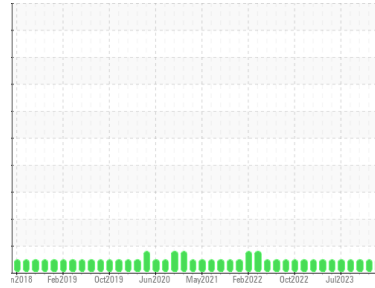

NORMAL



Machine Id
CUMMINS 229

Component
Rear Diesel Engine

Fluid
ESSO XD-3 EXTRA 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0889098	WC0866504	WC0866562
Sample Date	Client Info			16 Jan 2024	04 Dec 2023	23 Oct 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		9186	9075	10970
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	5	6	13
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	3
Lead	ppm	ASTM D5185(m)	>40	<1	0	<1
Copper	ppm	ASTM D5185(m)	>330	4	3	6
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		126	120	77
Barium	ppm	ASTM D5185(m)		0	<1	<1
Molybdenum	ppm	ASTM D5185(m)		1	<1	<1
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		21	13	16
Calcium	ppm	ASTM D5185(m)	3780	2154	2184	2150
Phosphorus	ppm	ASTM D5185(m)	1370	951	946	875
Zinc	ppm	ASTM D5185(m)	1500	1121	1156	1049
Sulfur	ppm	ASTM D5185(m)	3800	3004	2865	2758
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	3	3	6
Sodium	ppm	ASTM D5185(m)	>192	5	7	18
Potassium	ppm	ASTM D5185(m)	>20	6	6	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.1	0.2	0.4
Nitration	Abs/cm	ASTM D7624*	>20	8.5	8.6	9.8
Sulfation	Abs./1mm	ASTM D7415*	>30	22.0	22.4	25.7



OIL ANALYSIS REPORT








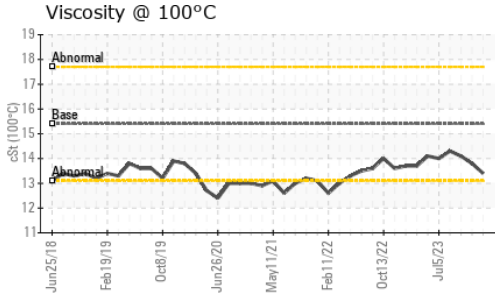


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.9	19.0	24.9

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.4	13.8	14.1

GRAPHS

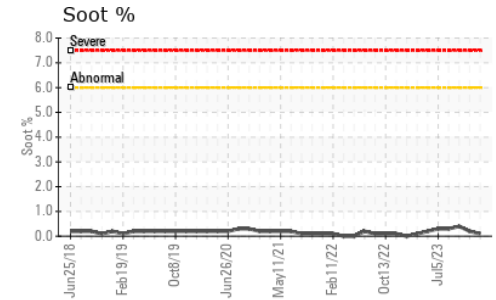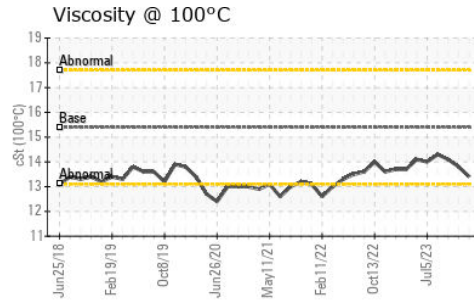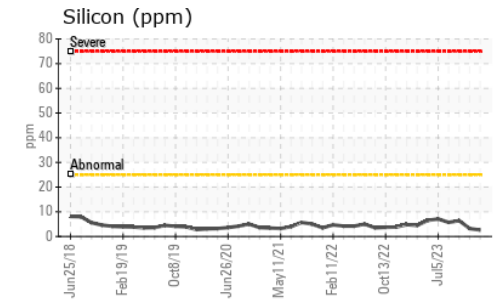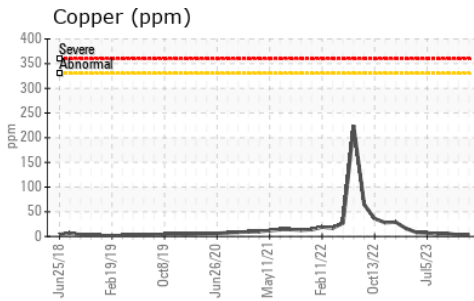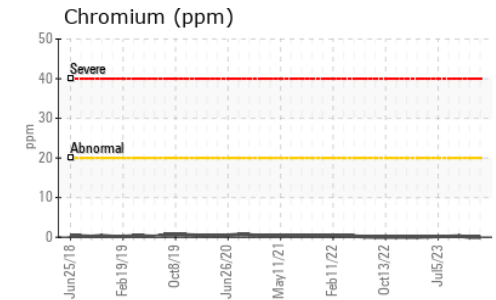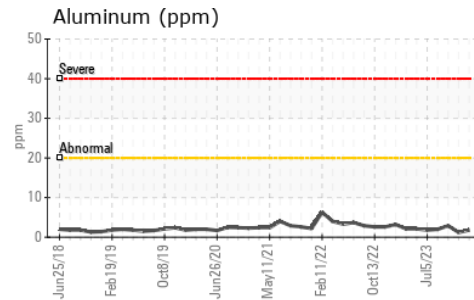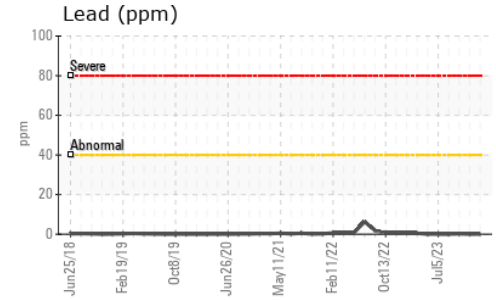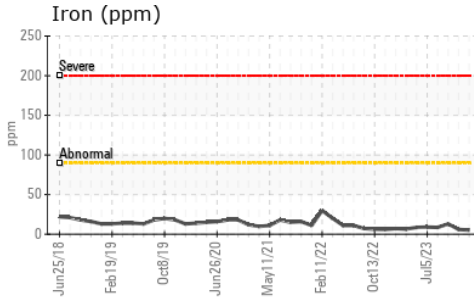

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889098 **Received** : 19 Jan 2024
Lab Number : **02609876** **Diagnosed** : 19 Jan 2024
Unique Number : 5710962 **Diagnostician** : Wes Davis
Test Package : MOB 1

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.