




# OIL ANALYSIS REPORT

Sample Rating Trend

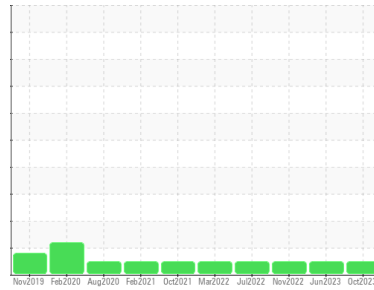

**NORMAL**



Machine Id

**7310**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0853437</b>	WC0796544	WC0737526
Sample Date	Client Info		<b>26 Oct 2023</b>	12 Jun 2023	06 Nov 2022
Machine Age	kms	Client Info	<b>295963</b>	275555	248664
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	<b>63</b>	65	30
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>11</b>	10	4
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>5</b>	5	3
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	<b>24</b>	32	29
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>2</b>	5	13
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>715</b>	727	705
Calcium	ppm	ASTM D5185(m)	3000	<b>1315</b>	1406	1314
Phosphorus	ppm	ASTM D5185(m)	1150	<b>672</b>	743	720
Zinc	ppm	ASTM D5185(m)	1350	<b>751</b>	787	754
Sulfur	ppm	ASTM D5185(m)	4250	<b>2507</b>	2483	2432
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>12</b>	14	8
Sodium	ppm	ASTM D5185(m)		<b>4</b>	5	4
Potassium	ppm	ASTM D5185(m)	>20	<b>15</b>	14	5

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.7</b>	0.7	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>15.4</b>	16.1	13.0
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>29.4</b>	30.8	26.8



# OIL ANALYSIS REPORT

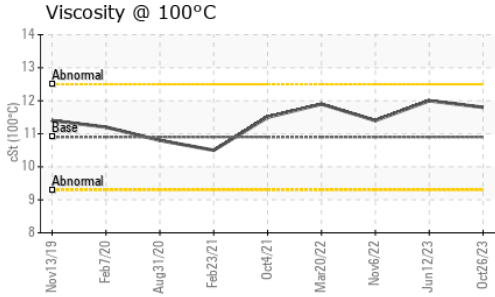

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>32.3</b>	33.5	26.0









### VISUAL

	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES

	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>11.8</b>	12.0	11.4

### GRAPHS

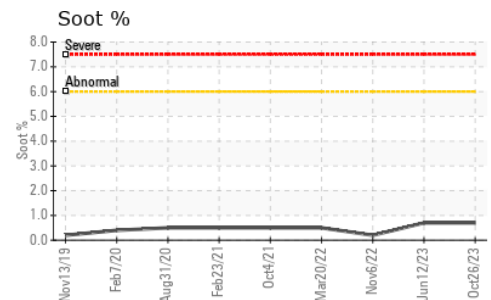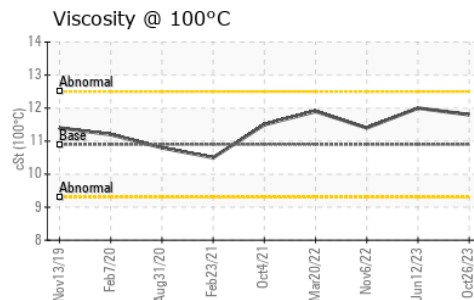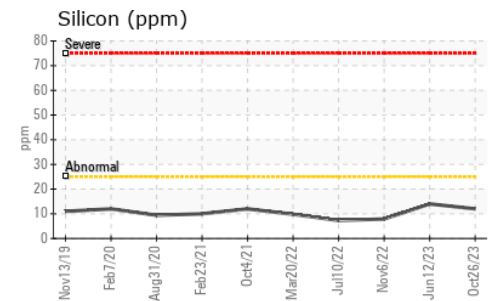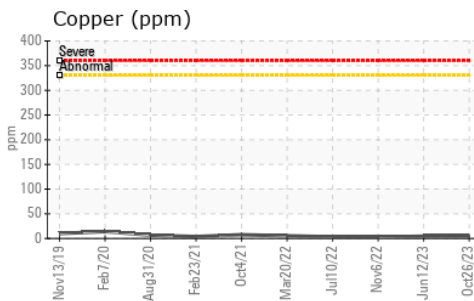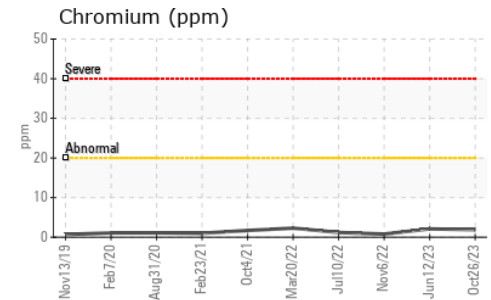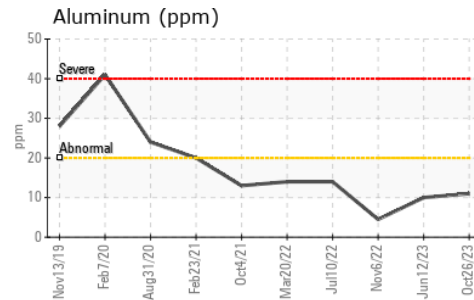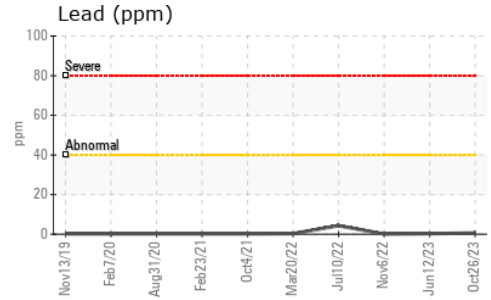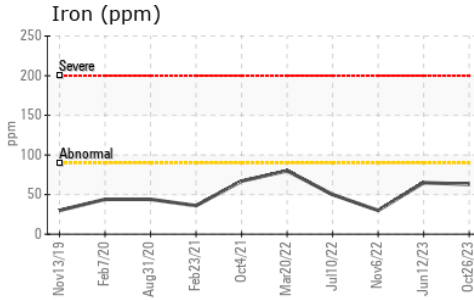

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0853437  
**Lab Number** : 02609917  
**Unique Number** : 5711003  
**Test Package** : MOB 1  
**Received** : 19 Jan 2024  
**Diagnosed** : 19 Jan 2024  
**Diagnostician** : Kevin Marson

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.