




# OIL ANALYSIS REPORT

Sample Rating Trend

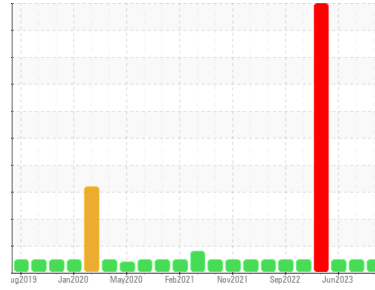

**NORMAL**



Machine Id  
**NOVA 1805**

Component  
**Natural Gas Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0878025</b>	WC0849792	WC0791324
Sample Date	Client Info		<b>07 Mar 2024</b>	31 Aug 2023	01 Jun 2023
Machine Age	kms	Client Info	<b>373898</b>	352217	333113
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>---</b>	---	0.0

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>24</b>	9	8
Chromium	ppm	ASTM D5185(m)	>4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>3</b>	<1	1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>2</b>	3	2
Copper	ppm	ASTM D5185(m)	>35	<b>4</b>	2	2
Tin	ppm	ASTM D5185(m)	>4	<b>1</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>23</b>	8	12
Barium	ppm	ASTM D5185(m)		<b>9</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>52</b>	54	52
Manganese	ppm	ASTM D5185(m)		<b>8</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>786</b>	879	824
Calcium	ppm	ASTM D5185(m)		<b>1165</b>	1282	1298
Phosphorus	ppm	ASTM D5185(m)		<b>719</b>	756	735
Zinc	ppm	ASTM D5185(m)		<b>820</b>	914	858
Sulfur	ppm	ASTM D5185(m)		<b>2076</b>	1986	1935
Lithium	ppm	ASTM D5185(m)		<b>3</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>35</b>	6	5
Sodium	ppm	ASTM D5185(m)		<b>37</b>	4	3
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	<1	<1

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.2</b>	12.8	11.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.0</b>	24.1	23.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.9</b>	22.4	21.3











# OIL ANALYSIS REPORT

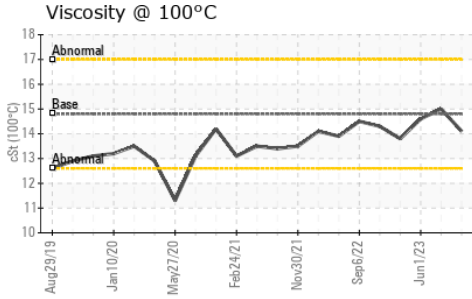

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>14.1</b>	15.0	14.6

## GRAPHS

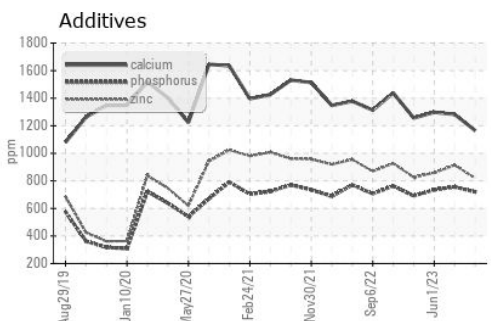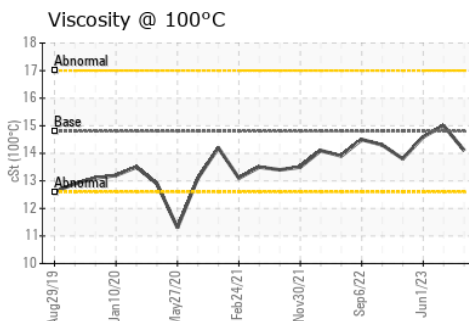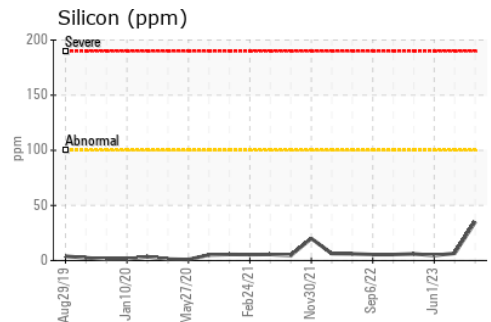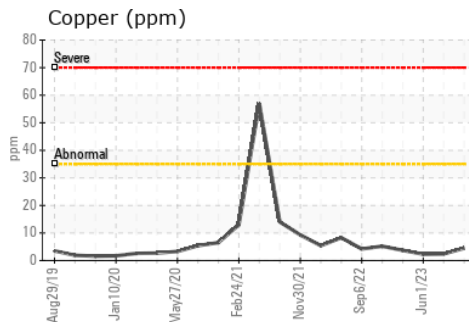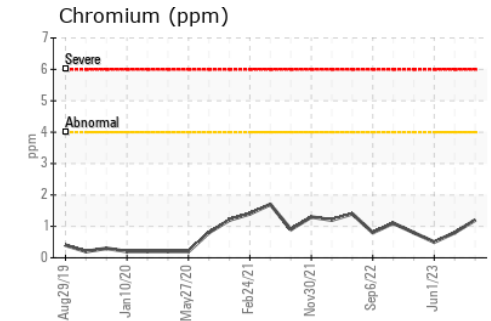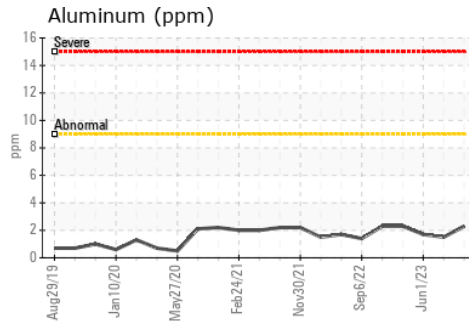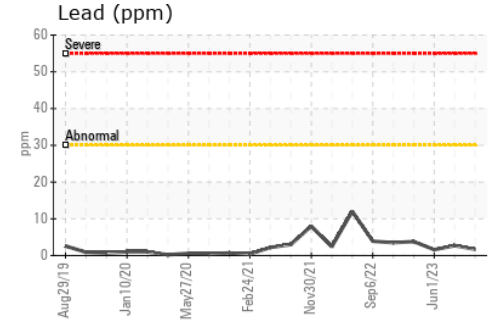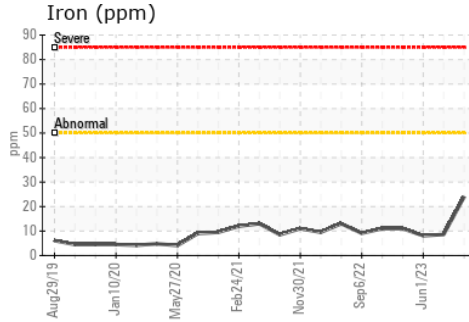

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0878025  
**Lab Number** : **02621748**  
**Unique Number** : 5746867  
**Test Package** : MOB 1  
**Received** : 13 Mar 2024  
**Tested** : 13 Mar 2024  
**Diagnosed** : 13 Mar 2024 - Wes Davis

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.