








# PROBLEM SUMMARY

Sample Rating Trend

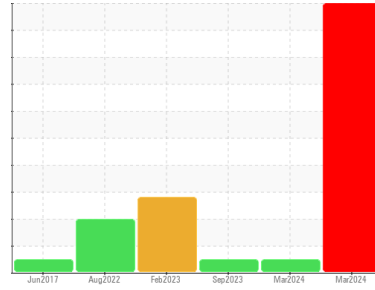

Area  
**62 BOILER FEEDWATER**  
 Machine Id  
**#5 Feedwater Pump NDE (S/N 622124)**  
 Component  
**Non-Drive End Pump Motor**  
 Fluid  
**ESSO NUTO H ISO32 (4 LTR)**

## COMPONENT CONDITION SUMMARY

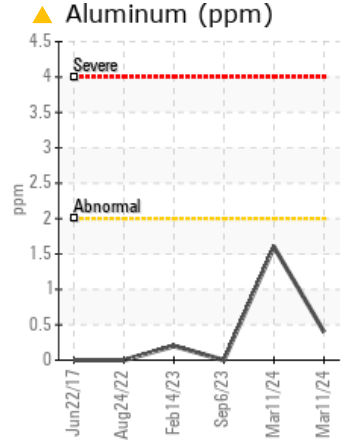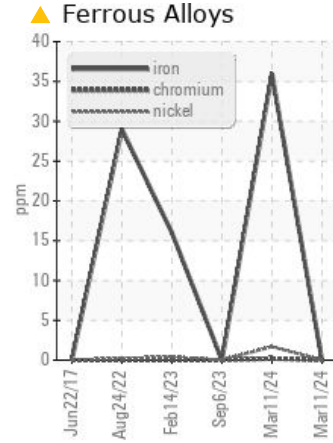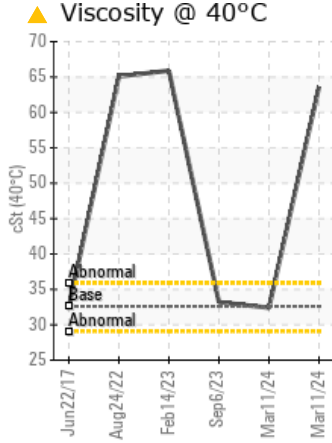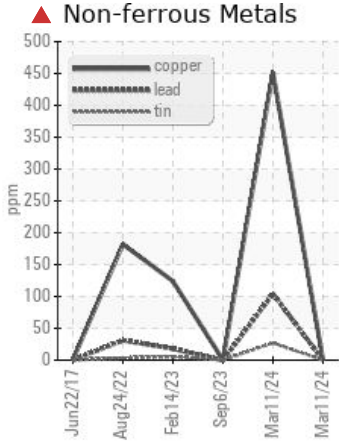

## RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	NORMAL
Nickel	ppm	ASTM D5185(m) >2	▲ 2	0	0
Aluminum	ppm	ASTM D5185(m) >2	▲ 2	<1	0
Lead	ppm	ASTM D5185(m) >25	▲ 104	0	0
Copper	ppm	ASTM D5185(m) >7	▲ 452	<1	<1
Tin	ppm	ASTM D5185(m) >10	▲ 27	0	0
Visc @ 40°C	cSt	ASTM D7279(m) 32.6	▲ 63.6	32.4	33.2

Customer Id: STANAC  
 Sample No.: WC  
 Lab Number: 02622461  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

11 Mar 2024 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Sep 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



14 Feb 2023 Diag: Kevin Marson

WATER



We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Copper ppm levels are abnormal. Bearing wear is indicated. There is a moderate concentration of water present in the oil. Free water present. Viscosity of sample indicates oil is within ISO 68 range, advise investigate. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

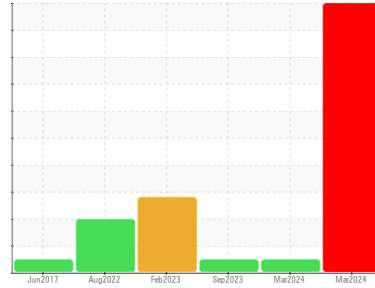

Area  
**62 BOILER FEEDWATER**  
 Machine Id  
**#5 Feedwater Pump NDE (S/N 622124)**  
 Component  
**Non-Drive End Pump Motor**  
 Fluid  
**ESSO NUTO H ISO32 (4 LTR)**

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

Copper, lead and tin ppm levels are severe. Aluminum and nickel ppm levels are abnormal. Bearing wear is indicated.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within ISO 68 range, advise investigate. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC</b>	WC	WC
Sample Date	Client Info	<b>11 Mar 2024</b>	11 Mar 2024	06 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>SEVERE</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	0
Iron	ppm	ASTM D5185(m) >100	<b>36</b>	0
Chromium	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0
Nickel	ppm	ASTM D5185(m) >2	<b>2</b>	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	0
Aluminum	ppm	ASTM D5185(m) >2	<b>2</b>	<1
Lead	ppm	ASTM D5185(m) >25	<b>104</b>	0
Copper	ppm	ASTM D5185(m) >7	<b>452</b>	<1
Tin	ppm	ASTM D5185(m) >10	<b>27</b>	0
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	0
Barium	ppm	ASTM D5185(m)	<b>0</b>	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0
Calcium	ppm	ASTM D5185(m)	<b>54</b>	54
Phosphorus	ppm	ASTM D5185(m)	<b>341</b>	349
Zinc	ppm	ASTM D5185(m)	<b>397</b>	431
Sulfur	ppm	ASTM D5185(m)	<b>7243</b>	4839
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1






## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>13</b>	0
Sodium	ppm	ASTM D5185(m)	<b>2</b>	<1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	2
Water	%	ASTM D6304* >0.1	<b>0.001</b>	---
ppm Water	ppm	ASTM D6304* >1000	<b>7</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* .40	<b>0.42</b>	0.43


# OIL ANALYSIS REPORT

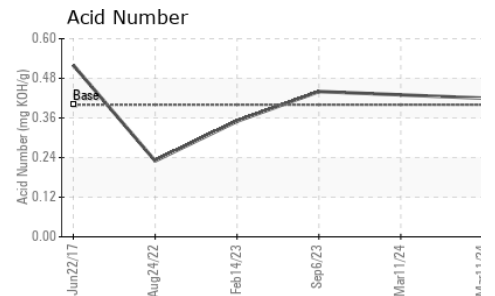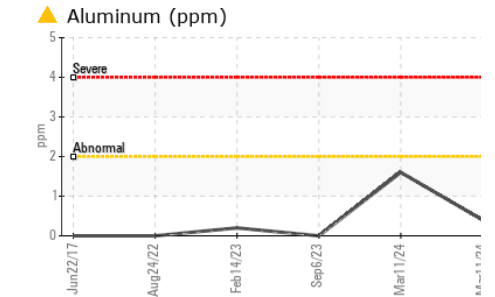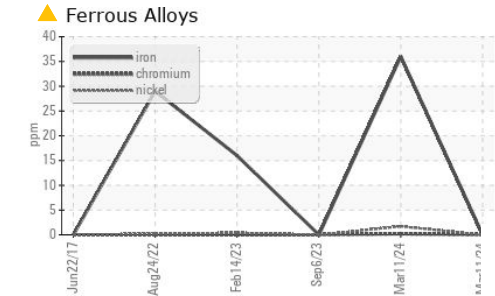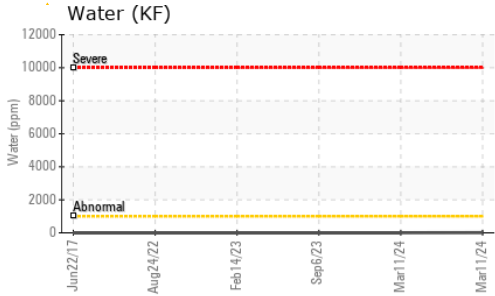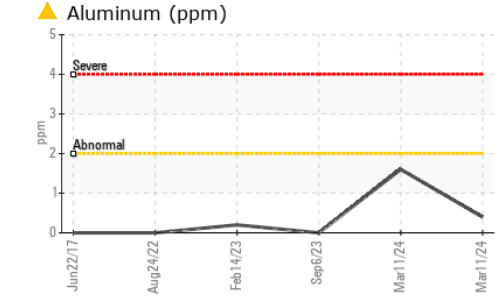






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32.6 ▲ 63.6	32.4	33.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

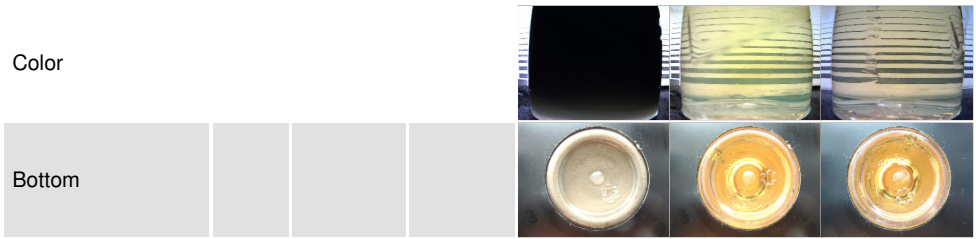

## GRAPHS

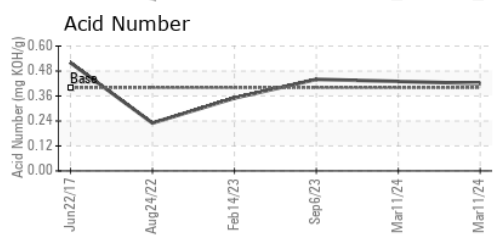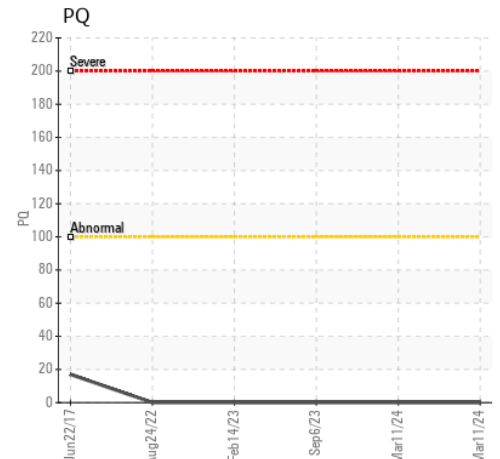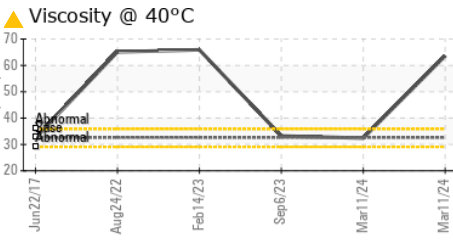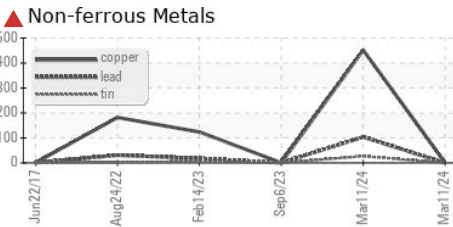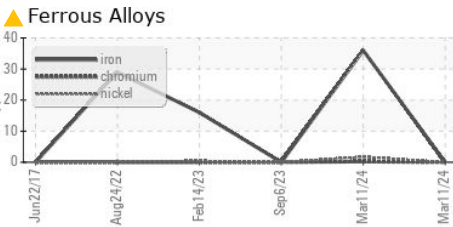

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02622461  
**Unique Number** : 5747580  
**Test Package** : IND 2 ( Additional Tests: KF, TAN Man )  
**Received** : 15 Mar 2024  
**Tested** : 19 Mar 2024  
**Diagnosed** : 19 Mar 2024 - Kevin Marson

**AV GROUP NB INC.**  
 103 PINDER ROAD,, NACKAWIC MILL  
 NACKAWIC, NB  
 CA E6G 1W4  
 Contact: Basil Fadulalla  
 basil.fadulalla@adityabirla.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.