




# OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Area  
**RHOB/HYDRAULICS**  
 Machine Id  
**E - Ladle Lift Hydraulics**  
 Component  
**Tank Hydraulic System**  
 Fluid  
**FORSYTHE NO FIRE WG 200R (1320 GAL)**

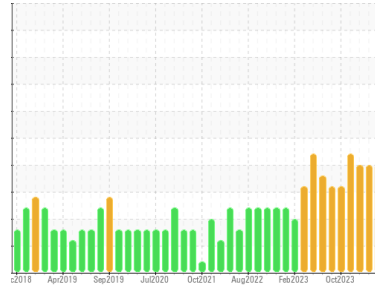

## DIAGNOSIS

### Recommendation

Due to the low reserve alkalinity it is advised that you contact FORSYTHE to assist in restoring the proper amine concentration. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

### Wear

Copper ppm levels are abnormal. Oil cooler core leaching or motor piston wear is indicated.

### Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

### Fluid Condition

The reserve alkalinity of this fluid is lower than acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The water concentration level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0926482</b>	WC0910448	WC0901984
Sample Date	Client Info		<b>22 Mar 2024</b>	16 Feb 2024	22 Jan 2024
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>99999	<b>4</b>	0	0
Iron	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Copper	ppm	ASTM D5185(m)	>20	<b>▲ 26</b>	▲ 33
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Antimony	ppm	ASTM D5185(m)		<b>&lt;1</b>	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>0</b>	1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0
Magnesium	ppm	ASTM D5185(m)		<b>0</b>	<1
Calcium	ppm	ASTM D5185(m)		<b>0</b>	2
Phosphorus	ppm	ASTM D5185(m)		<b>0</b>	2
Zinc	ppm	ASTM D5185(m)		<b>5</b>	21
Sulfur	ppm	ASTM D5185(m)		<b>57</b>	61
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1

## CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1
Sodium	ppm	ASTM D5185(m)		<b>158</b>	184
Potassium	ppm	ASTM D5185(m)	>20	<b>19</b>	27
Water	%	ASTM D6304*		<b>38.3</b>	39.7
ppm Water	ppm	ASTM D6304*	>10%	<b>383000</b>	397000

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>● 5851</b>	▲ 17459	▲ 12481
Particles >6µm	ASTM D7647	>1300	<b>● 1961</b>	▲ 4916	▲ 3883
Particles >14µm	ASTM D7647	>160	<b>● 314</b>	● 271	● 295
Particles >21µm	ASTM D7647	>40	<b>▲ 82</b>	49	40
Particles >38µm	ASTM D7647	>10	<b>3</b>	4	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	2	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>● 20/18/15</b>	▲ 21/19/15	▲ 21/19/15



# OIL ANALYSIS REPORT

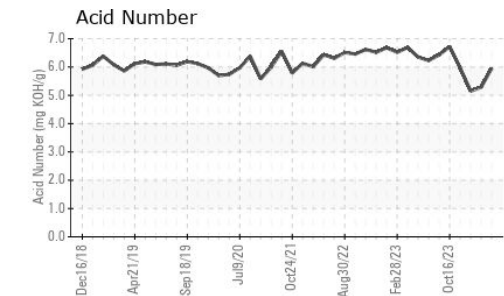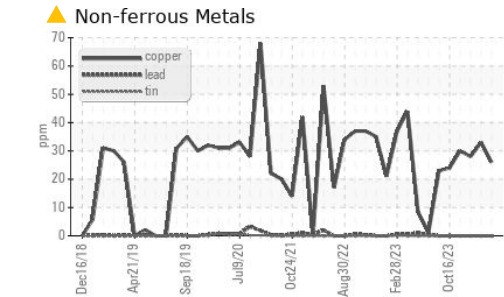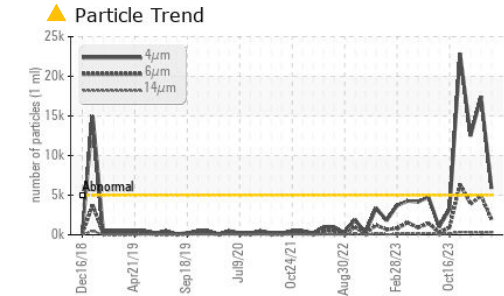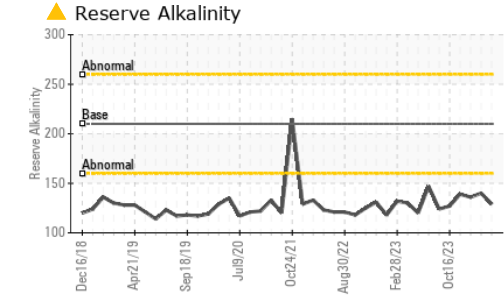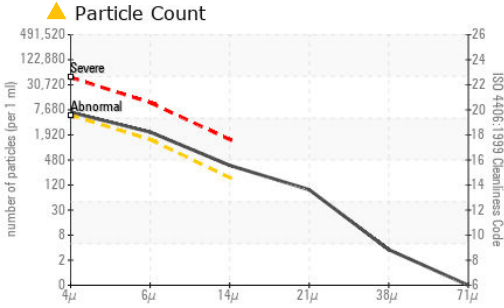

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0926482 **Received** : 22 Mar 2024  
**Lab Number** : 02624042 **Tested** : 26 Mar 2024  
**Unique Number** : 5749161 **Diagnosed** : 26 Mar 2024 - Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KF, pH, PQ, ReserveAlk, TAN Man )

**STELCO - BOSC - Basic Oxygen Slab Caster**  
 2330 Regional Road #3, Door: BOSC8  
 NANTICOKE, ON  
 CA N0A 1L0  
 Contact: Tom Walden  
 Thomas.Walden@stelco.com  
 T: (519)587-4541  
 F: (519)587-7702

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	5.95	5.29	5.15
Alkiline Reserve (Oils)	ml KOH/g	ASTM D1121*	▲ 129	▲ 140	▲ 136

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	FRGLY	FRGLY
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	NEG	>10%	>10%
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
pH	Scale 0-14	ASTM D1287*	9.18	9.31	8.93
Visc @ 40°C	cSt	ASTM D7279(m)	44.1	▲ 37.4	▲ 37.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

