




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

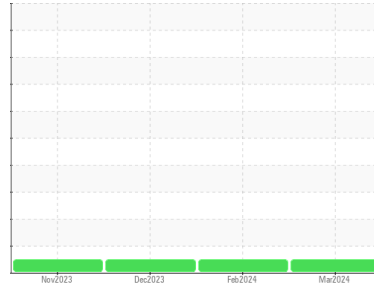

Machine Id  
**2369**

Component  
**Natural Gas Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0891025</b>	WC0891105	WC0878167
Sample Date	Client Info		<b>21 Mar 2024</b>	13 Feb 2024	20 Dec 2023
Machine Age	kms	Client Info	<b>14110</b>	28074	15785
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>14</b>	11	13
Chromium	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>1</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	1	<1
Copper	ppm	ASTM D5185(m)	>35	<b>4</b>	2	4
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>10</b>	6	13
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>49</b>	54	55
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185(m)		<b>746</b>	773	718
Calcium	ppm	ASTM D5185(m)		<b>1171</b>	1234	1179
Phosphorus	ppm	ASTM D5185(m)		<b>603</b>	645	612
Zinc	ppm	ASTM D5185(m)		<b>811</b>	840	791
Sulfur	ppm	ASTM D5185(m)		<b>1875</b>	2029	1984
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>10</b>	7	10
Sodium	ppm	ASTM D5185(m)		<b>3</b>	3	2
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	<1	3

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.7</b>	12.4	11.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.9</b>	25.2	21.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.1</b>	22.1	19.2











# OIL ANALYSIS REPORT

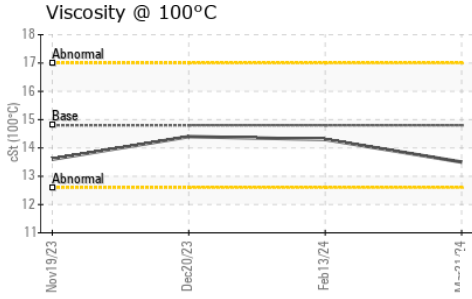

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	13.5	14.3

## GRAPHS

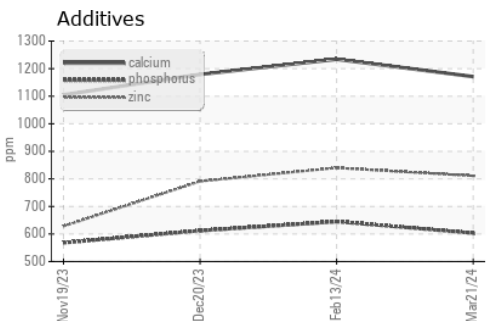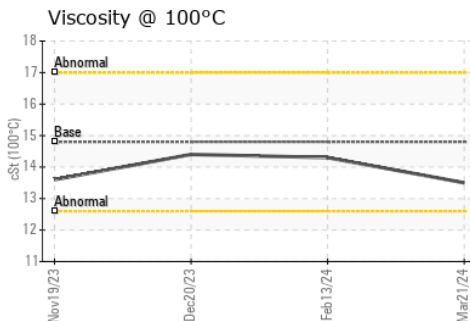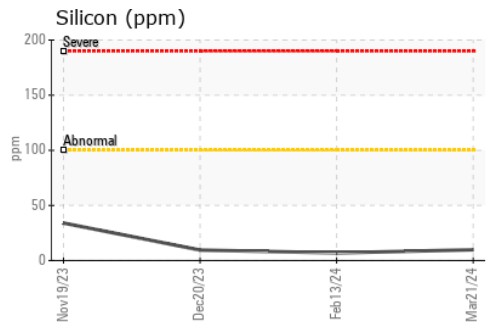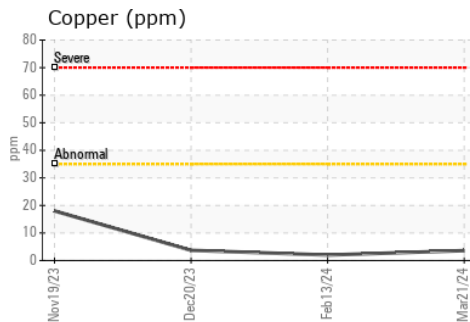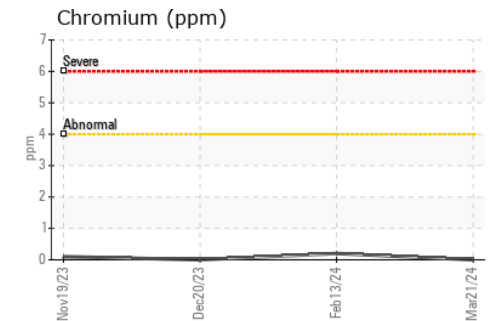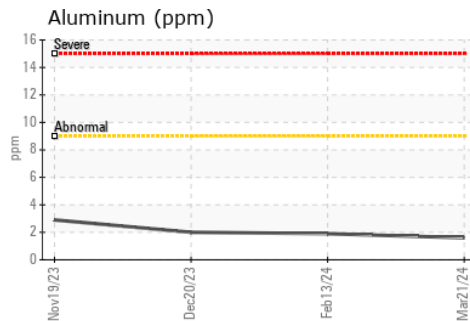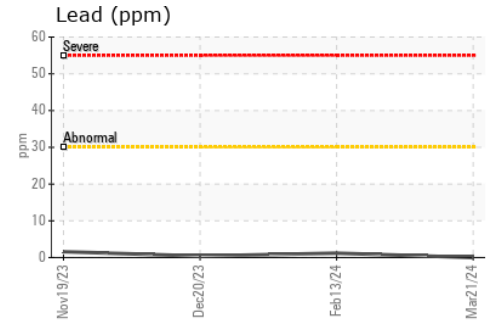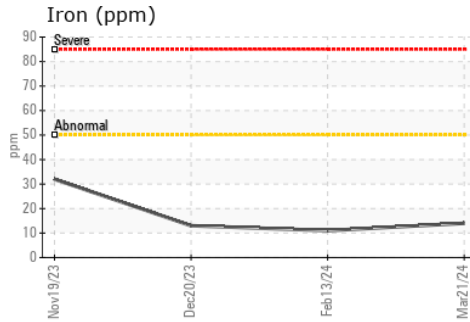

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0891025  
**Lab Number** : 02624670  
**Unique Number** : 5749789  
**Test Package** : MOB 1  
**Received** : 26 Mar 2024  
**Tested** : 26 Mar 2024  
**Diagnosed** : 26 Mar 2024 - Wes Davis

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Ron Skinner  
 ron.skinner@hamilton.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)679-4502