

# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# **100023135 TENSION SYSTEM**

**Hydraulic System** 

DOPPELMAYR SYNT 70T (--- GAL)

### Recommendation

Resample at the next service interval to monitor. Please submit a sample of the new (unused) oil to establish a baseline.

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


### **Fluid Condition**

The condition of the oil is acceptable for the time in service.

			A	pr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0922035		
Sample Date		Client Info		03 Apr 2024		
Machine Age	hrs	Client Info		1245		
Oil Age	hrs	Client Info		1245		
Oil Changed	1113	Client Info		N/A		
Sample Status		Chefit iiiio		NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)	<i>&gt;</i> 20	0		
Vanadium		ASTM D5185(m)		0		
	ppm	. ,		0		
Beryllium	ppm	ASTM D5185(m)		-		
Cadmium	ppm	ASTM D5185(m)	Para St /In a second	0		O
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		5		
Phosphorus	ppm	ASTM D5185(m)		59		
Zinc	ppm	ASTM D5185(m)		4		
Sulfur	ppm	ASTM D5185(m)		1146		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLII	NESS	method	limit/base	current	history1	history2
		ASTM D7647	>5000	857		
Particles >4µm						
'		ASTM D7647	>1300	131		
Particles >6µm		ASTM D7647 ASTM D7647	>1300 >160	131 15		
Particles >6μm Particles >14μm			>160			
Particles >6µm Particles >14µm Particles >21µm		ASTM D7647	>160	15		
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647	>160 >40 >10	15 5		



## **OIL ANALYSIS REPORT**

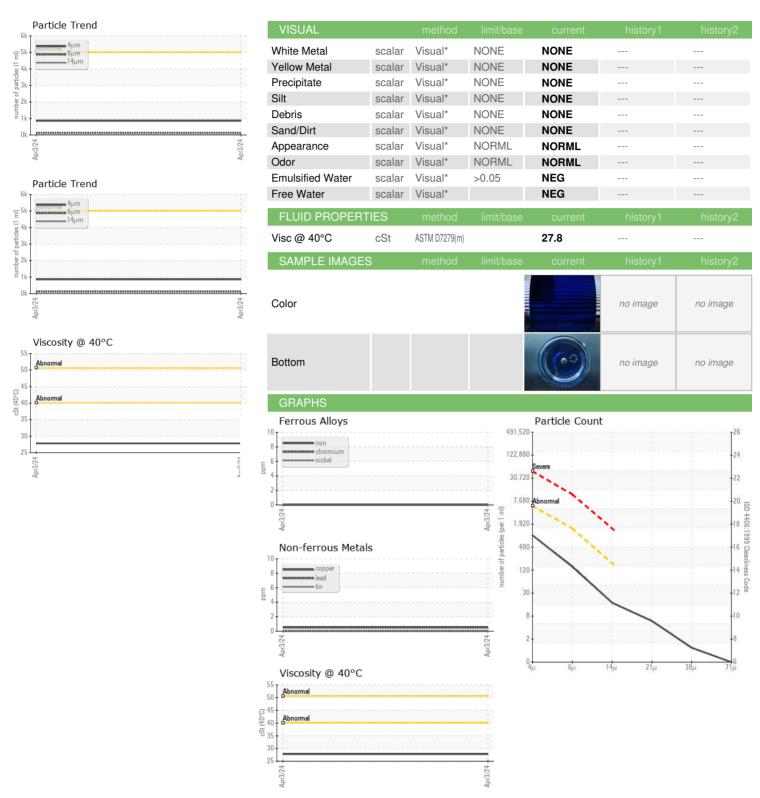



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No.

Lab Number : 02626684

Unique Number : 5759816 Test Package : MOB 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0922035 Received : 04 Apr 2024 **Tested** : 05 Apr 2024

Diagnosed : 05 Apr 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Mount St. Louis Moonstone

R.R. #4,, 24 Mount St. Louis Road Coldwater, ON

CA L0K 1E0 Contact: Andre Huter a.huter@mslm.on.ca T: (705)835-2112

F: (705)835-5967