




# OIL ANALYSIS REPORT

Sample Rating Trend

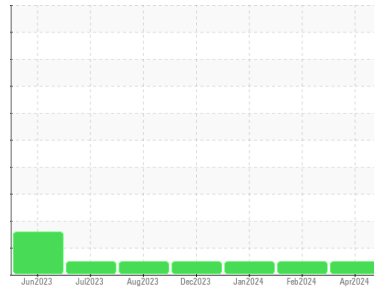

**NORMAL**



Machine Id

**2230**

Component

**Natural Gas Engine**

Fluid

**SAFETY-KLEEN PERFORMANCE PLUS XHD-7 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0917579</b>	WC0890889	WC0891004
Sample Date	Client Info		<b>08 Apr 2024</b>	25 Feb 2024	12 Jan 2024
Machine Age	kms	Client Info	<b>33707</b>	24746	16638
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>8</b>	12	11
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	2	1
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>35	<b>1</b>	2	2
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>21</b>	12	15
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>53</b>	55	52
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>810</b>	821	738
Calcium	ppm	ASTM D5185(m)		<b>1229</b>	1251	1201
Phosphorus	ppm	ASTM D5185(m)		<b>671</b>	736	656
Zinc	ppm	ASTM D5185(m)		<b>850</b>	874	828
Sulfur	ppm	ASTM D5185(m)		<b>1946</b>	2096	2064
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>4</b>	7	11
Sodium	ppm	ASTM D5185(m)		<b>5</b>	3	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	0

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.3</b>	13.1	11.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.5</b>	21.4	20.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>18.0</b>	19.5	18.8











# OIL ANALYSIS REPORT

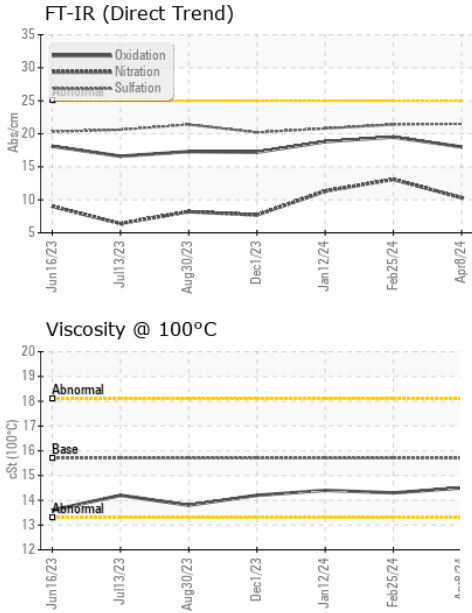

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	14.3	14.4

## GRAPHS

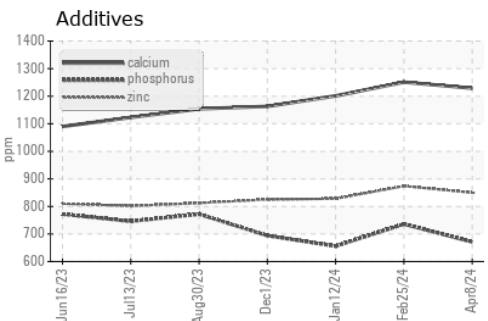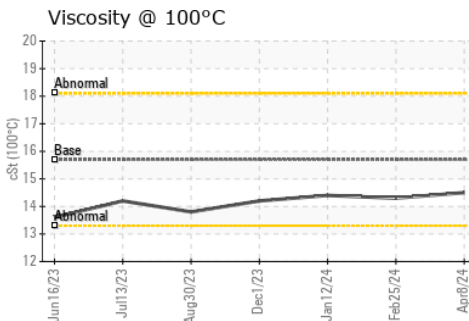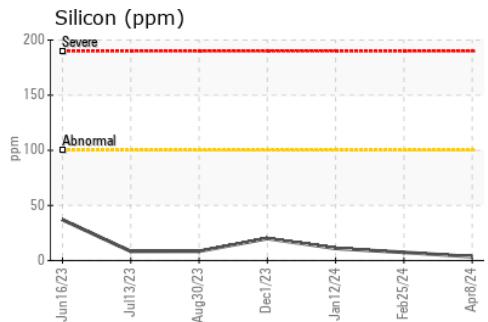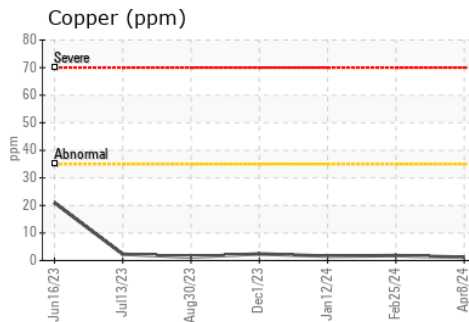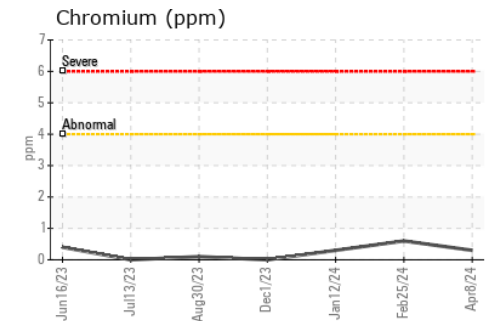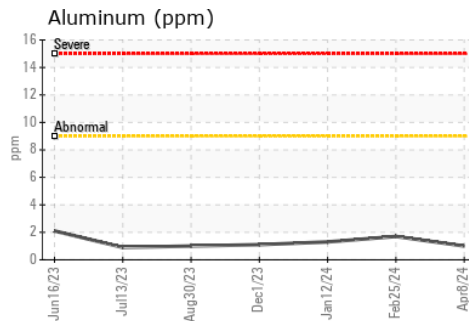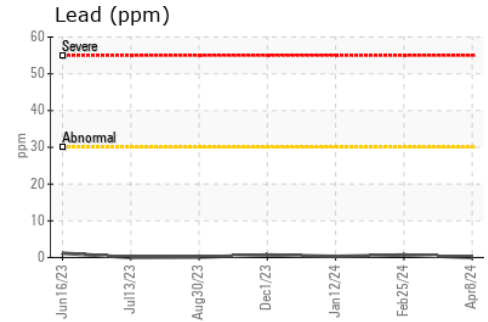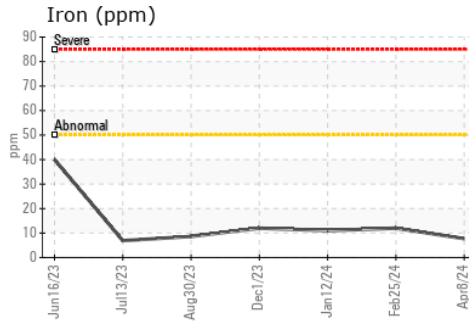

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0917579      **Received** : 12 Apr 2024  
**Lab Number** : 02628389      **Tested** : 12 Apr 2024  
**Unique Number** : 5761521      **Diagnosed** : 12 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.