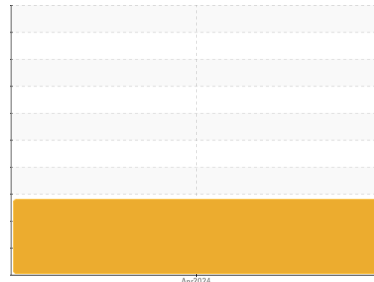




# OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Area

**Goodyear - G04000**

Machine Id  
**A2404086**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

- **Wear**  
Copper and iron ppm levels are noted.
- ▲ **Fluid Condition**  
Phosphorus ppm levels are abnormally high.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Batch #	Client Info		<b>2024 04 0280</b>	---	---
Department	Client Info		<b>Production</b>	---	---
Sample From	Client Info		<b>Machine</b>	---	---
Production Stage	Client Info		<b>Initial</b>	---	---
Sent to WC	Client Info		<b>04/16/2024</b>	---	---
Sample Number	Client Info		<b>E30001875</b>	---	---
Sample Date	Client Info		<b>15 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	● <b>38</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >10	<b>5</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>13</b>	---	---
Copper	ppm	ASTM D5185(m) >20	● <b>99</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

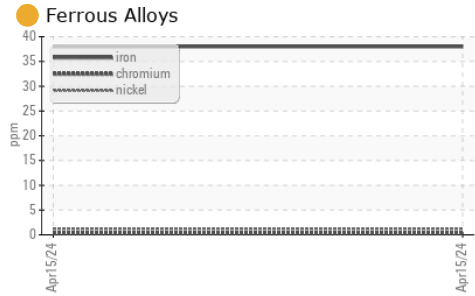
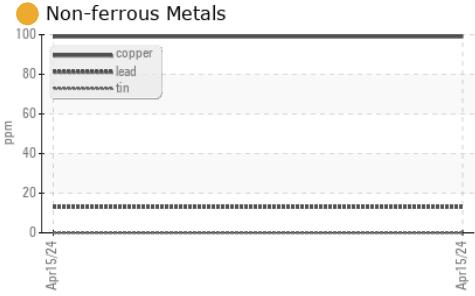
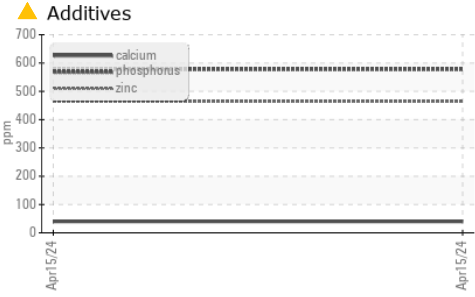
## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m) 25	<b>8</b>	---	---
Calcium	ppm	ASTM D5185(m) 200	<b>40</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 300	▲ <b>578</b>	---	---
Zinc	ppm	ASTM D5185(m) 370	<b>464</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>1902</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---



## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>10</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

# OIL ANALYSIS REPORT



VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>▲ MILKY</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E30001875 **Received** : 18 Apr 2024  
**Lab Number** : **02630025** **Tested** : 18 Apr 2024  
**Unique Number** : 5763157 **Diagnosed** : 22 Apr 2024 - Tatiana Sorkina  
**Test Package** : TEST ( Additional Tests: ICP )

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Jake Debruyn  
 jdebruyn@e360s.ca

To discuss this sample report, contact Customer Service at 1-905-372-2251.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)373-4950