




OIL ANALYSIS REPORT

Sample Rating Trend

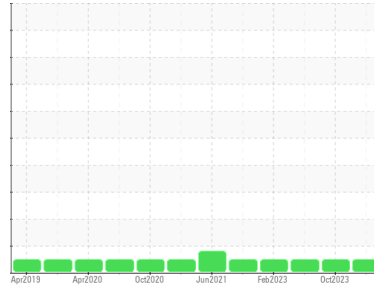

NORMAL



Area
3000 Series
 Machine Id
Navistar 3262

Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 10W30 (26 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0948300	WC0864506	WC0817373
Sample Date	Client Info			07 Jun 2024	06 Oct 2023	11 Jun 2023
Machine Age	mls	Client Info		395379	357139	337284
Oil Age	mls	Client Info		17980	19855	17039
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	27	36	15
Chromium	ppm	ASTM D5185(m)	>5	<1	1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	4	5	3
Lead	ppm	ASTM D5185(m)	>25	0	0	0
Copper	ppm	ASTM D5185(m)	>100	<1	2	1
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	2	2	11
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	67	71	59
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	1117	1158	973
Calcium	ppm	ASTM D5185(m)	3000	1193	1252	1219
Phosphorus	ppm	ASTM D5185(m)	1150	1106	1145	1095
Zinc	ppm	ASTM D5185(m)	1350	1346	1444	1260
Sulfur	ppm	ASTM D5185(m)	4250	2544	2585	2610
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	3	6	7
Sodium	ppm	ASTM D5185(m)		2	2	2
Potassium	ppm	ASTM D5185(m)	>20	2	<1	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.3	0.6	0.2
Nitration	Abs/cm	ASTM D7624*	>20	10.3	13.1	8.8
Sulfation	Abs./1mm	ASTM D7415*	>30	22.2	25.2	20.3



OIL ANALYSIS REPORT

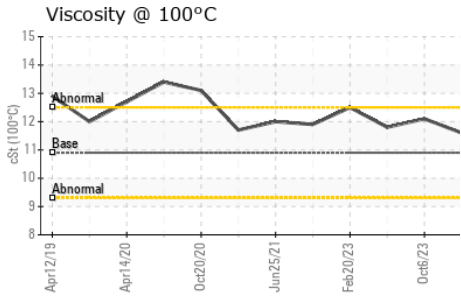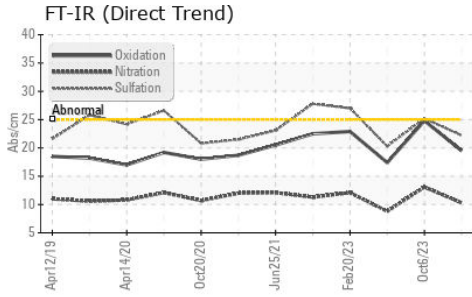

FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	24.8	17.4









VISUAL

method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG
scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	10.9	11.6	12.1

GRAPHS

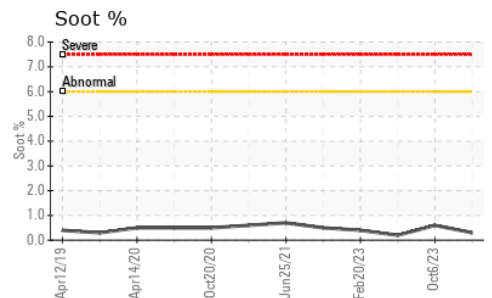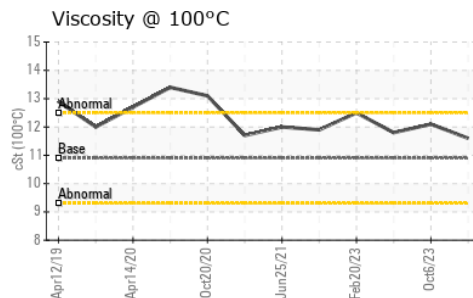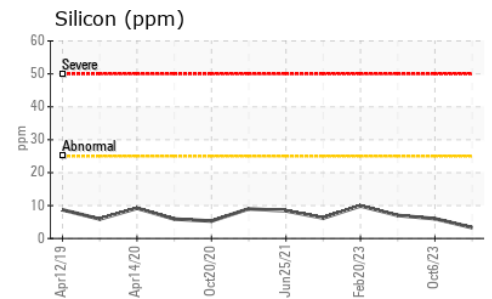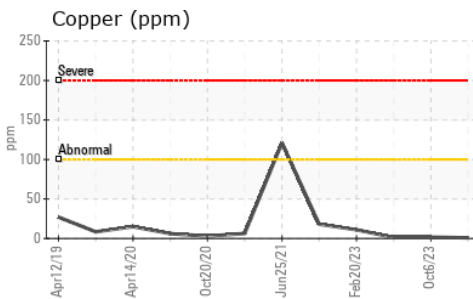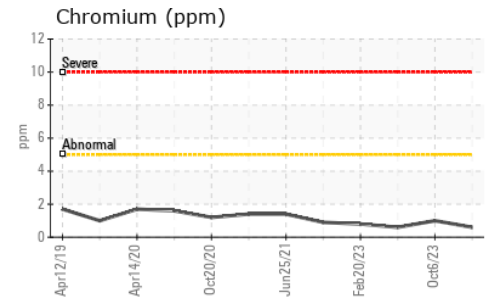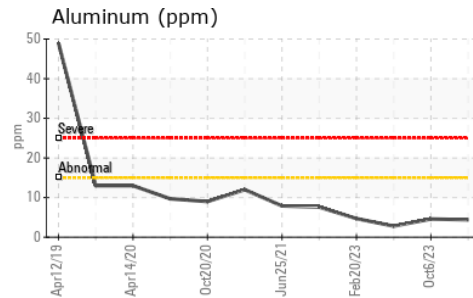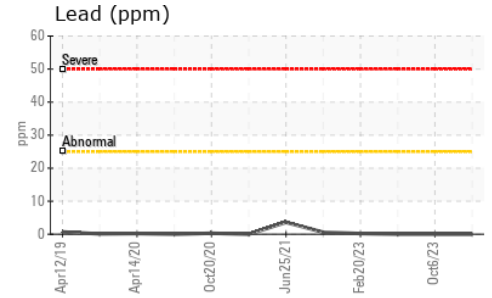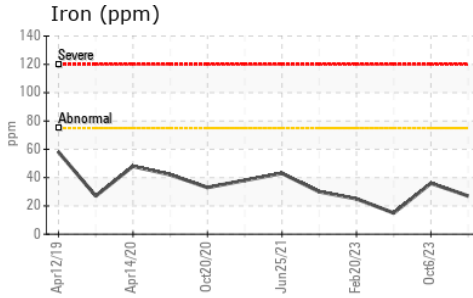

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOULIN TRANSPORT (GARAGE)**
Sample No. : WC0948300 **Received** : 11 Jun 2024 1335 SHAWSON DRIVE
Lab Number : 02641044 **Tested** : 11 Jun 2024 MISSISSAUGA, ON
Unique Number : 5798583 **Diagnosed** : 11 Jun 2024 - Wes Davis CA L4W 1C4
Test Package : MOB 1 **Contact:** Travis Spence
 tspence@manitoulintransport.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

F: (905)564-6361