



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Area

**MINING**

Machine Id

**ME-587 JOHN DEERE 944K 1DW944KXTNL703685**

Component

**Rear Left Final Drive**

Fluid

{not provided} (--- GAL)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0946257</b>	---	---
Sample Date	Client Info			<b>19 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>6919</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.075	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>750	<b>6</b>	---	---
Chromium	ppm	ASTM D5185(m)	>9	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>40	<b>21</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>3</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>29</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>2691</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>948</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1027</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2810</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	<b>11</b>	---	---
Sodium	ppm	ASTM D5185(m)	>51	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---



# OIL ANALYSIS REPORT

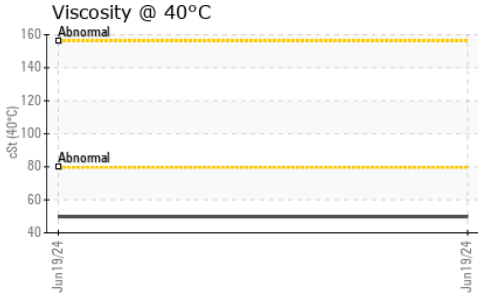



VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.075	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>49.8</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

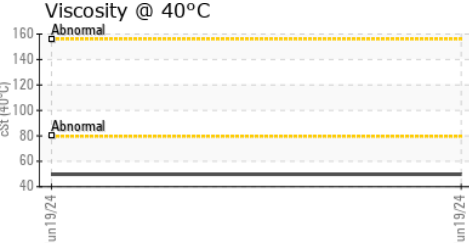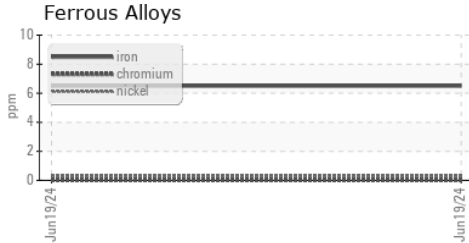

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0946257  
**Lab Number** : **02643454**  
**Unique Number** : 5800993  
**Test Package** : CONST

**Covia Canada Ltd.**  
 260 Unimin Road, County Rd. #46  
 Havelock, ON  
 CA K0L 1Z0  
 Contact: Dan Lyon  
 dan.lyon@coviacorp.com  
 T: (705)632-8904  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.