

OIL ANALYSIS REPORT

Infasco - 102400 A2406129

Unknown Component

FORM & LUBE (--- GAL)

Sample Rating Trend NORMAL

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

Wear

Copper and iron ppm levels are noted.

		Jun 224					
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Batch #		Client Info		2024 05 0912			
Department		Client Info		Production			
Sample From		Client Info		Machine			
Production Stage		Client Info		Final			
Sent to WC		Client Info		06/19/2024			
Sample Number		Client Info		E30002451			
Sample Date		Client Info		19 Jun 2024			
Machine Age	hrs	Client Info		0			
Oil Age	hrs	Client Info		0			
Oil Changed		Client Info		N/A			
Sample Status				NORMAL			
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)		460			
Chromium	ppm	ASTM D5185(m)		<1			
Nickel	ppm	ASTM D5185(m)		10			
Titanium	ppm	ASTM D5185(m)		0			
Silver		ASTM D5185(m)		0			
Aluminum	ppm	ASTM D5185(m)		4			
Lead	ppm	ASTM D5185(m)		2			
Copper	ppm	ASTM D5185(m)		79			
Tin	ppm	ASTM D5185(m)		0			
Antimony	ppm	ASTM D5185(m)		0			
Vanadium	ppm	ASTM D5185(m)		<1			
Beryllium	ppm	ASTM D5185(m)		0			
Cadmium		ASTM D5185(m)		0			
	ppm						
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1			
Barium	ppm	ASTM D5185(m)		<1			
Molybdenum	ppm	ASTM D5185(m)		0			
Manganese	ppm	ASTM D5185(m)		5			
Magnesium	ppm	ASTM D5185(m)		5			
Calcium	ppm	ASTM D5185(m)		346			
Phosphorus	ppm	ASTM D5185(m)		287			
Zinc	ppm	ASTM D5185(m)		56			
Sulfur	ppm	ASTM D5185(m)		1961			
Lithium	ppm	ASTM D5185(m)		<1			
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)		3			
Sodium	ppm	ASTM D5185(m)		4			
Potassium	ppm	ASTM D5185(m)	>20	<1			

ASTM D6304*

ASTM D6304*

ppm

Water


ppm Water

0.004

48



OIL ANALYSIS REPORT

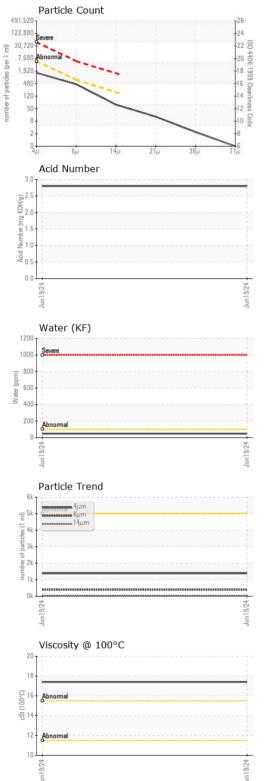

FLUID CLEANLIN	IECC	ام مالم مدر	limit/base		المرسمة ما ما	0. سوادانا
	IESS	method		current	history1	history2
Particles >4µm		ASTM D7647	>5000	1386		
Particles >6µm		ASTM D7647	>640	390		
Particles >14µm		ASTM D7647	>160	41		
Particles >21μm		ASTM D7647	>40	11		
Particles >38μm		ASTM D7647	>10	2		
Particles >71μm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	18/16/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		2.80		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		189		
Visc @ 100°C	cSt	ASTM D7279(m)		17.4		
Viscosity Index (VI)	Scale	ASTM D2270*		98		
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image





Laboratory

Sample No.

: E30002451 Lab Number : 02643519 Unique Number : 5801058

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 21 Jun 2024

Tested : 25 Jun 2024 : 25 Jun 2024 - Aylwin Lee Diagnosed

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950