




# OIL ANALYSIS REPORT

## Sample Rating Trend

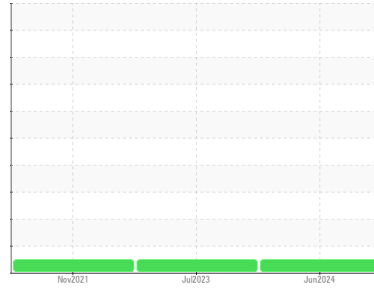

**NORMAL**



Machine Id  
**111-12358-3**

Component  
**Gearbox**

Fluid  
**ESSO SPARTAN EP 320 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0946922</b>	WC0818454	WC0612834
Sample Date	Client Info			<b>17 Jun 2024</b>	10 Jul 2023	23 Nov 2021
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>58</b>	35	27
Iron	ppm	ASTM D5185(m)	>200	<b>87</b>	78	70
Chromium	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>100	<b>5</b>	5	5
Copper	ppm	ASTM D5185(m)	>200	<b>2</b>	2	1
Tin	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	.4	<b>18</b>	18	21
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	<b>4</b>	5	4
Calcium	ppm	ASTM D5185(m)	0	<b>21</b>	22	22
Phosphorus	ppm	ASTM D5185(m)	250	<b>239</b>	270	262
Zinc	ppm	ASTM D5185(m)	0	<b>2</b>	3	1
Sulfur	ppm	ASTM D5185(m)		<b>11787</b>	12151	11857
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>8</b>	9	9
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.75	<b>0.56</b>	0.53	0.65




# OIL ANALYSIS REPORT

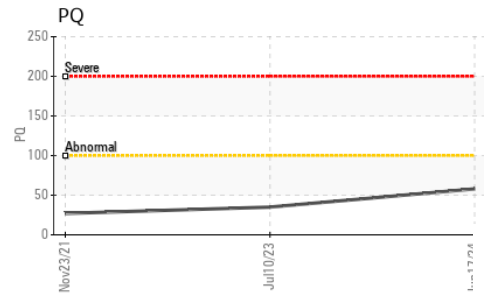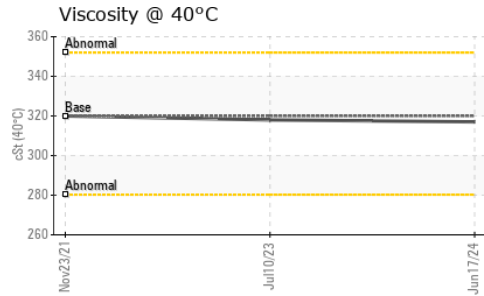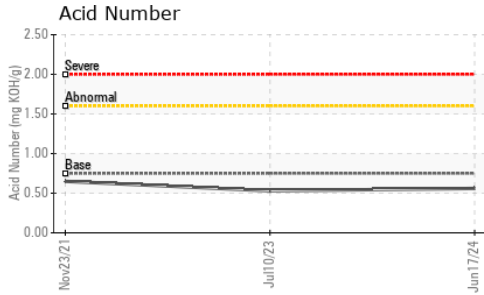






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	320	317	318

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

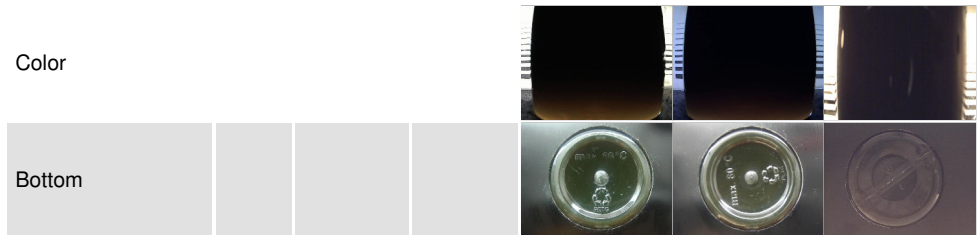

## GRAPHS

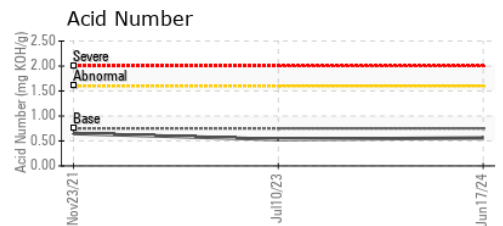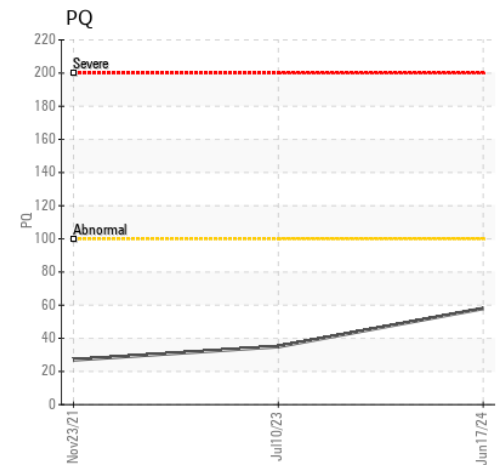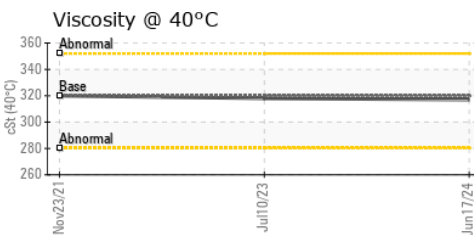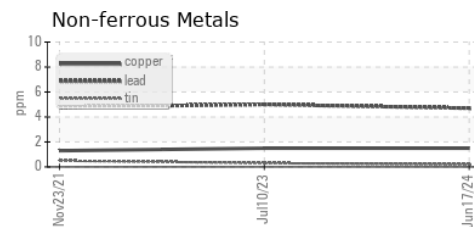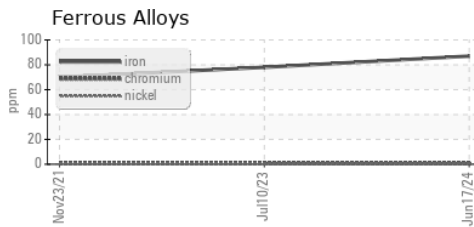

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0946922 **Received** : 28 Jun 2024  
**Lab Number** : 02644709 **Tested** : 02 Jul 2024  
**Unique Number** : 5802248 **Diagnosed** : 02 Jul 2024 - Wes Davis  
**Test Package** : IND 2

**DXP - SCS - Sabic IP Cobourg**  
 44 Normar Road  
 Cobourg, ON  
 CA K9A 4L7  
 Contact: George DiFrancesco  
 george.difrancesco@sabic.com  
 T: (905)373-3988  
 F: (905)373-3844

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.