




OIL ANALYSIS REPORT

Sample Rating Trend

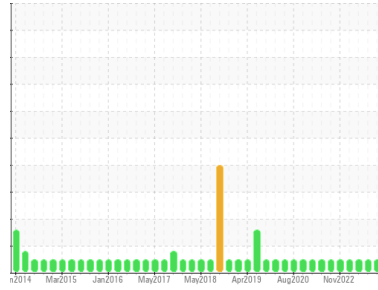

NORMAL



Area

(N580CX)

Machine Id

BEECHCRAFT TH2277/1001703

Component

Right Piston Aircraft Engine

Fluid

SHELL AEROSHELL W 15W50 MGR (11 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0957291	WC0502695	WC0502693
Sample Date	Client Info		13 Jun 2024	27 Feb 2024	12 Jul 2023
TSN	hrs	Client Info	1531	1515	1488
TSO	hrs	Client Info	0	1515	1488
Oil Age	hrs	Client Info	16	7	16
Oil Changed		Client Info	N/A	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	12	13	14
Chromium	ppm	ASTM D5185(m)	>20	3	3	4
Nickel	ppm	ASTM D5185(m)	>15	3	3	3
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	6	5	5
Lead	ppm	ASTM D5185(m)	>20000	2473	1942	2304
Copper	ppm	ASTM D5185(m)	>25	5	4	6
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		<1	0	<1

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	1	1	2
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	10	<1	<1	2
Calcium	ppm	ASTM D5185(m)	10	1	2	4
Phosphorus	ppm	ASTM D5185(m)	1280	1149	1203	1267
Zinc	ppm	ASTM D5185(m)	10	4	3	7
Sulfur	ppm	ASTM D5185(m)	1800	1382	1383	1078
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	4	4	4
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1






OIL ANALYSIS REPORT

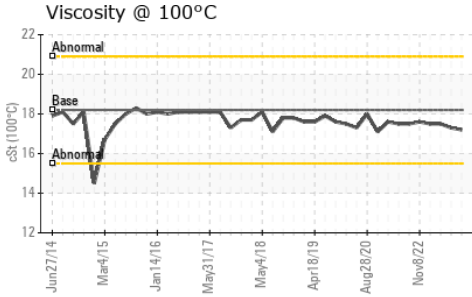

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	17.2	17.3	17.5

GRAPHS

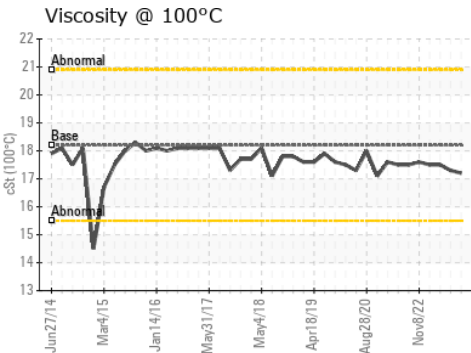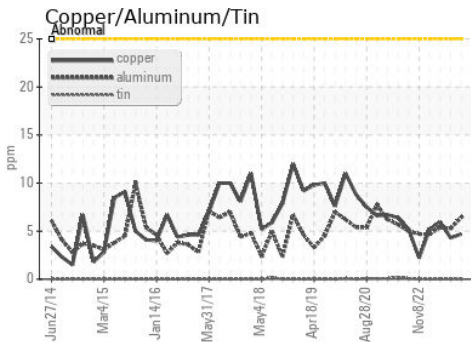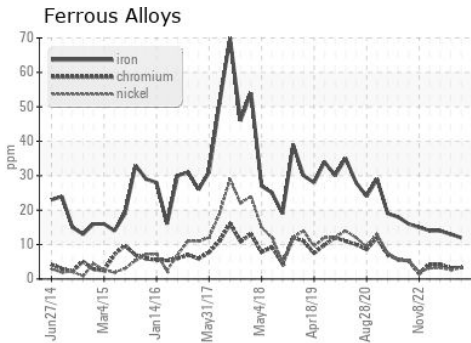

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0957291 **Received** : 03 Jul 2024
Lab Number : **02645251** **Tested** : 03 Jul 2024
Unique Number : 5802790 **Diagnosed** : 03 Jul 2024 - Kevin Marson
Test Package : AVI 1

ONEX FLIGHT PARTNERS
 6120 MIDFIELD ROAD
 MISSISSAUGA, ON
 CA L4W 2P7
 Contact: Shane Nicholson
 shane.n@onexflight.com
 T: (905)673-7711
 F: (905)673-6823

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.