




OIL ANALYSIS REPORT

Sample Rating Trend

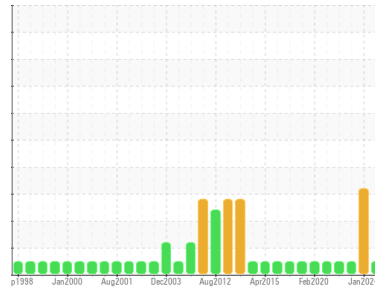

NORMAL



Area

Caster/Segment Drives

Machine Id

B - Strand 2 - 1 Gear Box Roll # 65 Top

Component

Gearbox

Fluid

SHELL OMALA 220 (45 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0968483	WC0898687	WC0824366
Sample Date	Client Info	17 Jul 2024	10 Jan 2024	30 May 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >5	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184* >DFLT	0	---	2
Iron	ppm ASTM D5185(m) >200	28	---	31
Chromium	ppm ASTM D5185(m) >15	<1	---	0
Nickel	ppm ASTM D5185(m) >15	<1	---	0
Titanium	ppm ASTM D5185(m)	0	---	<1
Silver	ppm ASTM D5185(m)	<1	---	0
Aluminum	ppm ASTM D5185(m) >25	3	---	2
Lead	ppm ASTM D5185(m) >100	0	---	0
Copper	ppm ASTM D5185(m) >200	<1	---	0
Tin	ppm ASTM D5185(m) >25	0	---	0
Antimony	ppm ASTM D5185(m) >5	0	---	0
Vanadium	ppm ASTM D5185(m)	0	---	0
Beryllium	ppm ASTM D5185(m)	0	---	0
Cadmium	ppm ASTM D5185(m)	0	---	0

ADDITIVES






method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 4.4	10	---	8
Barium	ppm ASTM D5185(m) 0.0	0	---	0
Molybdenum	ppm ASTM D5185(m) 0	0	---	0
Manganese	ppm ASTM D5185(m)	<1	---	<1
Magnesium	ppm ASTM D5185(m) 0	2	---	2
Calcium	ppm ASTM D5185(m) 0	5	---	3
Phosphorus	ppm ASTM D5185(m) 215	335	---	352
Zinc	ppm ASTM D5185(m) 0	2	---	2
Sulfur	ppm ASTM D5185(m) 7039	10120	---	10190
Lithium	ppm ASTM D5185(m)	<1	---	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >50	4	---	4
Sodium	ppm ASTM D5185(m)	<1	---	1
Potassium	ppm ASTM D5185(m) >20	<1	---	<1



OIL ANALYSIS REPORT

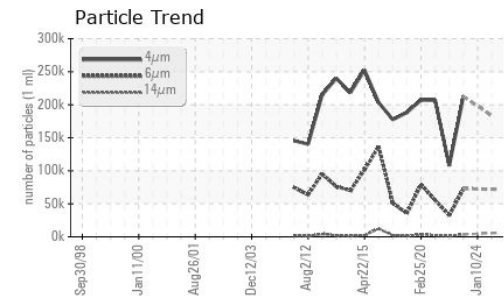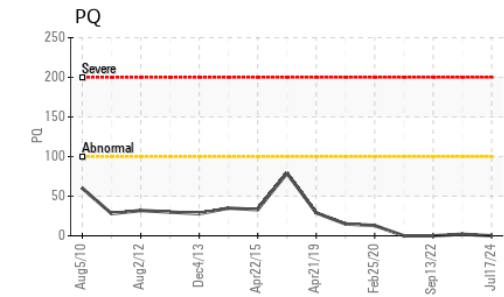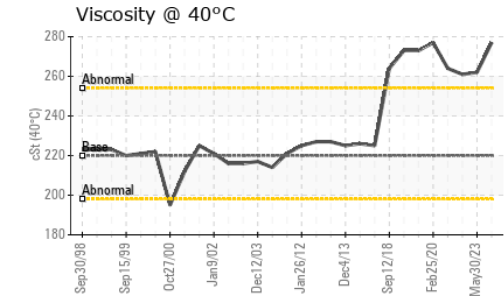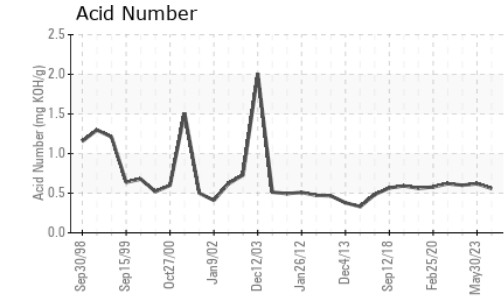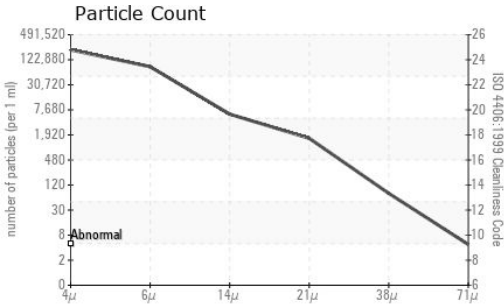


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		183643	---	212456
Particles >6µm	ASTM D7647	>10240000	72172	---	72531
Particles >14µm	ASTM D7647	>10240000	5284	---	3623
Particles >21µm	ASTM D7647	>2560000	1396	---	837
Particles >38µm	ASTM D7647	>640000	67	---	18
Particles >71µm	ASTM D7647	>160000	4	---	1
Oil Cleanliness	ISO 4406 (c)	>--/30/30	25/23/20	---	25/23/19

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*		0.56	---	0.62

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	LIGHT	NONE	VLITE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	VLITE	NONE	NONE
Debris	scalar Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	VLITE
Appearance	scalar Visual*	NORML	NORML	▲ NOOIL	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>5	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	220	277	---	262

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

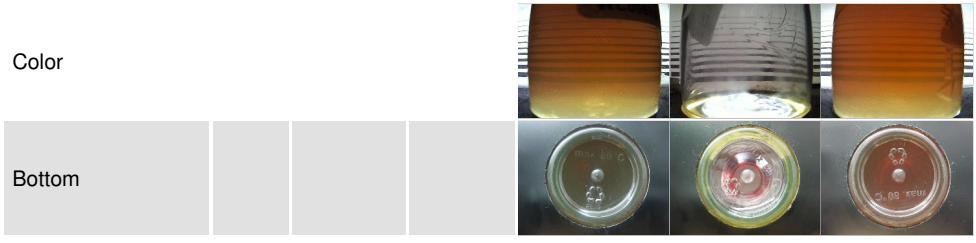

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0968483
Lab Number : **02648527**
Unique Number : 5814079
Test Package : IND 2 (Additional Tests: PQ, PrtCount)

STELCO - BOSC - Basic Oxygen Slab Caster
 2330 Regional Road #3, Door: BOSC8
 NANTICOKE, ON
 CA N0A 1L0
 Contact: Tom Walden
 Thomas.Walden@stelco.com
 T: (519)587-4541
 F: (519)587-7702

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.