




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
KANSAS/44
 Machine Id
87.18L [KANSAS^44]
 Component
Hydraulic System
 Fluid
MOBIL MOBILFLUID 424 (--- GAL)

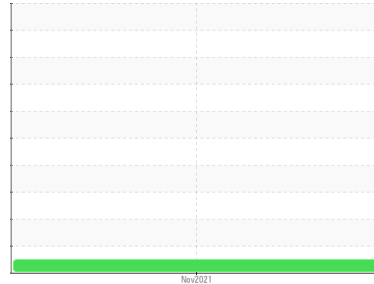

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0598589	---	---
Sample Date	Client Info		05 Nov 2021	---	---
Machine Age	Client Info		1178	---	---
Oil Age	Client Info		500	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	4	---	---
Chromium	ppm	ASTM D5185m >10	0	---	---
Nickel	ppm	ASTM D5185m	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >10	0	---	---
Lead	ppm	ASTM D5185m >10	0	---	---
Copper	ppm	ASTM D5185m >75	4	---	---
Tin	ppm	ASTM D5185m >10	0	---	---
Antimony	ppm	ASTM D5185m	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m	3	---	---
Calcium	ppm	ASTM D5185m	100	---	---
Phosphorus	ppm	ASTM D5185m	578	---	---
Zinc	ppm	ASTM D5185m	731	---	---
Sulfur	ppm	ASTM D5185m	1343	---	---

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	8	---	---
Sodium	ppm	ASTM D5185m	0	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		10409	---	---
Particles >6µm	ASTM D7647	>2500	678	---	---
Particles >14µm	ASTM D7647	>640	23	---	---
Particles >21µm	ASTM D7647	>160	6	---	---
Particles >38µm	ASTM D7647	>40	0	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>--/18/16	21/17/12	---	---



OIL ANALYSIS REPORT

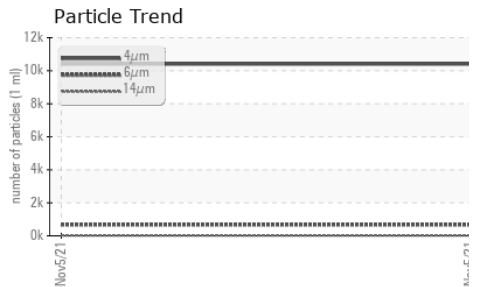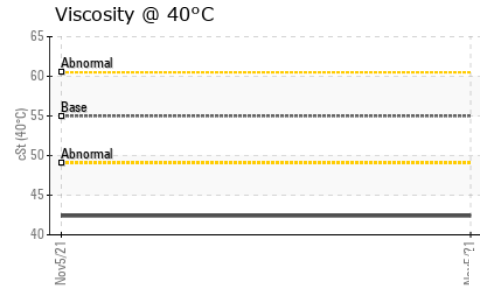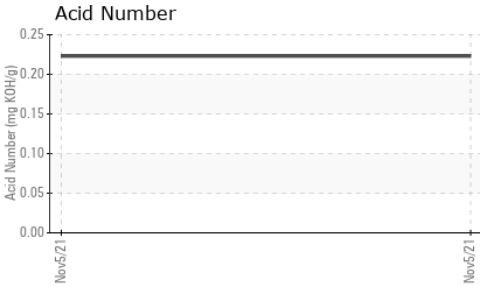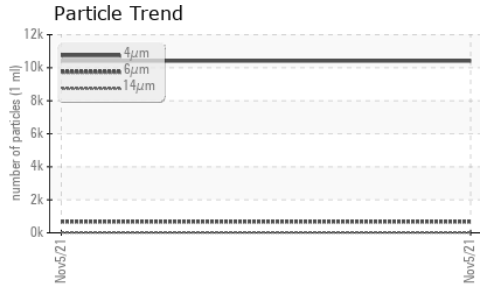

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.223	---	---




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	VLITE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	55	42.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

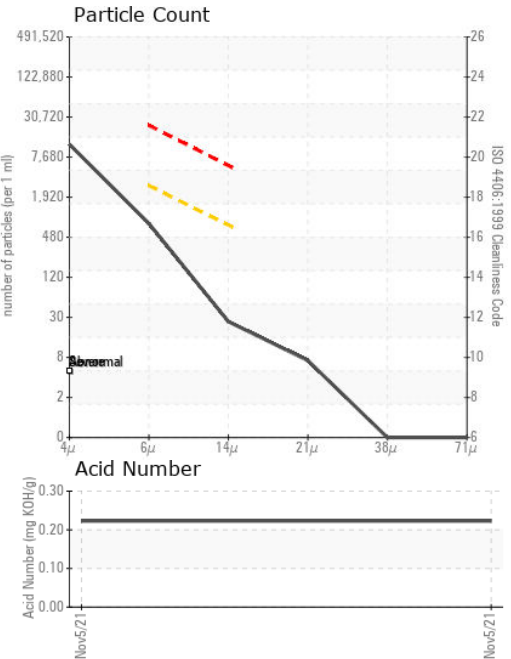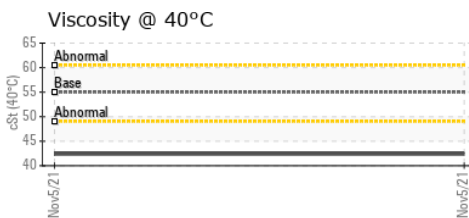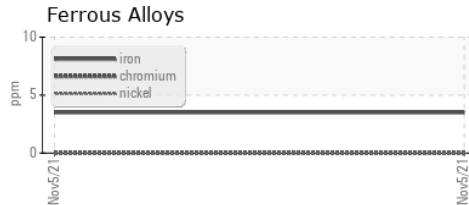

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0598589
 Lab Number : **05401004**
 Unique Number : 9740154
 Test Package : MOBCE

Received : 15 Nov 2021
 Tested : 16 Nov 2021
 Diagnosed : 16 Nov 2021 - Don Baldrige

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net
 T: (316)943-6491
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)