




# OIL ANALYSIS REPORT

Sample Rating Trend

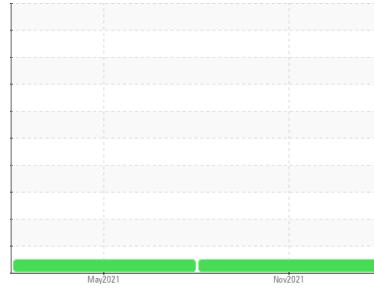

Machine Id  
**7471622 (S/N 1038)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KC95721</b>	KC90141	---
Sample Date	Client Info		<b>17 Nov 2021</b>	20 May 2021	---
Machine Age	hrs	Client Info	<b>501</b>	368	---
Oil Age	hrs	Client Info	<b>501</b>	368	---
Oil Changed	Client Info		<b>Changed</b>	Not Changd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>1</b>	<1	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >50	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	---
Antimony	ppm	ASTM D5185m	<b>3</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>19</b>	<1	---
Barium	ppm	ASTM D5185m 90	<b>18</b>	57	---
Molybdenum	ppm	ASTM D5185m 0	<b>2</b>	0	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 100	<b>88</b>	79	---
Calcium	ppm	ASTM D5185m 0	<b>2</b>	2	---
Phosphorus	ppm	ASTM D5185m 0	<b>5</b>	0	---
Zinc	ppm	ASTM D5185m 0	<b>5</b>	0	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	---
Sodium	ppm	ASTM D5185m	<b>10</b>	7	---
Potassium	ppm	ASTM D5185m >20	<b>8</b>	3	---
Water	%	ASTM D6304 >0.05	<b>0.019</b>	0.025	---
ppm Water	ppm	ASTM D6304 >500	<b>199.8</b>	259.5	---






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>4218</b>	2611	---
Particles >6µm	ASTM D7647 >1300		<b>992</b>	607	---
Particles >14µm	ASTM D7647 >80		<b>42</b>	36	---
Particles >21µm	ASTM D7647 >20		<b>11</b>	10	---
Particles >38µm	ASTM D7647 >4		<b>0</b>	0	---
Particles >71µm	ASTM D7647 >3		<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>17/13</b>	16/12	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.381</b>	0.355	---


# OIL ANALYSIS REPORT

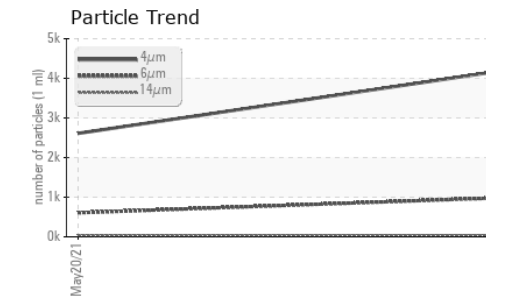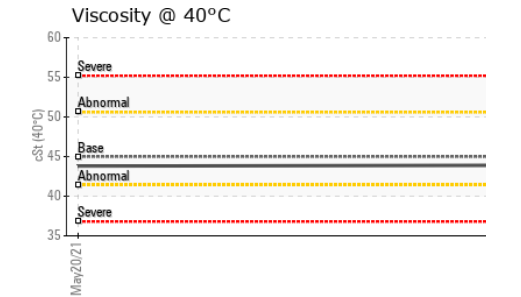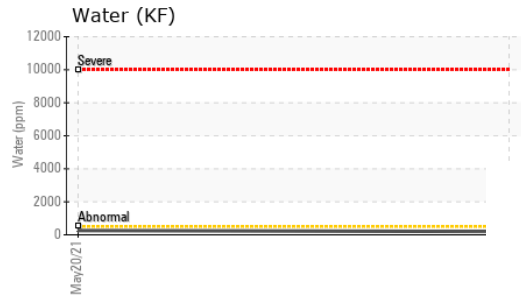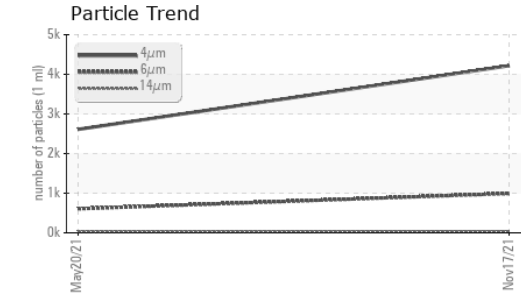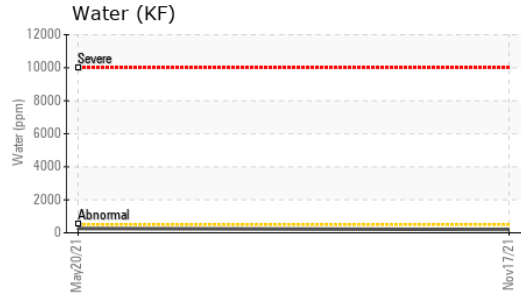






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	43.9	43.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

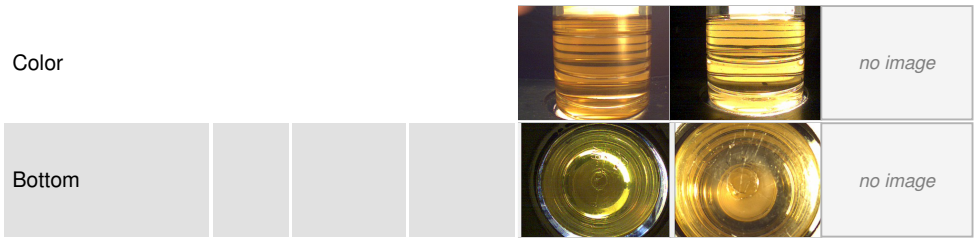

## GRAPHS

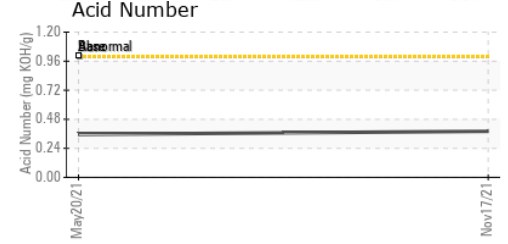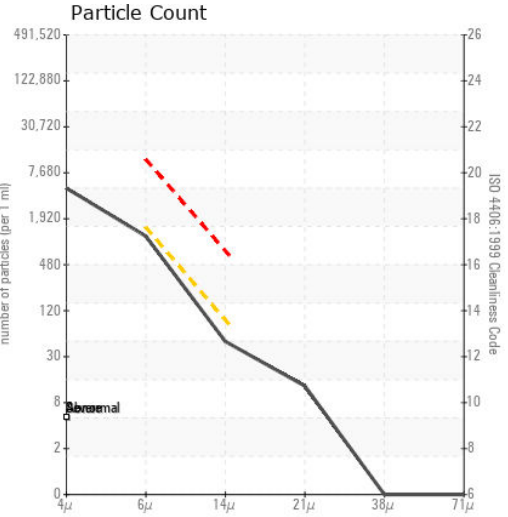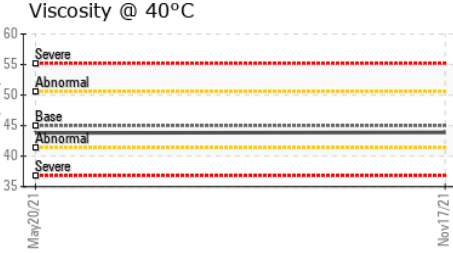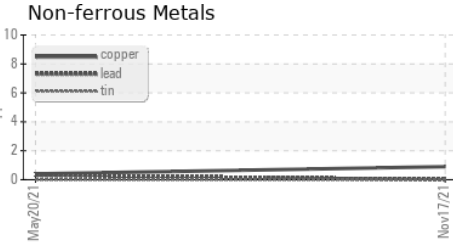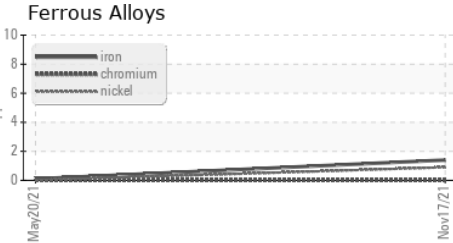

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC95721 **Received** : 24 Nov 2021  
**Lab Number** : 05408736 **Diagnosed** : 26 Nov 2021  
**Unique Number** : 9752899 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**PIPELINE DEVELOPMENT**  
 11792 ALAMEDA DR  
 STRONGSVILLE, OH  
 US 44149  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: