



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
PETERBILT 18656

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 68 (40 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KL0006444	---	---
Sample Date	Client Info	09 Jun 2022	---	---
Machine Age	mls	Client Info	0	---
Oil Age	mls	Client Info	0	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ATTENTION	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	1	---
Chromium	ppm	ASTM D5185m >10	0	---
Nickel	ppm	ASTM D5185m	0	---
Titanium	ppm	ASTM D5185m	0	---
Silver	ppm	ASTM D5185m	<1	---
Aluminum	ppm	ASTM D5185m >10	1	---
Lead	ppm	ASTM D5185m >10	<1	---
Copper	ppm	ASTM D5185m >75	3	---
Tin	ppm	ASTM D5185m >10	<1	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<1	---
Barium	ppm	ASTM D5185m 5	2	---
Molybdenum	ppm	ASTM D5185m 5	0	---
Manganese	ppm	ASTM D5185m	0	---
Magnesium	ppm	ASTM D5185m 25	1	---
Calcium	ppm	ASTM D5185m 200	44	---
Phosphorus	ppm	ASTM D5185m 300	334	---
Zinc	ppm	ASTM D5185m 370	419	---
Sulfur	ppm	ASTM D5185m 2500	947	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<1	---
Sodium	ppm	ASTM D5185m	0	---
Potassium	ppm	ASTM D5185m >20	1	---

FLUID CLEANLINESS




method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	8297	---	---
Particles >6µm	ASTM D7647 >1300	▲ 1927	---	---
Particles >14µm	ASTM D7647 >160	117	---	---
Particles >21µm	ASTM D7647 >40	24	---	---
Particles >38µm	ASTM D7647 >10	1	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >17/14	▲ 18/14	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.36	---



OIL ANALYSIS REPORT

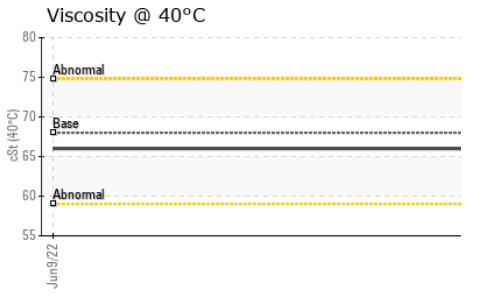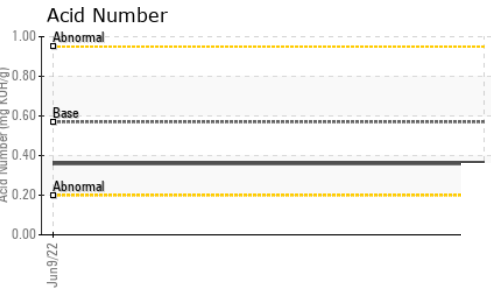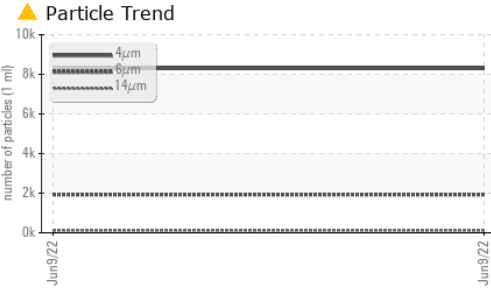





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	66.0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

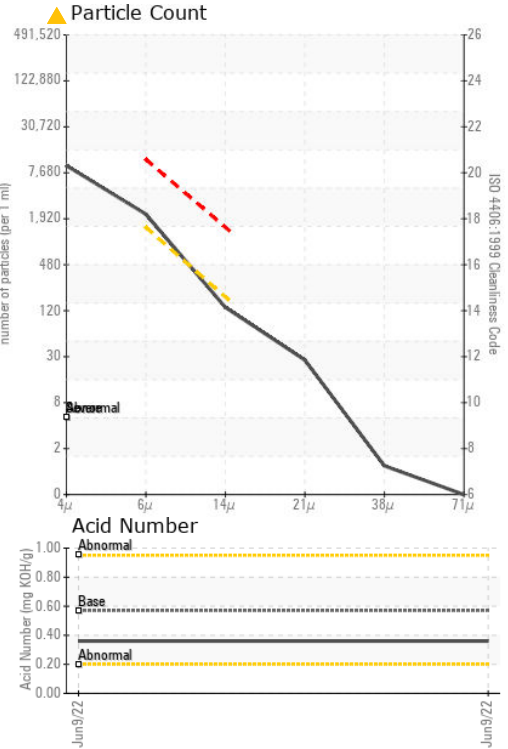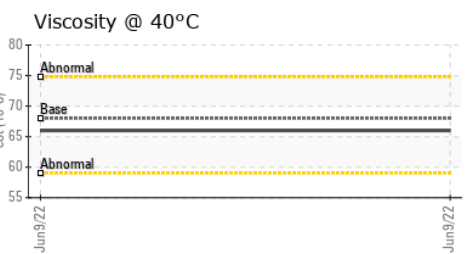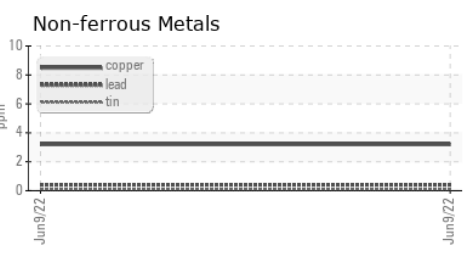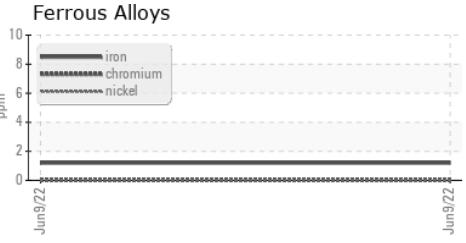

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0006444 **Received** : 13 Jul 2022
Lab Number : 05590173 **Diagnosed** : 15 Jul 2022
Unique Number : 10049620 **Diagnostician** : Don Baldrige
Test Package : MOB 2

CITY OF SCOTTSDALE
 9191 EAST SAN SALVADOR
 SCOTTSDALE, AZ
 US 85258
 Contact: BILL KOHN
 wkohn@scottsdaleaz.gov
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)