




OIL ANALYSIS REPORT

Sample Rating Trend

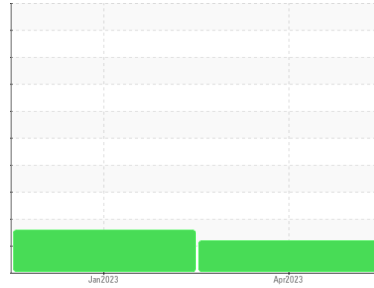

ISO



Machine Id
SLITTER HEAD

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0781313	WC0761482	---
Sample Date	Client Info		20 Apr 2023	22 Jan 2023	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	4	7	---
Chromium	ppm	ASTM D5185m >20	0	0	---
Nickel	ppm	ASTM D5185m >20	0	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >20	0	0	---
Lead	ppm	ASTM D5185m >20	0	0	---
Copper	ppm	ASTM D5185m >20	0	0	---
Tin	ppm	ASTM D5185m >20	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	3	---
Barium	ppm	ASTM D5185m	0	<1	---
Molybdenum	ppm	ASTM D5185m	<1	<1	---
Manganese	ppm	ASTM D5185m	0	0	---
Magnesium	ppm	ASTM D5185m	<1	<1	---
Calcium	ppm	ASTM D5185m	36	34	---
Phosphorus	ppm	ASTM D5185m	333	328	---
Zinc	ppm	ASTM D5185m	367	329	---
Sulfur	ppm	ASTM D5185m	3712	3884	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	3	3	---
Sodium	ppm	ASTM D5185m	0	0	---
Potassium	ppm	ASTM D5185m >20	<1	1	---
Water	%	ASTM D6304 >0.05	NEG	NEG	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 62731	▲ 98264	---
Particles >6µm	ASTM D7647	>1300	▲ 8857	▲ 18738	---
Particles >14µm	ASTM D7647	>160	113	▲ 266	---
Particles >21µm	ASTM D7647	>40	18	30	---
Particles >38µm	ASTM D7647	>10	4	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/20/14	▲ 24/21/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.39	0.45	---




OIL ANALYSIS REPORT

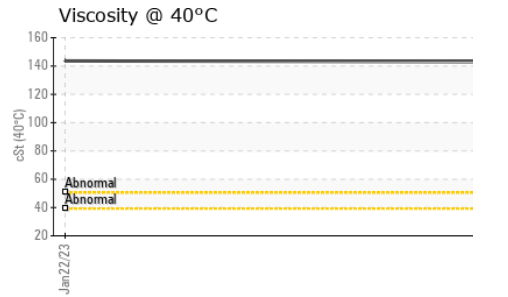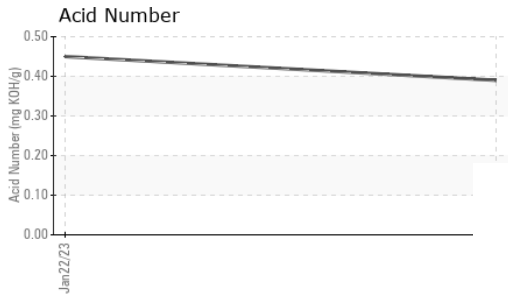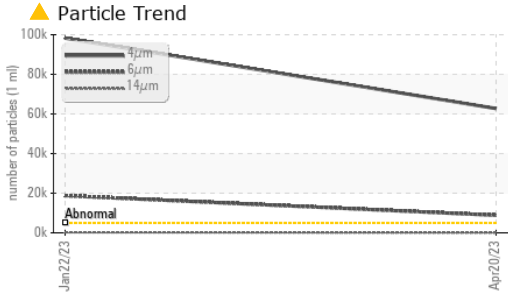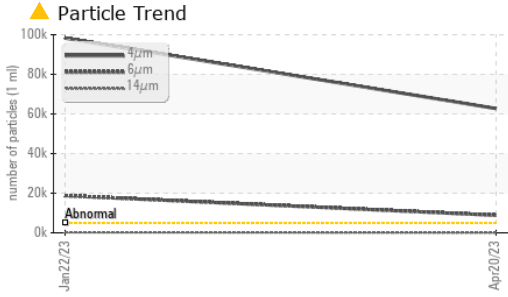





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	VLITE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	143	143.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

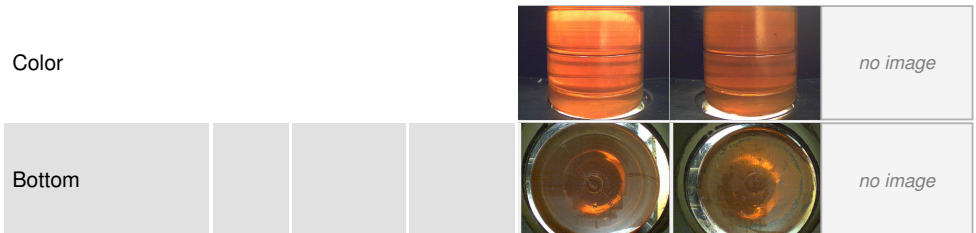

GRAPHS

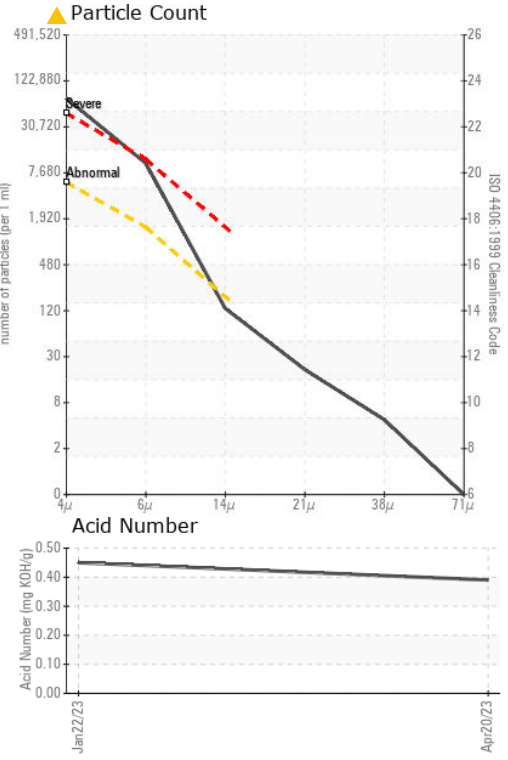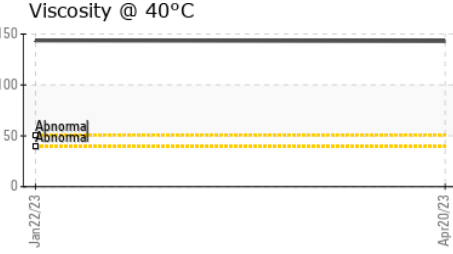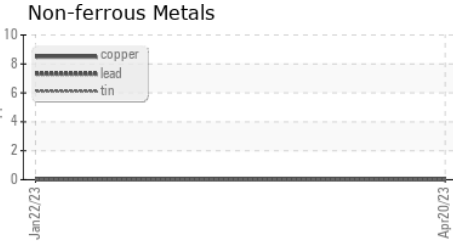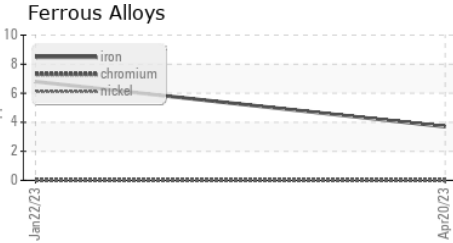

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0781313 **Received** : 05 May 2023
Lab Number : 05839351 **Diagnosed** : 23 May 2023
Unique Number : 10458154 **Diagnostician** : Jonathan Hester
Test Package : PLANT

ALL METALS PROCESSING & LOGISTICS
 100 ALL METALS DR
 CARTERSVILLE, GA
 US 30120
 Contact: JASON WEISS
 jasonweiss@allmetals.com
 T: (770)427-7379
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)