




PROBLEM SUMMARY

Sample Rating Trend

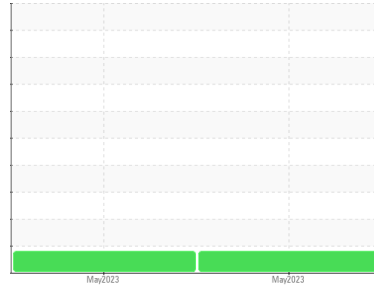


ISO



Area
Paper Machine
 Machine Id
Dry End Lubrication System
 Component
Bearing Lube
 Fluid
MOBIL DTE PM 220 (20000 LTR)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

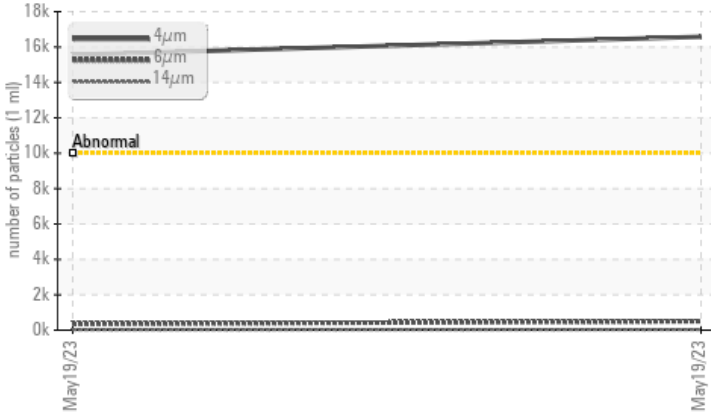

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor. (Customer Sample Comment: Sample after the heat exchanger to check ppm of water make sure the heat exchanger is not the source of water ingress)

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	ATTENTION	---
Particles >4µm	ASTM D7647	>10000	▲ 15564	▲ 16579	---
Oil Cleanliness	ISO 4406 (c)	>20/18/14	▲ 21/16/12	▲ 21/16/12	---

Customer Id: CASASH
 Sample No.: WC0776579
 Lab Number: 05858554
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

19 May 2023 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 6 microns in size) present in the oil. The water content is negligible. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
Paper Machine
 Machine Id
Dry End Lubrication System
 Component
Bearing Lube
 Fluid
MOBIL DTE PM 220 (20000 LTR)

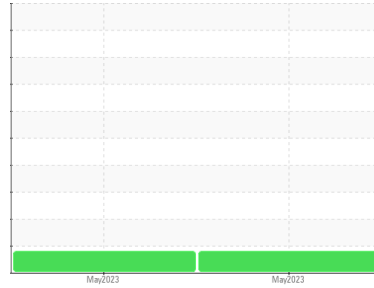

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Sample after the heat exchanger to check ppm of water make sure the heat exchanger is not the source of water ingress)

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil. The water content is negligible.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0776579	WC0776578	---
Sample Date	Client Info		19 May 2023	19 May 2023	---
Machine Age	mths	Client Info	0	0	---
Oil Age	mths	Client Info	6	6	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ATTENTION	ATTENTION	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	26	25	---
Chromium	ppm	ASTM D5185m >5	<1	<1	---
Nickel	ppm	ASTM D5185m >20	0	0	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m	<1	<1	---
Aluminum	ppm	ASTM D5185m >4	1	1	---
Lead	ppm	ASTM D5185m >30	<1	<1	---
Copper	ppm	ASTM D5185m >17	<1	<1	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	<1	<1	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	11	11	---
Calcium	ppm	ASTM D5185m	142	135	---
Phosphorus	ppm	ASTM D5185m	885	861	---
Zinc	ppm	ASTM D5185m	1167	1137	---
Sulfur	ppm	ASTM D5185m	14583	14218	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	2	---
Sodium	ppm	ASTM D5185m	3	3	---
Potassium	ppm	ASTM D5185m >20	<1	<1	---
Water	%	ASTM D6304 >0.2	0.013	0.010	---
ppm Water	ppm	ASTM D6304 >2000	135.8	102.2	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 15564	▲ 16579	---
Particles >6µm	ASTM D7647	>2500	355	501	---
Particles >14µm	ASTM D7647	>160	22	27	---
Particles >21µm	ASTM D7647	>40	4	5	---
Particles >38µm	ASTM D7647	>10	1	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/14	▲ 21/16/12	▲ 21/16/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.019	1.099	---




OIL ANALYSIS REPORT

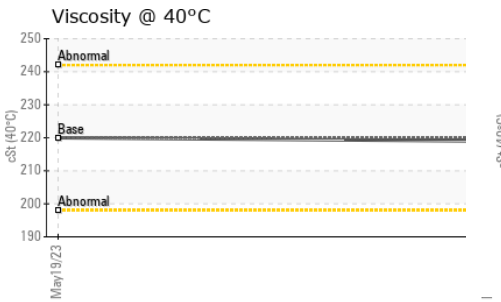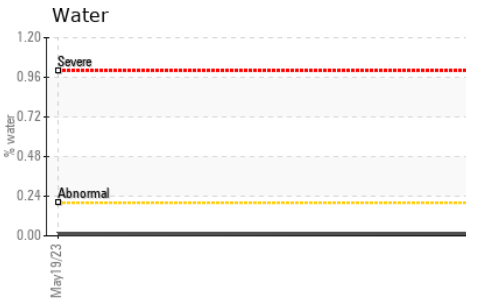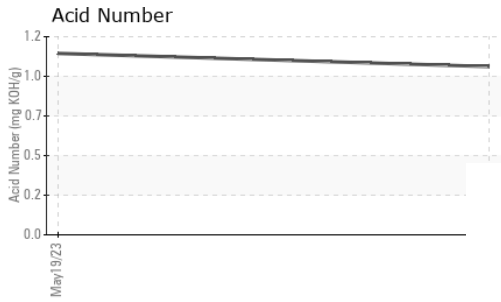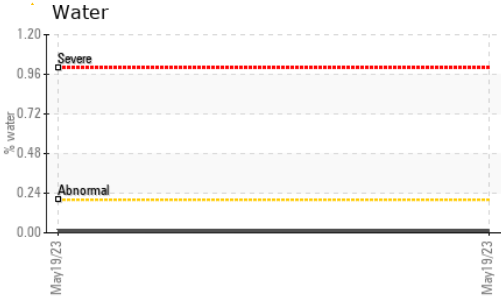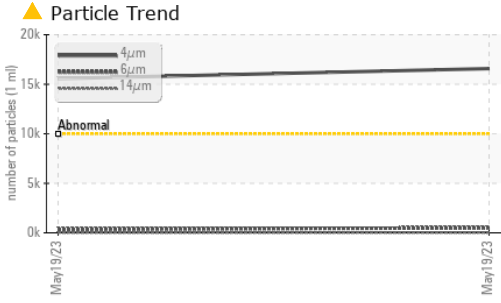





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	219	220

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

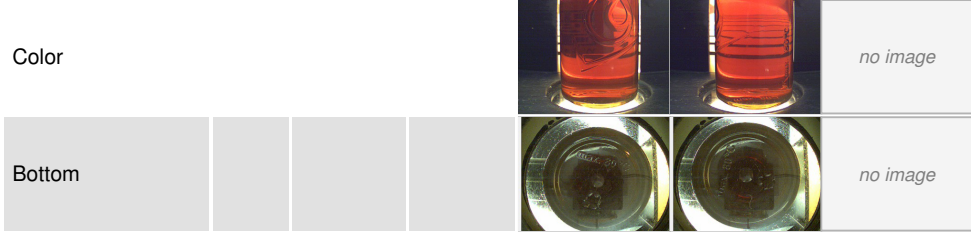

GRAPHS

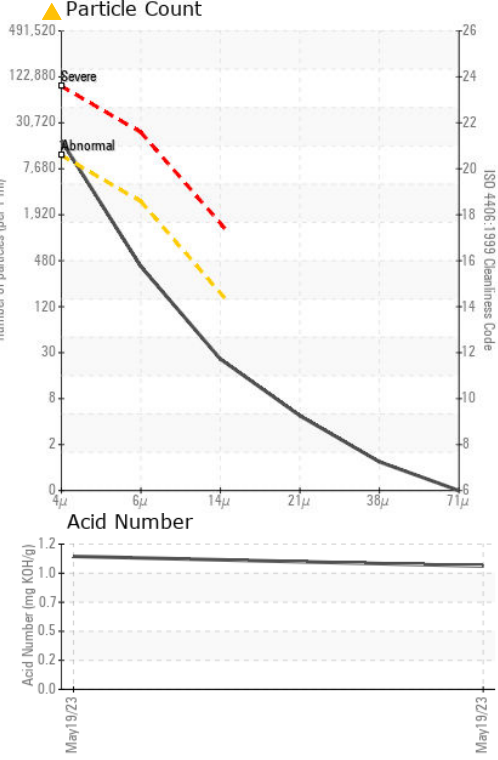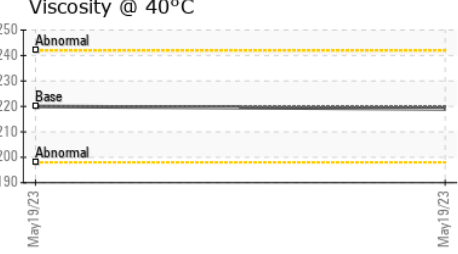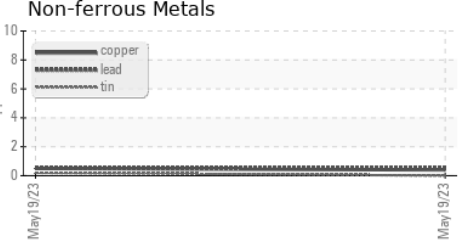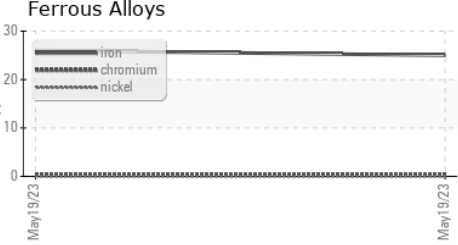

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0776579 **Received** : 26 May 2023
Lab Number : 05858554 **Diagnosed** : 31 May 2023
Unique Number : 10493019 **Diagnostician** : Doug Bogart
Test Package : PLANT

CASCADES CONTAINERBOARD PACKAGING - BEARPACK PROJECT
 10026 OLD RIDGE ROAD
 ASHLAND, VA
 US 23005
 Contact: MARC-ANDRE HUBERT
 marc-andre_hubert@cascades.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)