


PROBLEM SUMMARY

Sample Rating Trend




WEAR

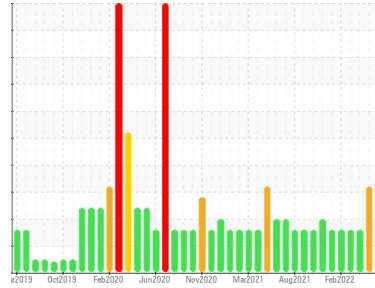


Area
CRM64
 Machine Id
CRM 64 DIRTY OIL TANK (S/N 16-2300-1025)
 Component
Tank New (Unused) Oil
 Fluid
NOT GIVEN (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

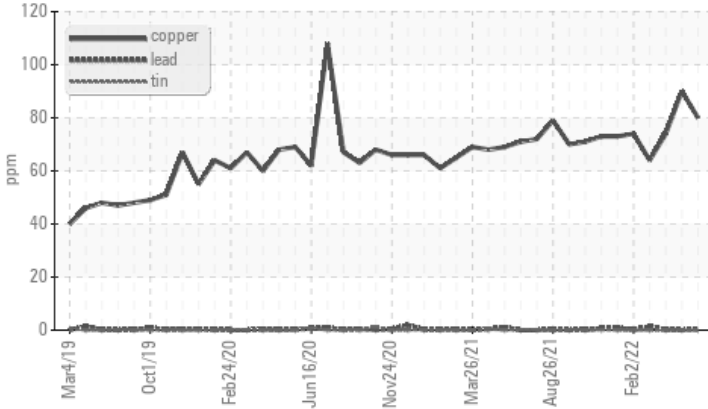

▲ Ferrous Alloys

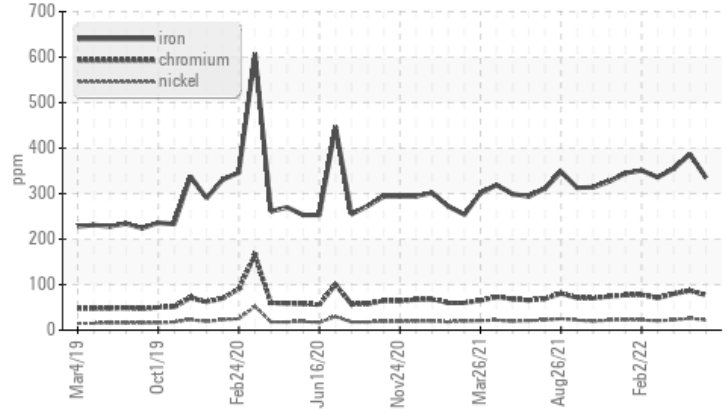

RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	ATTENTION	ATTENTION
Iron	ppm	ASTM D5185m	>5	▲ 335	▲ 387	▲ 355
Chromium	ppm	ASTM D5185m	>5	▲ 77	▲ 87	▲ 80
Nickel	ppm	ASTM D5185m	>5	▲ 22	▲ 26	22
Copper	ppm	ASTM D5185m	>5	▲ 80	▲ 90	74

Customer Id: OUTCALAL
 Sample No.: RP0035053
 Lab Number: 05861129
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	MISSED	Jul 06 2023	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

28 Apr 2023 Diag: Jonathan Hester

WEAR



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Bearing and/or gear wear is indicated. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Apr 2022 Diag: Jonathan Hester

WEAR



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Bearing and/or gear wear is indicated. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



01 Mar 2022 Diag: Jonathan Hester

WEAR



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Bearing and/or gear wear is indicated. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

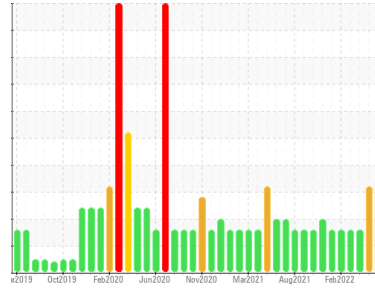

WEAR



Area
CRM64
 Machine Id
CRM 64 DIRTY OIL TANK (S/N 16-2300-1025)
 Component
Tank New (Unused) Oil
 Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

Bearing and/or gear wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	RP0035053	RP0034554	RP0024694
Sample Date	Client Info	30 May 2023	28 Apr 2023	06 Apr 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	ATTENTION	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	12	13	15
Iron	ppm	ASTM D5185m >5 ▲ 335	▲ 387	▲ 355
Chromium	ppm	ASTM D5185m >5 ▲ 77	▲ 87	▲ 80
Nickel	ppm	ASTM D5185m >5 ▲ 22	▲ 26	22
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m >5 0	0	0
Aluminum	ppm	ASTM D5185m >5 0	<1	<1
Lead	ppm	ASTM D5185m >5 <1	0	<1
Copper	ppm	ASTM D5185m >5 ▲ 80	▲ 90	74
Tin	ppm	ASTM D5185m >5 0	0	0
Antimony	ppm	ASTM D5185m	---	---
Vanadium	ppm	ASTM D5185m	<1	<1
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0
Barium	ppm	ASTM D5185m	0	0
Molybdenum	ppm	ASTM D5185m	2	2
Manganese	ppm	ASTM D5185m	17	19
Magnesium	ppm	ASTM D5185m	<1	0
Calcium	ppm	ASTM D5185m	9	12
Phosphorus	ppm	ASTM D5185m	1031	1130
Zinc	ppm	ASTM D5185m	43	35






CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15 2	3	3
Sodium	ppm	ASTM D5185m	<1	1
Potassium	ppm	ASTM D5185m >20 1	0	1
Water	%	ASTM D6304	0.007	0.006
ppm Water	ppm	ASTM D6304	78.8	68.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.178	0.22

OIL ANALYSIS REPORT

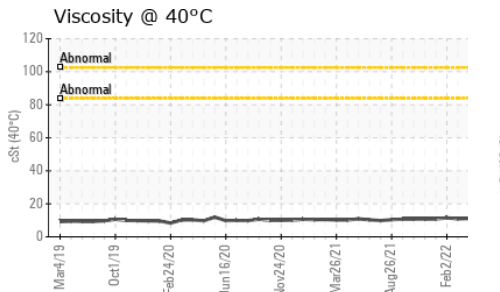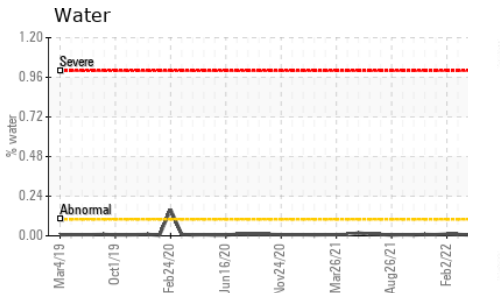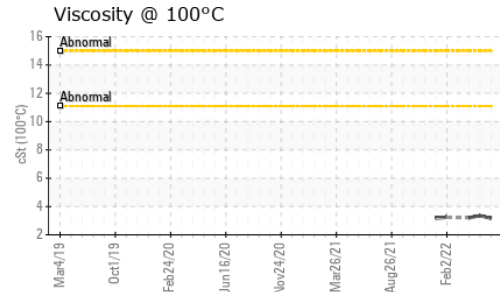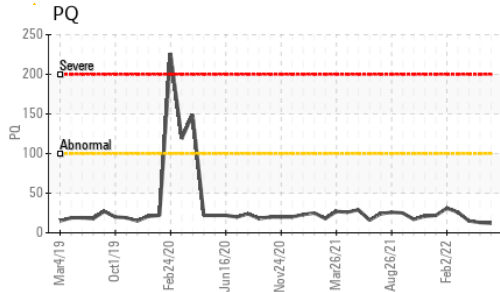
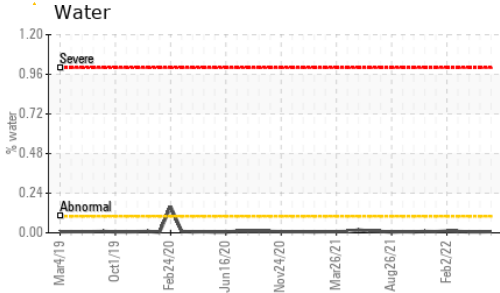


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG





FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	11.8	12.1	11.1
Visc @ 100°C	cSt	ASTM D445	3.16	3.35	3.21
Viscosity Index (VI)	Scale	ASTM D2270	136	159	168

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color

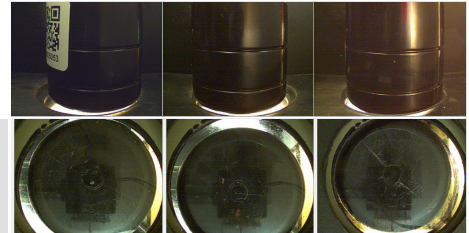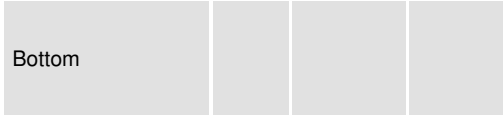

GRAPHS

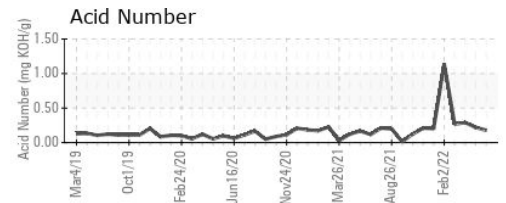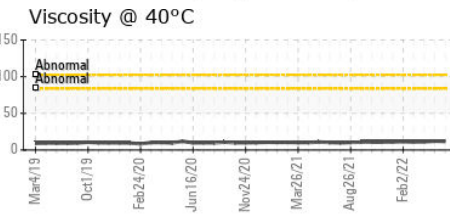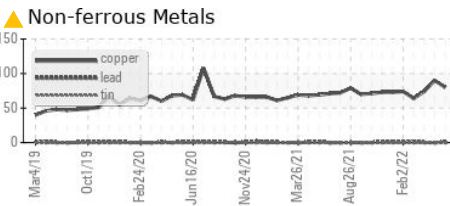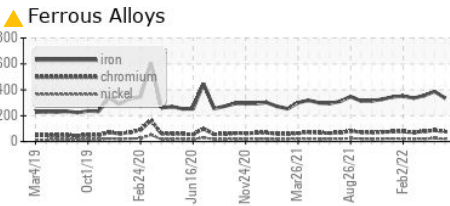

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0035053 **Received** : 31 May 2023
Lab Number : 05861129 **Diagnosed** : 02 Jun 2023
Unique Number : 10495594 **Diagnostician** : Jonathan Hester

OUTOKUMPU STAINLESS USA
 HWY 43 N
 CALVERT, AL
 US 36513
 Contact: MARIO JOHNSON
 Mario.johnson@outokumpu.com
 T: (251)321-4105
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)