



PROBLEM SUMMARY

Sample Rating Trend



ISO




Machine Id
300-1

Component
Hydraulic System

Fluid
CHEVRON HYDRAULIC OIL AW ISO 46 (100 GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

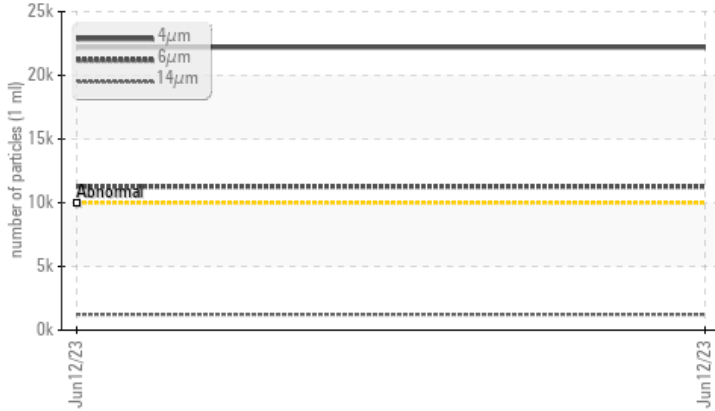

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Particles >4µm	ASTM D7647	>10000	▲ 22207	---	---	---
Particles >6µm	ASTM D7647	>2500	▲ 11274	---	---	---
Particles >14µm	ASTM D7647	>320	▲ 1230	---	---	---
Particles >21µm	ASTM D7647	>80	▲ 256	---	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 22/21/17	---	---	---

PrtFilter



Customer Id: PARMET
Sample No.: PH0001065
Lab Number: 05876715
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
300-1

Component
Hydraulic System

Fluid
CHEVRON HYDRAULIC OIL AW ISO 46 (100 GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PH0001065	---	---
Sample Date	Client Info		12 Jun 2023	---	---
Machine Age	mths	Client Info	0	---	---
Oil Age	mths	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	---	---
Chromium	ppm	ASTM D5185m >20	0	---	---
Nickel	ppm	ASTM D5185m >20	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	0	---	---
Lead	ppm	ASTM D5185m >20	<1	---	---
Copper	ppm	ASTM D5185m >20	16	---	---
Tin	ppm	ASTM D5185m >20	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---


ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	1	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m	9	---	---
Calcium	ppm	ASTM D5185m	104	---	---
Phosphorus	ppm	ASTM D5185m	354	---	---
Zinc	ppm	ASTM D5185m	459	---	---
Sulfur	ppm	ASTM D5185m	3800	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	0	---	---
Sodium	ppm	ASTM D5185m	0	---	---
Potassium	ppm	ASTM D5185m >20	1	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 22207	---	---
Particles >6µm	ASTM D7647	>2500	▲ 11274	---	---
Particles >14µm	ASTM D7647	>320	▲ 1230	---	---
Particles >21µm	ASTM D7647	>80	▲ 256	---	---
Particles >38µm	ASTM D7647	>20	7	---	---
Particles >71µm	ASTM D7647	>4	0	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 22/21/17	---	---





FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.43	---	---

Particle Filter (Magn: 200 x)

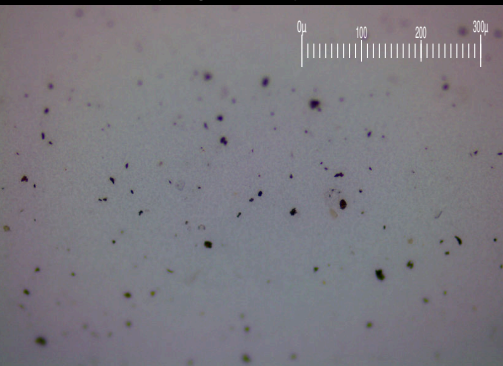



OIL ANALYSIS REPORT


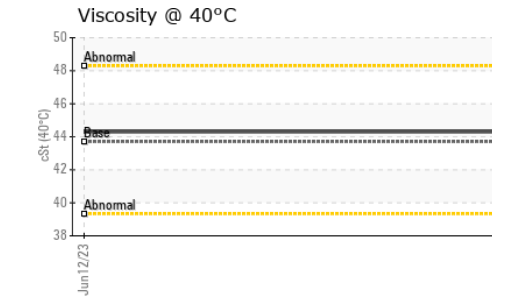
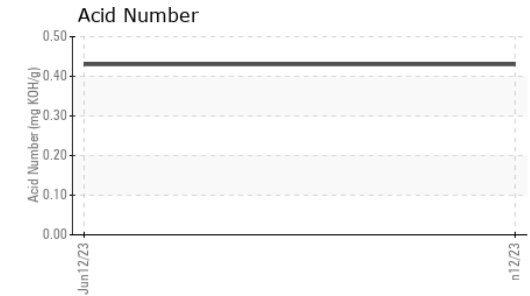
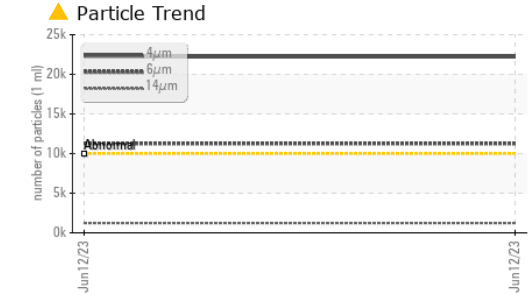
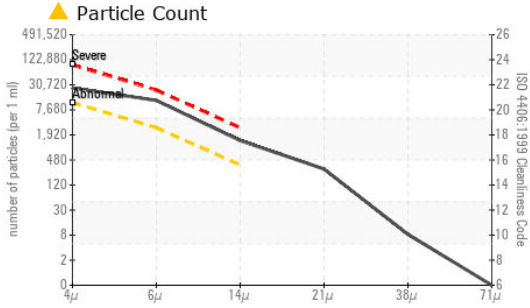


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	43.7	44.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

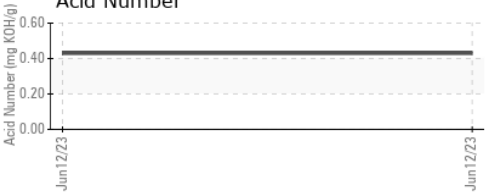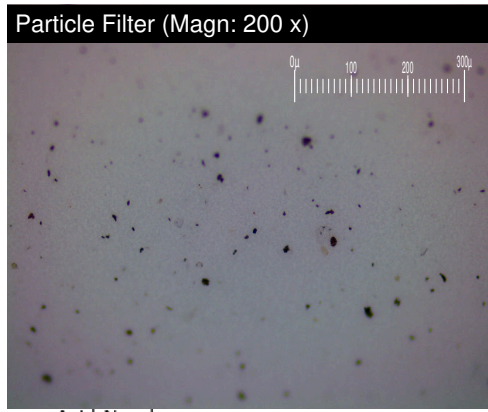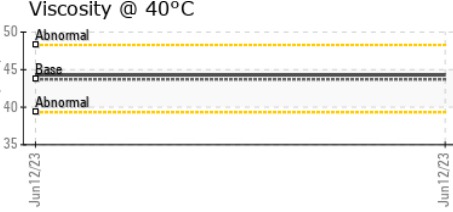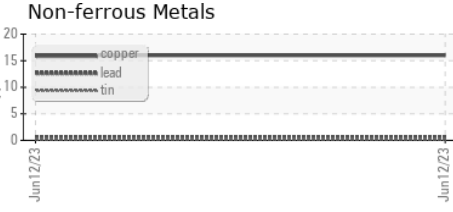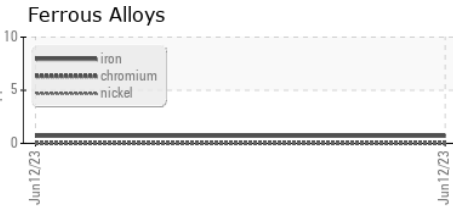

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0001065 **Received** : 19 Jun 2023
Lab Number : 05876715 **Diagnosed** : 20 Jun 2023
Unique Number : 10521818 **Diagnostician** : Jonathan Hester
Test Package : PLANT (Additional Tests: KF, PrtFilter)

PARKER HANNIFIN CORPORATION-OIL LAB
 501 MADISON AVENUE
 CARY, NC
 US 27513
 Contact: JAY GRONBACH
 jay.gronbach@parker.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)