




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
OKLAHOMA/3
Machine Id
39.63 [OKLAHOMA^3]
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

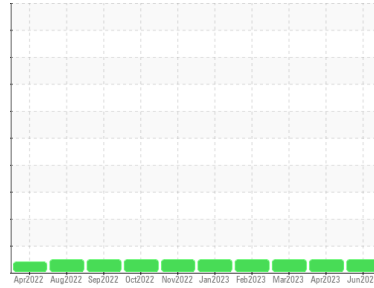

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		WC0821719	WC0808013	WC0792550
Sample Date	Client Info		13 Jun 2023	28 Apr 2023	24 Mar 2023
Machine Age	hrs	Client Info	3299	2795	2600
Oil Age	hrs	Client Info	2600	2600	2110
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	27	9	21
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	<1	0	1
Lead	ppm	ASTM D5185m >40	1	<1	<1
Copper	ppm	ASTM D5185m >330	4	2	7
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	22	33	28
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	41	42	41
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m 0	532	515	490
Calcium	ppm	ASTM D5185m	1839	1683	1609
Phosphorus	ppm	ASTM D5185m	794	773	698
Zinc	ppm	ASTM D5185m	972	935	887
Sulfur	ppm	ASTM D5185m	3043	3115	2449

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	4	4	4
Sodium	ppm	ASTM D5185m	4	4	3
Potassium	ppm	ASTM D5185m >20	0	2	0

INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	0.4	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	11.0	7.7	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.7	22.3	23.2

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	22.3	21.1	22.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	8.9	10.0	8.9







OIL ANALYSIS REPORT

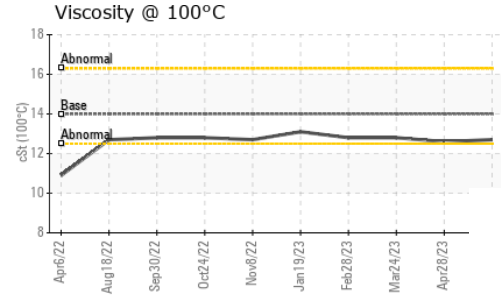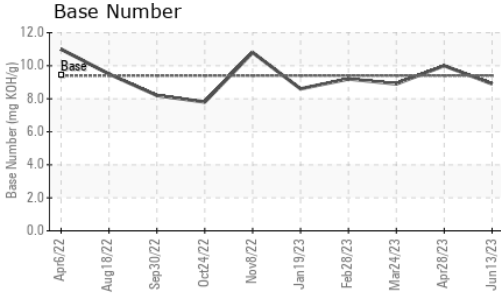

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	14	12.7	12.6

GRAPHS

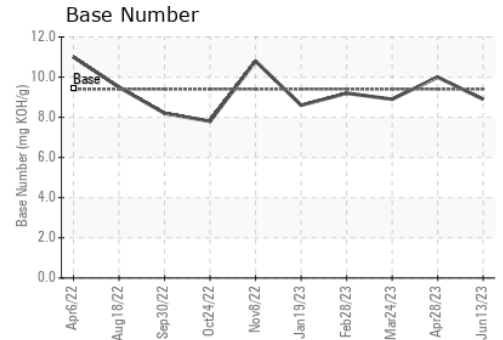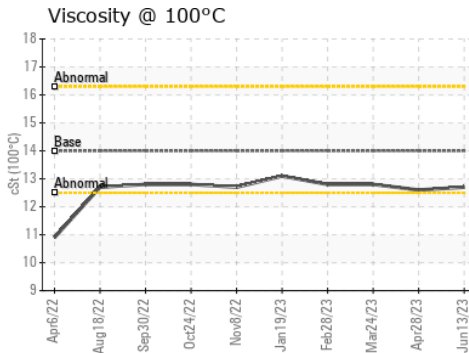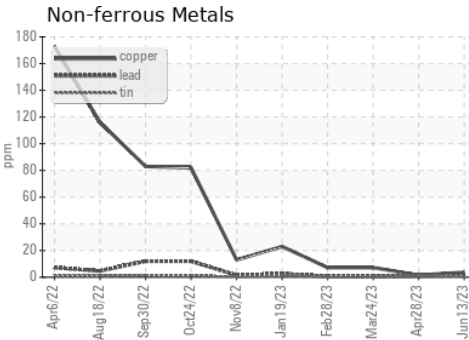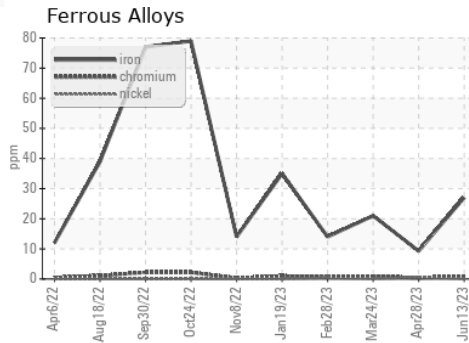

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0821719 Received : 21 Jun 2023
 Lab Number : 05879348 Diagnosed : 22 Jun 2023
 Unique Number : 10524451 Diagnostician : Wes Davis
 Test Package : CONST (Additional Tests: TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: SHAWN SOUTH
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:

F: x: