



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**BUCKET TRUCK**  
 Machine Id  
**FREIGHTLINER V031**  
 Component  
**Transmission (Auto)**  
 Fluid  
**MOBIL DELVAC SYNTHETIC ATF (5 GAL)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>HPL0001781</b>	---	---
Sample Date	Client Info		<b>11 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>6560</b>	---	---
Oil Age	hrs	Client Info	<b>1316</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >230	<b>49</b>	---	---
Chromium	ppm	ASTM D5185m >2	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >65	<b>11</b>	---	---
Lead	ppm	ASTM D5185m >55	<b>10</b>	---	---
Copper	ppm	ASTM D5185m >85	<b>29</b>	---	---
Tin	ppm	ASTM D5185m >5	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>121</b>	---	---
Barium	ppm	ASTM D5185m	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	<b>45</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>286</b>	---	---
Zinc	ppm	ASTM D5185m	<b>14</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>1096</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>2</b>	---	---
Sodium	ppm	ASTM D5185m	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---

## FLUID DEGRADATION



	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.38</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---











# OIL ANALYSIS REPORT

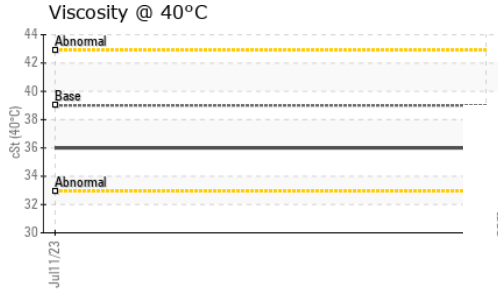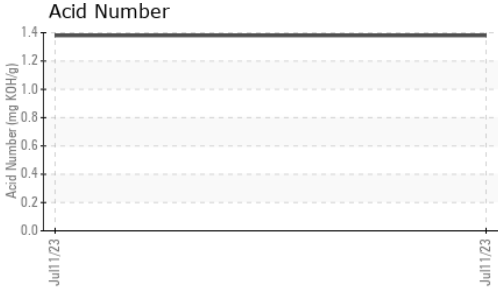

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 39	<b>36.0</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

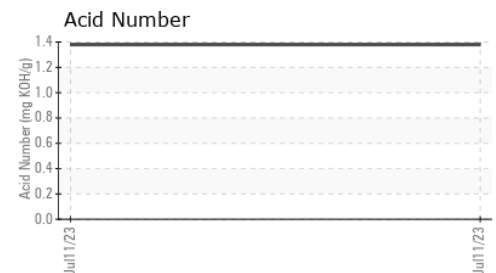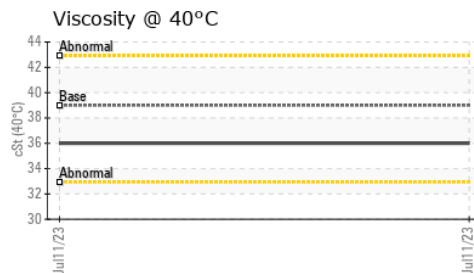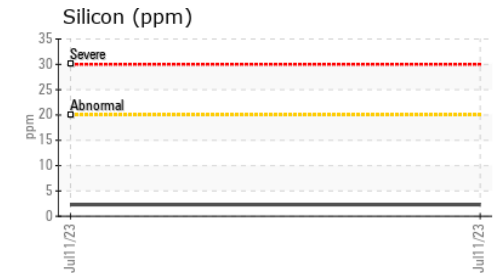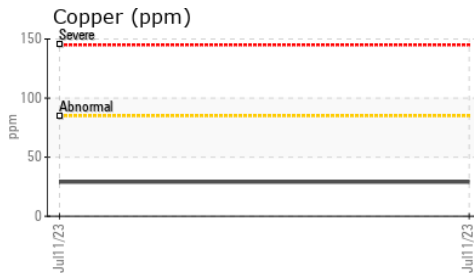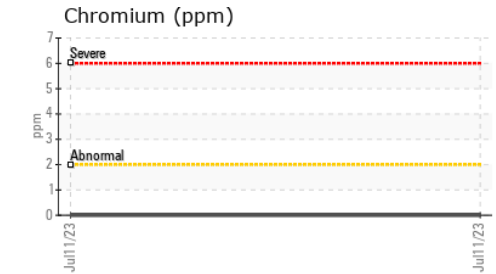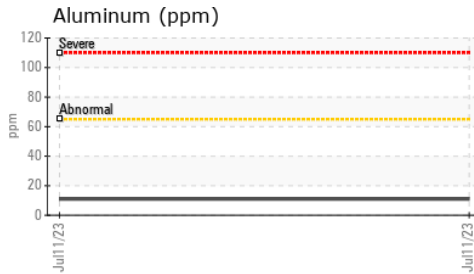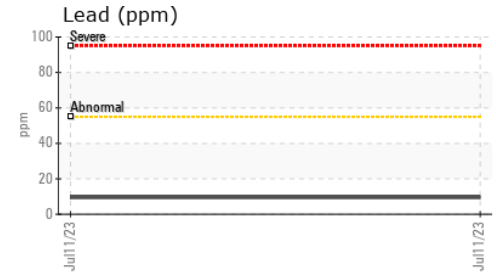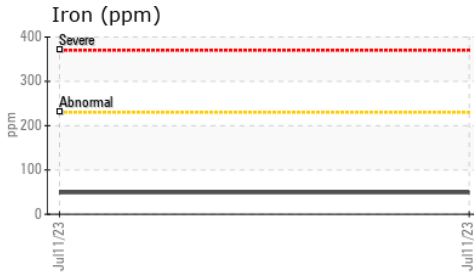

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0001781 **Received** : 14 Jul 2023  
**Lab Number** : **05898738** **Diagnosed** : 17 Jul 2023  
**Unique Number** : 10560094 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**MUSCATINE POWER AND WATER**  
 3205 CEDAR STREET  
 MUSCATINE, IA  
 US 52761  
 Contact: JONATHAN KLEIN  
 jonathan.klein@mpw.org  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)