


PROBLEM SUMMARY

[603954400 SDR] COLD WATER PUMP 1 (S/N 20075332)

Component Secondary Pump Fluid ISO 68 (--- GAL)

COMPONENT CONDITION SUMMARY

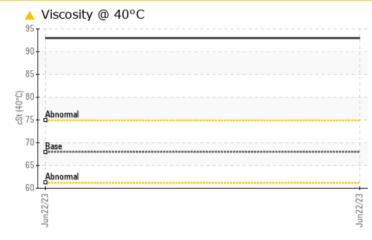

	RE	CON	MME	NDA	TIOI	N
--	----	-----	-----	-----	------	---

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status				ATTENTION			
Visc @ 40°C	cSt	ASTM D445	68.0	<u> </u>			


Customer Id: MARSCHI Sample No.: WC0605517 Lab Number: 05901409 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

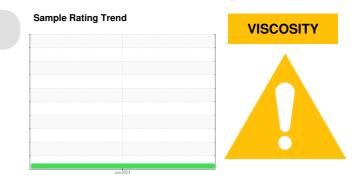

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Area [603954400 SDR] Machine Id COLD WATER PUMP 1 (S/N 20075332) Component

Secondary Pump Fluid ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ISO 100 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.




SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0605517		
Sample Date		Client Info		22 Jun 2023		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	2		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>7	1		
Lead	ppm	ASTM D5185m	>12	0		
Copper	ppm	ASTM D5185m	>30	0		
Tin	ppm	ASTM D5185m	>9	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		13		
Zinc	ppm	ASTM D5185m		4		
Sulfur	ppm	ASTM D5185m		675		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon						
Sodium	ppm	ASTM D5185m ASTM D5185m	>60	4		
Potassium	ppm		>20	-		
	ppm		-	<1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.088		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual		NEG		
Free Water	scalar	*Visual		NEG		
				O · · · //	TONK TO	

Contact/Location: TONY FIORE - MARSCHI



OIL ANALYSIS REPORT

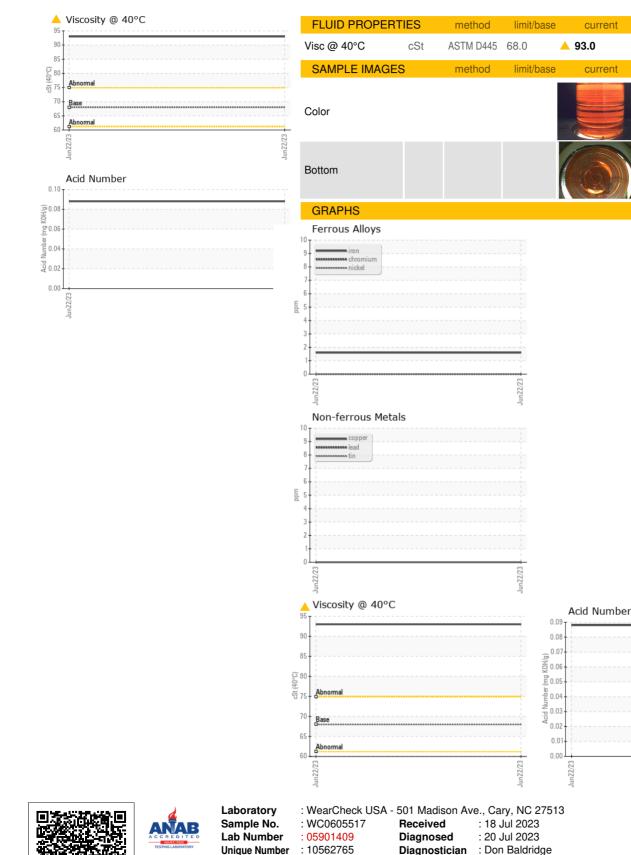

MARS CHOCOLATE 2019 NORTH OAK PARK CHICAGO, IL US 60707 Contact: TONY FIORE tony.fiore@effem.com T: (773)745-2279 F:

Certificate L2367

Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Contact/Location: TONY FIORE - MARSCHI

history1

history1

no image

no image

history2

history2

no image

no image