




OIL ANALYSIS REPORT

Sample Rating Trend

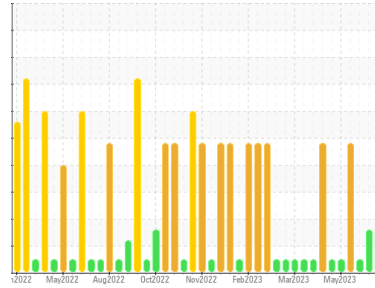

DIRT



Machine Id
Brent Run CAT 4 BRRM04BE
 Component
Biogas Engine
 Fluid
CHEVRON HDAX 6500 LFG GAS ENGINE OIL (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 800 hour sample. Oil filters changed at time of oil sample)

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0776809	WC0776860	WC0776802
Sample Date	Client Info		14 Jul 2023	05 Jul 2023	14 Jun 2023
Machine Age	hrs	Client Info	101836	101700	101200
Oil Age	hrs	Client Info	814	678	178
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>15	3	2	2
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>6	4	2	1
Lead	ppm	ASTM D5185m	>9	<1	0	0
Copper	ppm	ASTM D5185m	>6	1	1	<1
Tin	ppm	ASTM D5185m	>4	4	4	2
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	1	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		9	12	9
Calcium	ppm	ASTM D5185m		1914	1744	1860
Phosphorus	ppm	ASTM D5185m		275	259	264
Zinc	ppm	ASTM D5185m		350	317	323
Sulfur	ppm	ASTM D5185m		3015	2945	2876

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>181	▲ 190	▲ 189	98
Sodium	ppm	ASTM D5185m		0	1	<1
Potassium	ppm	ASTM D5185m	>20	2	0	1

INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.9	6.6	5.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	23.5	19.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	17.4	12.4
Acid Number (AN)	mg KOH/g	ASTM D8045	1.2	1.52	1.67	0.76
Base Number (BN)	mg KOH/g	ASTM D2896	4.5	4.32	4.24	3.97











OIL ANALYSIS REPORT

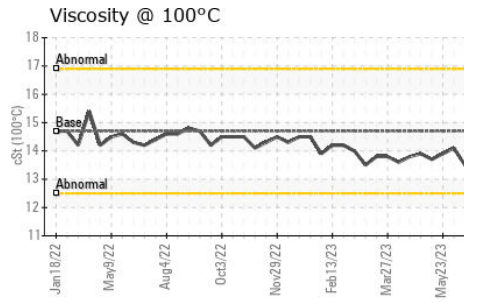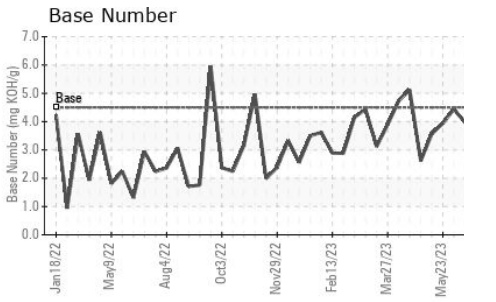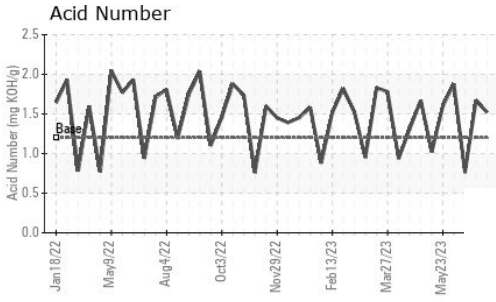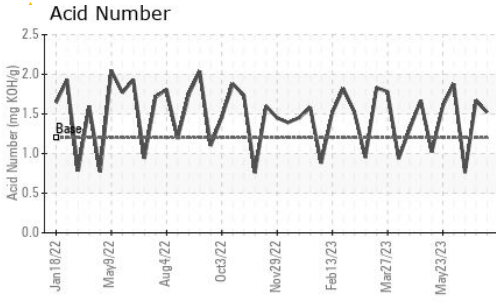

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	13.8	13.9

GRAPHS

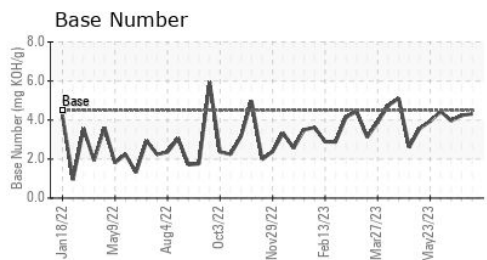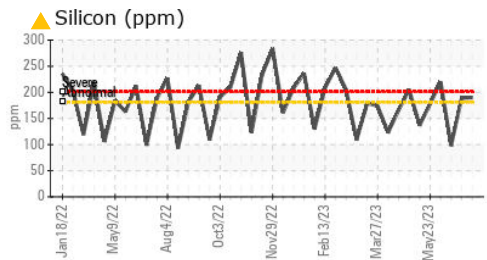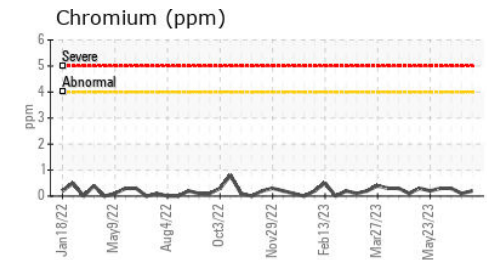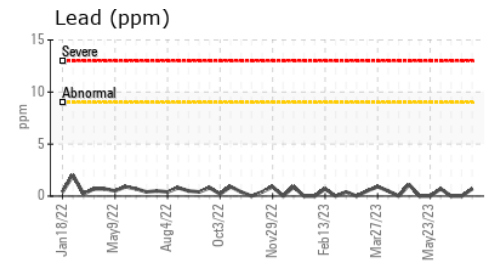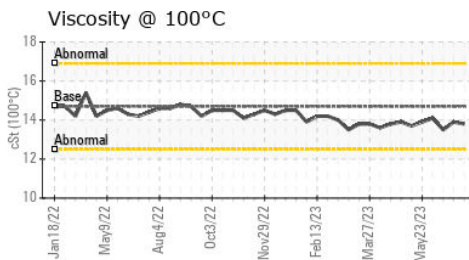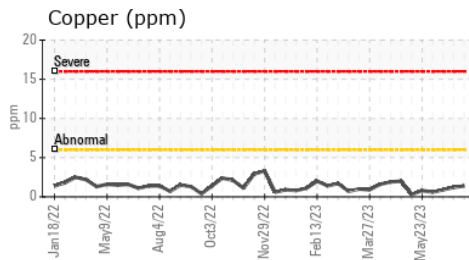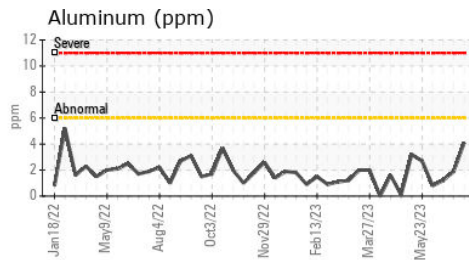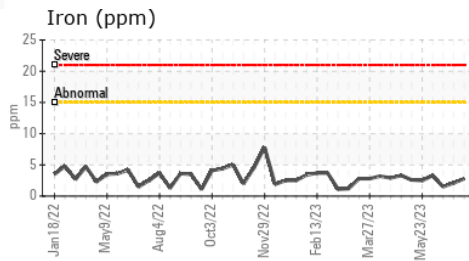

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0776809 **Received** : 18 Jul 2023
Lab Number : 05901452 **Diagnosed** : 20 Jul 2023
Unique Number : 10562808 **Diagnostician** : Sean Felton
Test Package : MOB 2

EDL NA Recips-Brent Run
 Brent Run Power Station, 8383 Vienna Road
 Montrose, MI
 US 48457-9141
 Contact: Jenna Hiltz
 Jenna.Hiltz@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)