




# OIL ANALYSIS REPORT

## Sample Rating Trend

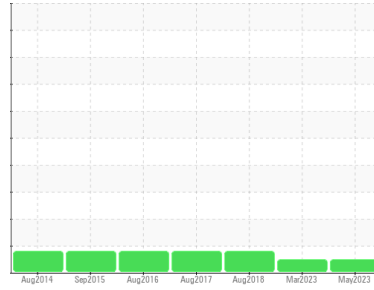

**NORMAL**



Machine Id  
**B740**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 46 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the fluid.

#### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0789667</b>	WC0778568	WC11107443
Sample Date	Client Info			<b>13 May 2023</b>	02 Mar 2023	31 Aug 2018
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>6</b>	4	3
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	4
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m	>20	<b>14</b>	2	▲ 24
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	2
Barium	ppm	ASTM D5185m	5	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	25	<b>&lt;1</b>	4	<1
Calcium	ppm	ASTM D5185m	200	<b>75</b>	48	34
Phosphorus	ppm	ASTM D5185m	300	<b>369</b>	345	245
Zinc	ppm	ASTM D5185m	370	<b>503</b>	418	240
Sulfur	ppm	ASTM D5185m	2500	<b>2729</b>	742	906

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>1</b>	0	1
Sodium	ppm	ASTM D5185m		<b>0</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG




# OIL ANALYSIS REPORT



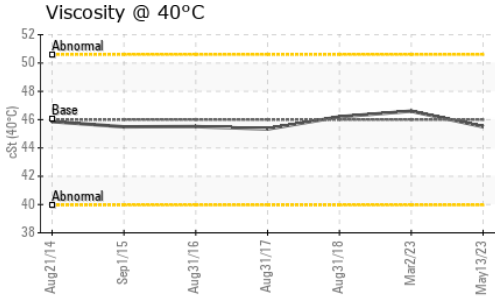


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	<b>45.5</b>	46.6	46.2

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

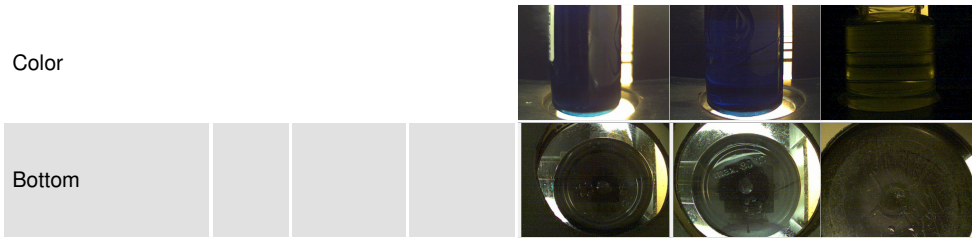

## GRAPHS

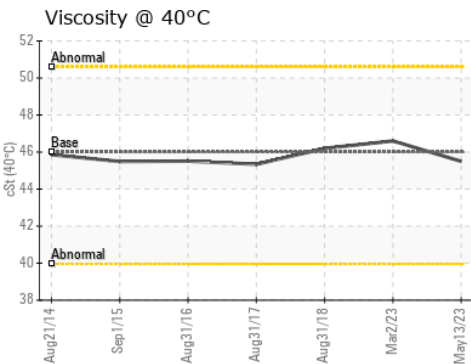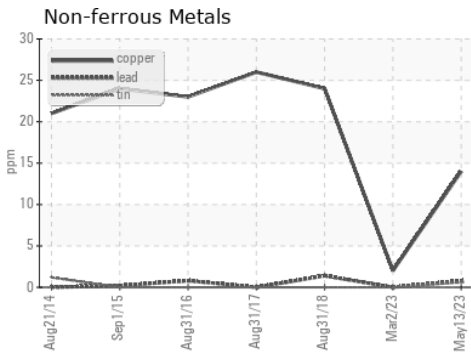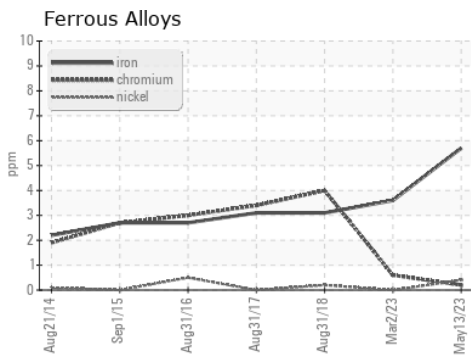

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0789667 **Received** : 11 Aug 2023  
**Lab Number** : **05922587** **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10602534 **Diagnostician** : Don Baldrige  
**Test Package** : IND 1

**SUMIRIKO TENNESSEE INC**  
 150 HESTER LN  
 TAZEWELL, TN  
 US 37879  
 Contact: JEREMY COLLINS  
 jcollins@us.sumiriko.com  
 T: (423)626-8805  
 F: (423)626-2065

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)