



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**[20567321]**

Machine Id  
**ROYAL PURPLE SYNFLIM 100**

Component  
**New (Unused) Oil**

Fluid  
**ROYAL PURPLE SYNFLIM 100 (--- GAL)**



## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0842613</b>	---	---
Sample Date	Client Info			<b>09 Aug 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	90	<b>78</b>	---	---
Calcium	ppm	ASTM D5185m		<b>2</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>3</b>	---	---
Zinc	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>21169</b>	---	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	<b>0.39</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual		<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---







# OIL ANALYSIS REPORT

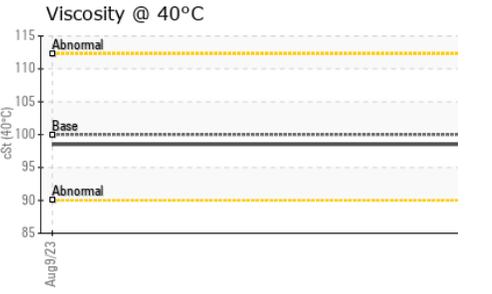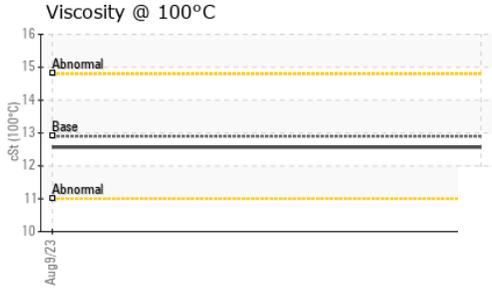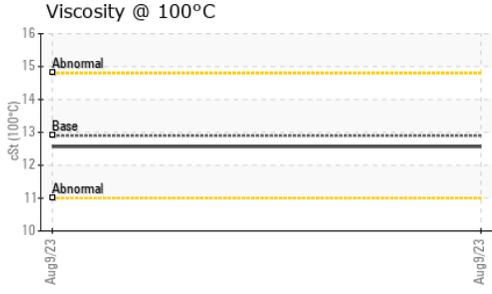

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 100	<b>98.52</b>	---	---
Visc @ 100°C	cSt	ASTM D445 12.9	<b>12.57</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270 124	<b>121</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

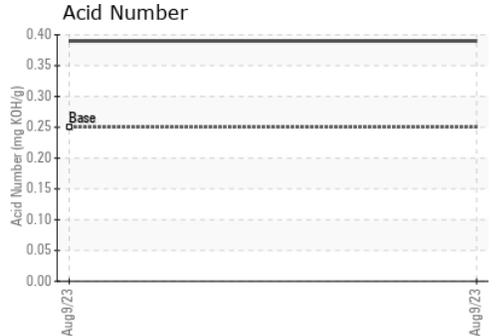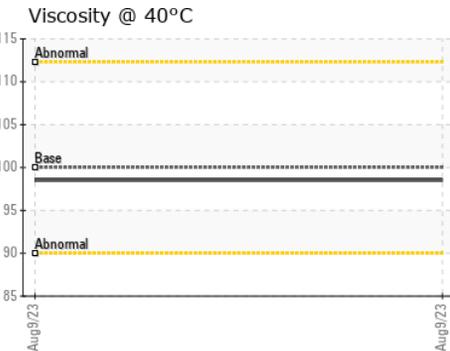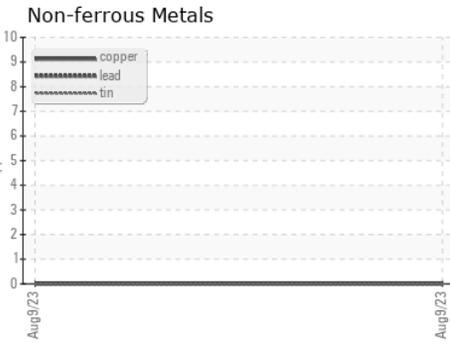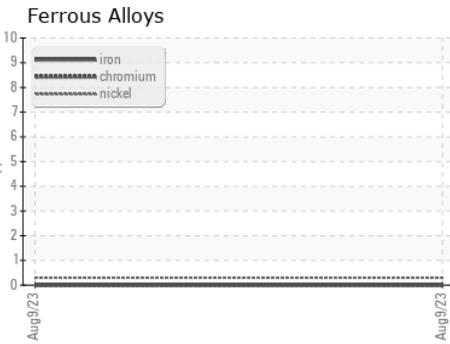

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0842613 **Received** : 11 Aug 2023  
**Lab Number** : **05922972** **Diagnosed** : 15 Aug 2023  
**Unique Number** : 10602919 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KV100, PrtCount, VI )

**PATHEON API**  
 6173 East Old Marion Highway, Bldg. 806  
 Florence, SC  
 US 29506  
 Contact: BARRY OLIVER  
 Calvin.Oliver@Roche.com  
 T: (843)629-4577  
 F: (843)629-4553

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)