




OIL ANALYSIS REPORT

Sample Rating Trend

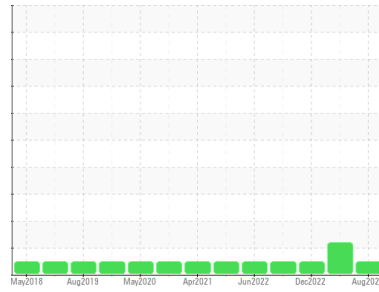

NORMAL



Area
CONSTRUCTORS, INC
 Machine Id
CHEVROLET GASOLINE 040646
 Component
Gasoline Engine
 Fluid
MOBIL 1 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0004743	SBP0003756	SBP0002290
Sample Date	Client Info		11 Aug 2023	28 Apr 2023	14 Dec 2022
Machine Age	hrs	Client Info	7192	6885	6551
Oil Age	hrs	Client Info	307	334	352
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>150	18	20	13
Chromium	ppm	ASTM D5185m	>20	<1	1	1
Nickel	ppm	ASTM D5185m	>5	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	3	6	3
Lead	ppm	ASTM D5185m	>50	0	0	1
Copper	ppm	ASTM D5185m	>155	11	12	15
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	94	37	39	50
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	67	71	66
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1388	535	531	513
Calcium	ppm	ASTM D5185m	820	1266	1281	1248
Phosphorus	ppm	ASTM D5185m	720	668	641	662
Zinc	ppm	ASTM D5185m	780	828	810	794
Sulfur	ppm	ASTM D5185m	2240	3275	3006	2691

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	9	8	12
Sodium	ppm	ASTM D5185m	>400	2	2	2
Potassium	ppm	ASTM D5185m	>20	2	4	2

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0.1	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	10.1	9.9	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	20.2	22.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3	16.7	16.3
Base Number (BN)	mg KOH/g	ASTM D2896		4.0	▲ 2.2	4.2







OIL ANALYSIS REPORT

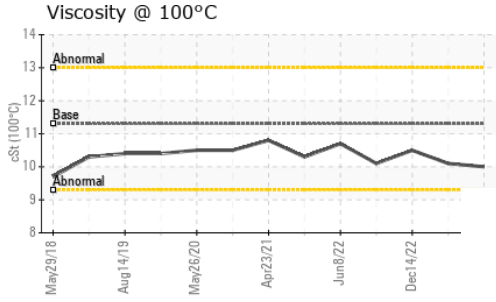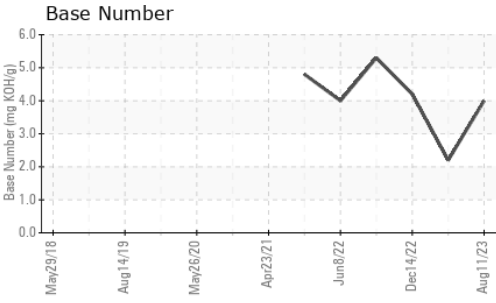

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.3	10.0	10.1	10.5

GRAPHS

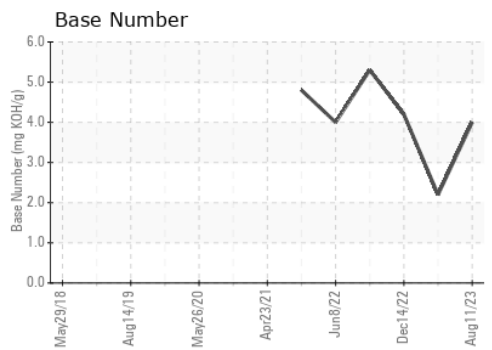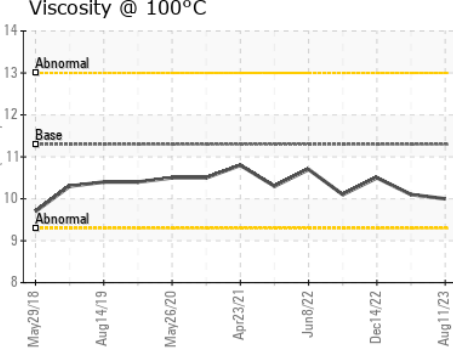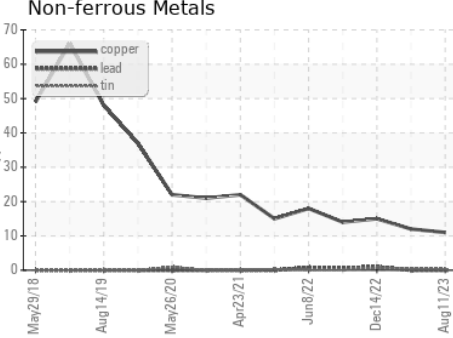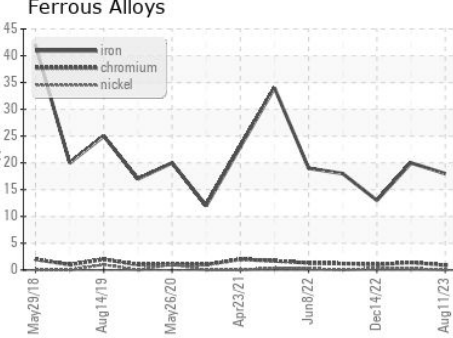

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0004743 **Received** : 14 Aug 2023
Lab Number : **05924020** **Diagnosed** : 15 Aug 2023
Unique Number : 10603967 **Diagnostician** : Sean Felton
Test Package : FLEET

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Jack Linhart
 jackl@constructorslincoln.com
 T: (402)434-2157
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)