

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id KAESER SFC 22 T 6576741 (Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


(S/N 1008	3)					
·	,					
			2020	Jan2021 Jul202		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004484	KCP28068	KCP10569
Sample Date		Client Info		26 Jul 2023	13 Jan 2021	26 Jun 2020
Machine Age	hrs	Client Info		21377	8148	4300
Dil Age	hrs	Client Info		0	3848	4300
Dil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	1	0
Fitanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	<1
ead	ppm	ASTM D5185m		0	<1	2
Copper	ppm	ASTM D5185m		8	2	10
Гin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
/anadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	12	2
Barium	ppm	ASTM D5185m	90	0	67	<1
Nolybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	3	83	17
Calcium	ppm	ASTM D5185m	0	1	<1	3
Phosphorus	ppm	ASTM D5185m	0	4	4	9
Zinc	ppm	ASTM D5185m	0	25	12	32
Sulfur	ppm	ASTM D5185m	23500	21096	19541	14299
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	25	9
Potassium	ppm	ASTM D5185m	>20	3	7	0
Nater	%	ASTM D6304	>0.05	0.005	0.019	0.015
opm Water	ppm	ASTM D6304	>500	52.7	191.2	150.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2472	11306	2435
Particles >6µm		ASTM D7647	>1300	784	4805	669
Particles >14µm		ASTM D7647	>80	42	3 06	29
Particles >21µm		ASTM D7647	>20	7	5 5	16
Particles >38µm		ASTM D7647	>4	1	2	13
Particles >71µm		ASTM D7647	>3	0	0	12
Dil Cleanliness		ISO 4406 (c)	>/17/13	18/17/13	▲ 19/15	17/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.55	0.311	0.313
56:18) Boy: 1				Contact/Locatio	on · Sonvice Mar	nager - HIGWAT


Report Id: HIGWAT [WUSCAR] 05926751 (Generated: 08/17/2023 14:56:18) Rev: 1


Contact/Location: Service Manager - HIGWAT



OIL ANALYSIS REPORT

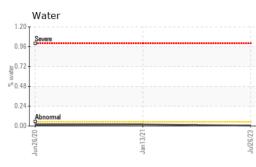



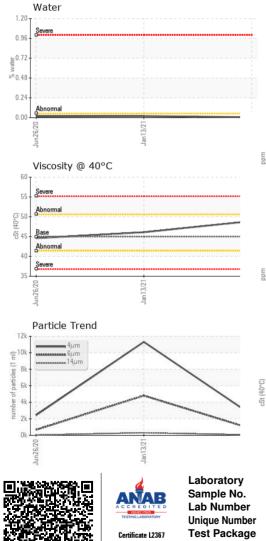

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.9	46.1	44.6
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						

