




OIL ANALYSIS REPORT

Sample Rating Trend

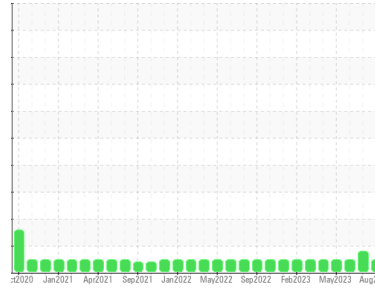

NORMAL



Machine Id
HUSKY 1

Component
Hydraulic System

Fluid
FIRE-RESISTANT FLUID ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PTK0004742	PTK0004777	PTK0004117
Sample Date	Client Info			20 Aug 2023	24 Jul 2023	14 Jun 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	8	7	13
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	2	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	5	0	<1	0
Calcium	ppm	ASTM D5185m	50	0	<1	0
Phosphorus	ppm	ASTM D5185m	175	117	122	89
Zinc	ppm	ASTM D5185m	62	12	20	43
Sulfur	ppm	ASTM D5185m	500	86	61	208

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	3	4
Sodium	ppm	ASTM D5185m		<1	0	1
Potassium	ppm	ASTM D5185m	>20	0	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8808	30653	292
Particles >6µm		ASTM D7647	>2500	1289	▲ 5615	88
Particles >14µm		ASTM D7647	>320	40	148	12
Particles >21µm		ASTM D7647	>80	9	29	3
Particles >38µm		ASTM D7647	>20	1	1	0
Particles >71µm		ASTM D7647	>4	1	1	0
Oil Cleanliness		ISO 4406 (c)	>--/18/15	20/17/12	▲ 22/20/14	15/14/11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	3.63	0.49	0.54	0.45


OIL ANALYSIS REPORT

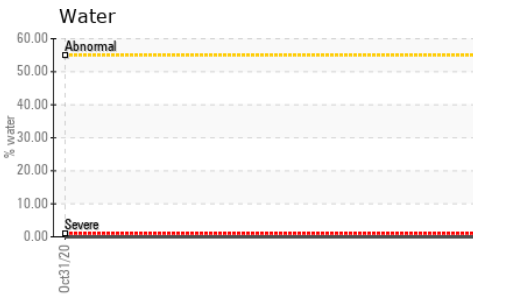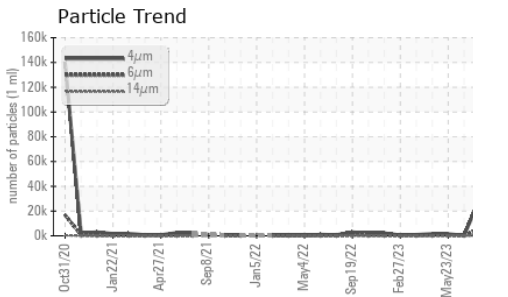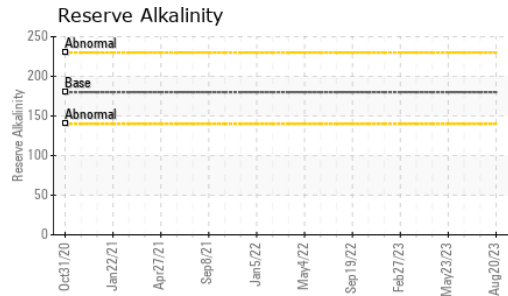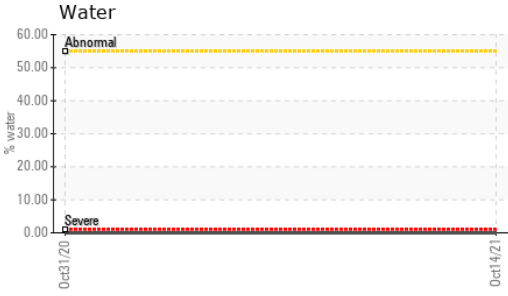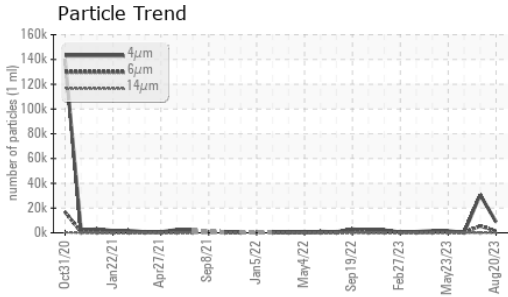






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.1	46.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

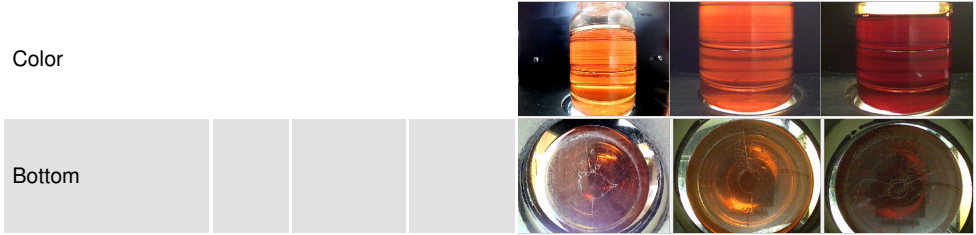

GRAPHS

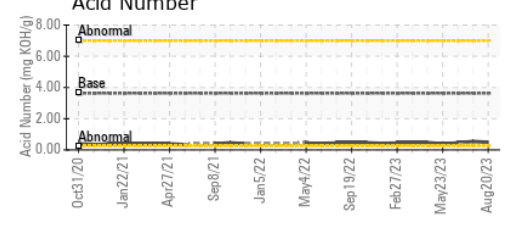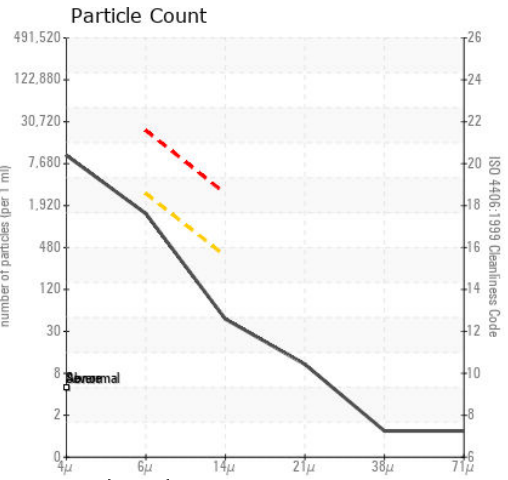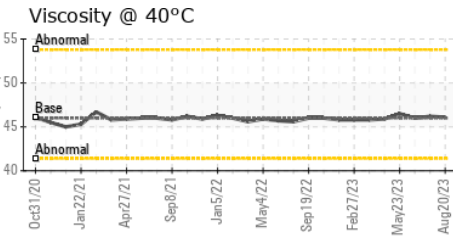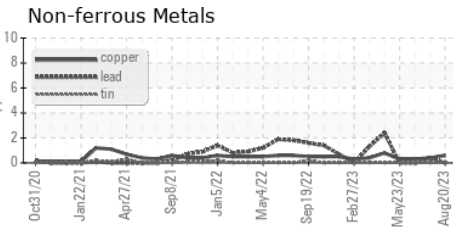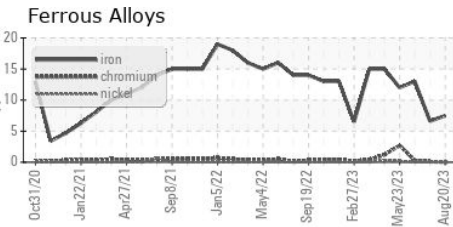

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0004742 **Received** : 21 Aug 2023
Lab Number : 05929551 **Diagnosed** : 22 Aug 2023
Unique Number : 10609498 **Diagnostician** : Angela Borella
Test Package : MOB 2 (Additional Tests: KF, pH, ReserveAlk)

NIAGARA WATER BOTTLING - MISSOURI CITY
 14810 FAIRWAY PINES DR
 MISSOURI CITY, TX
 US 77489
 Contact: MIKE CONLEE
 mconlee@niagarawater.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)