



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area

**Ewing Hauling**  
Machine Id  
**KENWORTH 1306**

Component

**Diesel Engine**

Fluid

**GIBRALTAR 15W/40 SUPER S-3 LX (11)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0831119</b>	---	---
Sample Date	Client Info			<b>11 Aug 2023</b>	---	---
Machine Age	hrs	Client Info		<b>10607</b>	---	---
Oil Age	hrs	Client Info		<b>150</b>	---	---
Oil Changed	Client Info			<b>Filtered</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>4</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>14</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	660	<b>65</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	1000	<b>812</b>	---	---
Calcium	ppm	ASTM D5185m	1050	<b>1312</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1043</b>	---	---
Zinc	ppm	ASTM D5185m	1270	<b>1238</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3913</b>	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m		<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.7</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>8.3</b>	---	---







# OIL ANALYSIS REPORT

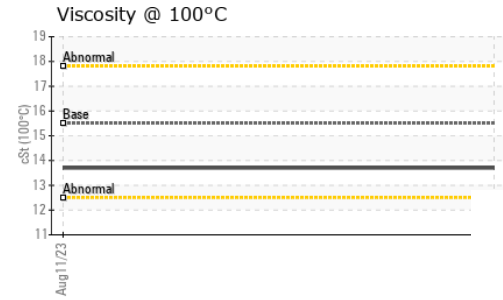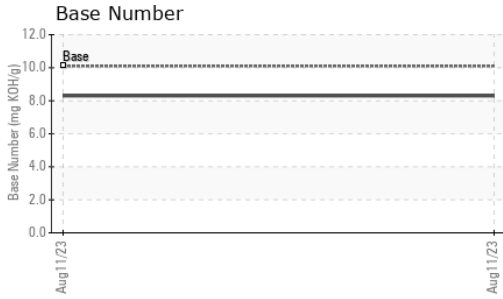

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	13.7	---

## GRAPHS

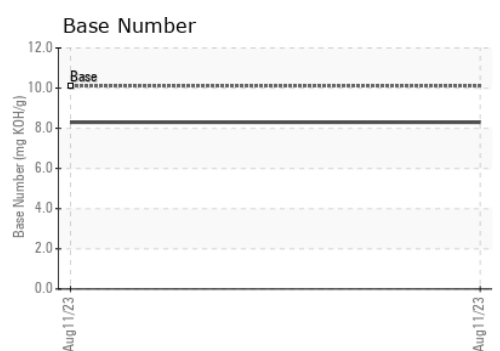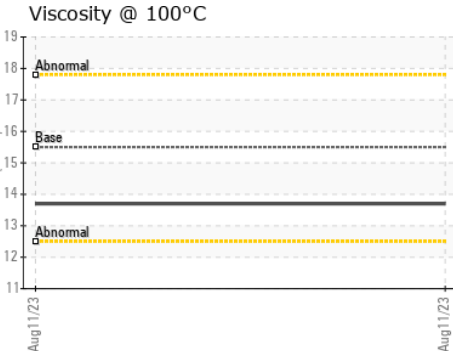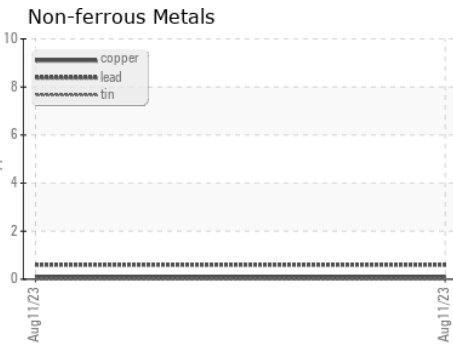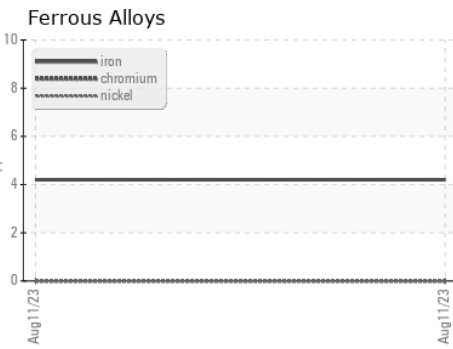

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0831119 **Received** : 22 Aug 2023  
**Lab Number** : 05931437 **Diagnosed** : 23 Aug 2023  
**Unique Number** : 10616708 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**INTERSTATE WASTE-EWING**  
 432 STOKES AVENUE  
 EWING TOWNSHIP, NJ  
 US 08638  
 Contact: Carlos Evans  
 CEvans@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: