




# PROBLEM SUMMARY

Sample Rating Trend

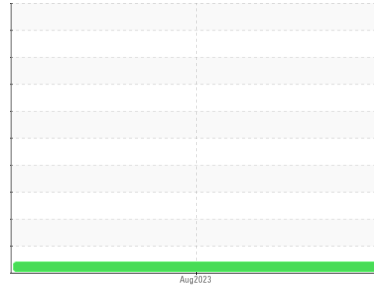


## VISCOSITY



Machine Id  
**INTERNATIONAL 3HSDWT2R0PN100689**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (40 QTS)**

### COMPONENT CONDITION SUMMARY

#### ▲ Viscosity @ 100°C

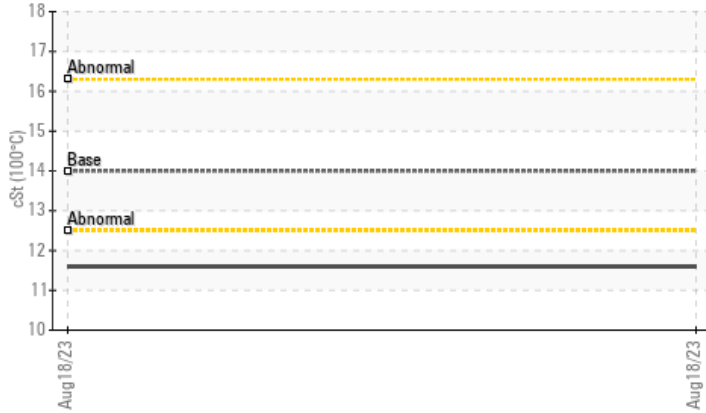

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

Sample Status	ATTENTION		---	---		
Visc @ 100°C	cSt	ASTM D445	14	▲ 11.6	---	---

Customer Id: IDESAG  
 Sample No.: ILMFA52371  
 Lab Number: 05931865  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

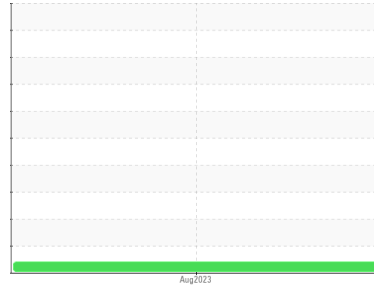

VISCOSITY



Machine Id  
**INTERNATIONAL 3HSDWT2R0PN100689**

Component  
**Diesel Engine**

Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (40 QTS)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>ILMFA52371</b>	---	---
Sample Date	Client Info		<b>18 Aug 2023</b>	---	---
Machine Age	mls	Client Info	<b>20409</b>	---	---
Oil Age	mls	Client Info	<b>480</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>40</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>43</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>18</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>78</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 0	<b>62</b>	---	---
Manganese	ppm	ASTM D5185m	<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m 0	<b>413</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1824</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1022</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1231</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>3627</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>17</b>	---	---
Sodium	ppm	ASTM D5185m	<b>7</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>142</b>	---	---
Fuel	%	ASTM D3524 >2.0	<b>0.4</b>	---	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>8.3</b>	---	---








# OIL ANALYSIS REPORT

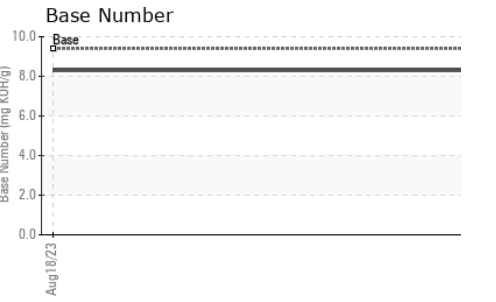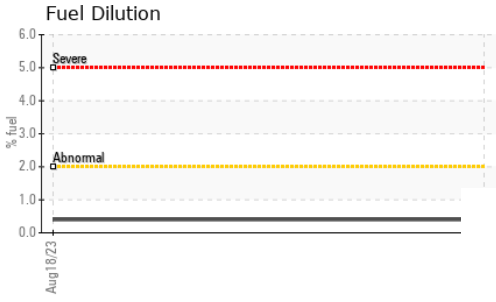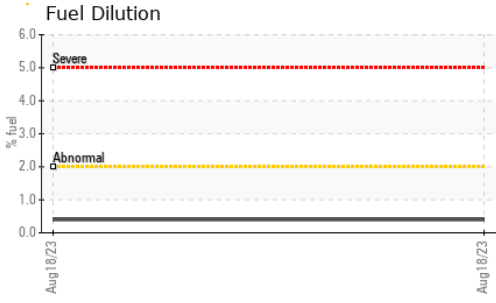

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	▲ 11.6	---	---

### GRAPHS

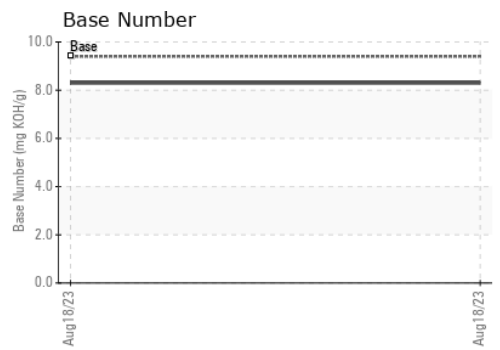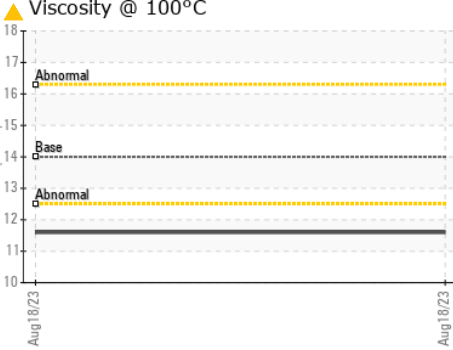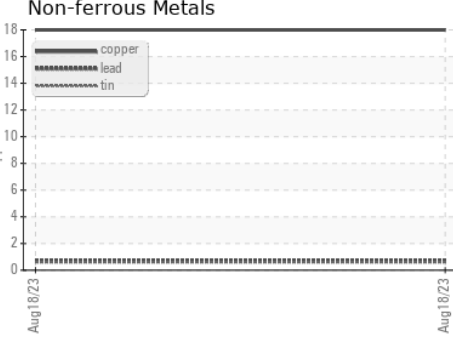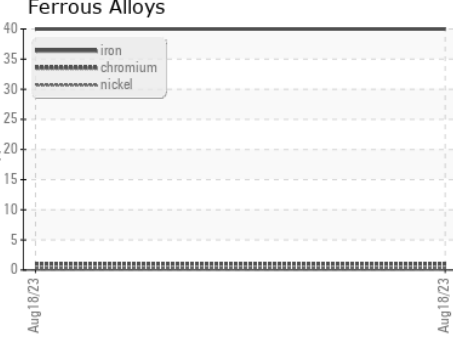

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ILMFA52371 **Received** : 23 Aug 2023  
**Lab Number** : 05931865 **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10617136 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**WIELAND IDEALEASE**  
 430 MIDLAND RD.  
 BAY CITY, MI  
 US 45601  
 Contact: BILL FLETCHER  
 billfletcher@wielandtrucks.com  
 T:  
 F: (989)790-7911

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)