




PROBLEM SUMMARY


Sample Rating Trend

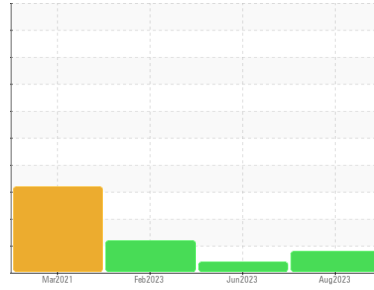

Machine Id
B21613 - 4 (S/N 69700019)
 Component
Gearbox
 Fluid
JAX MAGNA-PLATE 85W140-FG (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

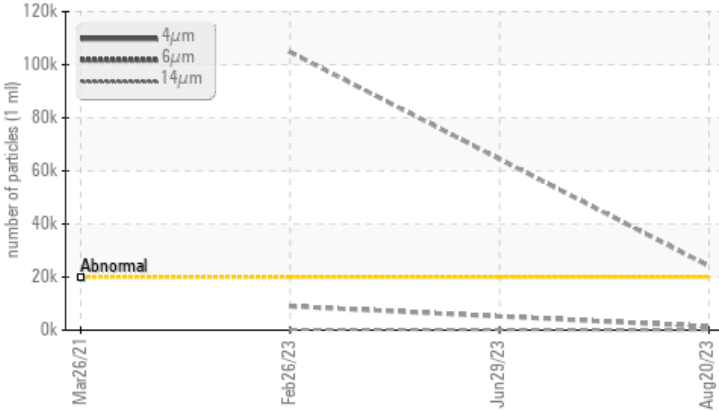

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ATTENTION	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647 >20000	▲ 24137	---	▲ 104784
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 22/18/13	---	▲ 24/20/15

Customer Id: HORBEL
 Sample No.: WC0820484
 Lab Number: 05938230
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

29 Jun 2023 Diag: Don Baldrige

VIS DEBRIS



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



26 Feb 2023 Diag: Don Baldrige

ISO



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



26 Mar 2021 Diag: Jonathan Hester

WEAR



We recommend you service the filters on this component if applicable. We recommend an early resample to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample. Bearing and/or bushing wear is indicated. Appearance is milky. There is a moderate amount of visible silt present in the sample. The AN level is acceptable for this fluid.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

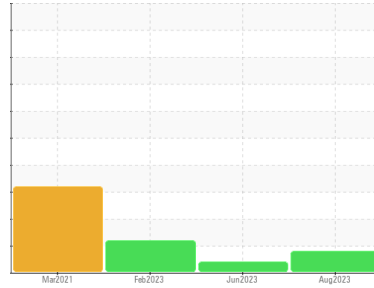

ISO



Machine Id
B21613 - 4 (S/N 69700019)
 Component
Gearbox
 Fluid
JAX MAGNA-PLATE 85W140-FG (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0820484	WC0799730	WC0732488
Sample Date	Client Info	20 Aug 2023	29 Jun 2023	26 Feb 2023
Machine Age	yrs Client Info	0	0	0
Oil Age	yrs Client Info	0	1	0
Oil Changed	Client Info	N/A	Not Changd	N/A
Sample Status		ATTENTION	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	<1	<1	1
Chromium	ppm ASTM D5185m >15	0	0	<1
Nickel	ppm ASTM D5185m >15	0	0	2
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >25	0	<1	<1
Lead	ppm ASTM D5185m >100	0	0	0
Copper	ppm ASTM D5185m >200	33	31	79
Tin	ppm ASTM D5185m >25	<1	2	6
Antimony	ppm ASTM D5185m >5	---	---	---
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	0	<1
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	0	0	0
Manganese	ppm ASTM D5185m	<1	<1	0
Magnesium	ppm ASTM D5185m	<1	1	0
Calcium	ppm ASTM D5185m	0	0	0
Phosphorus	ppm ASTM D5185m	462	467	341
Zinc	ppm ASTM D5185m	0	0	0
Sulfur	ppm ASTM D5185m	6592	6274	3995

CONTAMINANTS





method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<1	<1	1
Sodium	ppm ASTM D5185m	0	0	0
Potassium	ppm ASTM D5185m >20	0	<1	<1

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	▲ 24137	---	▲ 104784
Particles >6µm	ASTM D7647 >5000	1386	---	▲ 8976
Particles >14µm	ASTM D7647 >640	55	---	275
Particles >21µm	ASTM D7647 >160	14	---	77
Particles >38µm	ASTM D7647 >40	1	---	5
Particles >71µm	ASTM D7647 >10	0	---	0
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 22/18/13	---	▲ 24/20/15

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.69	0.76	0.75

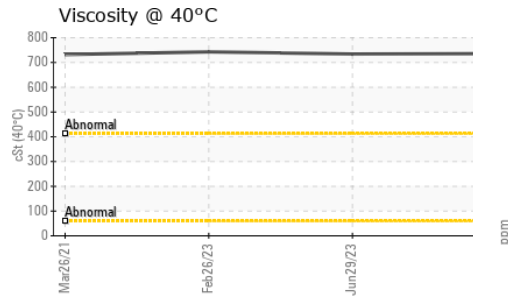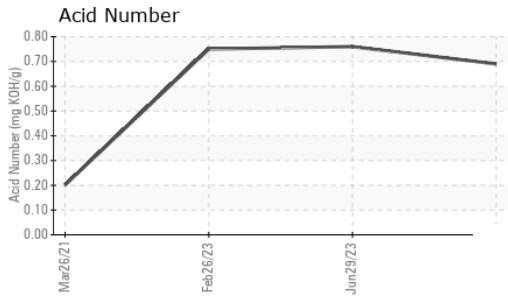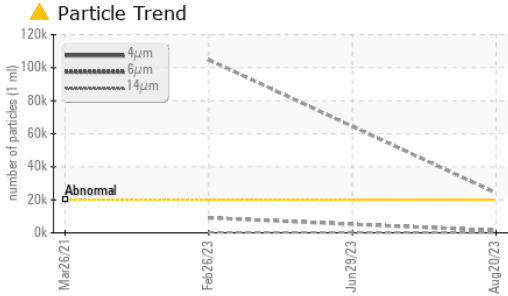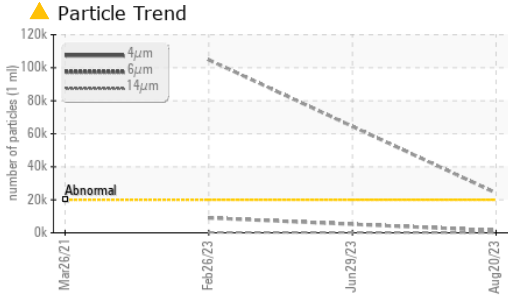






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	735.6	734	743

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

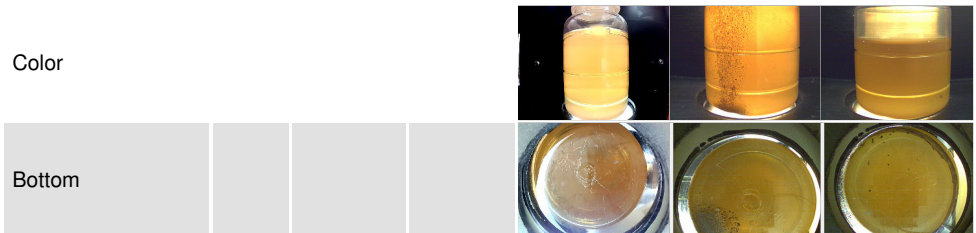

GRAPHS

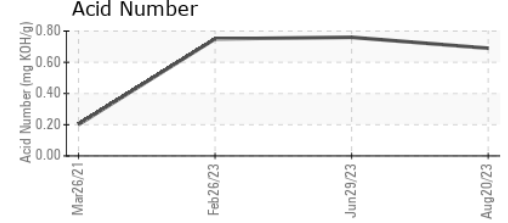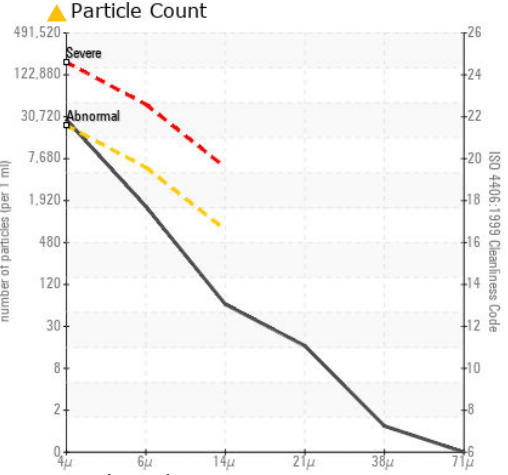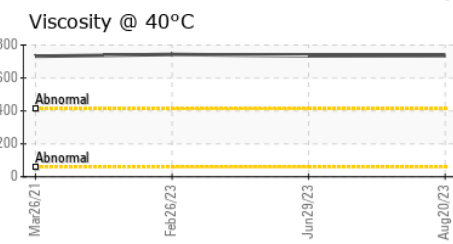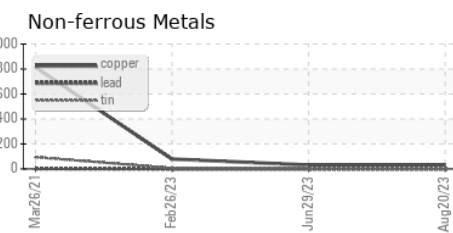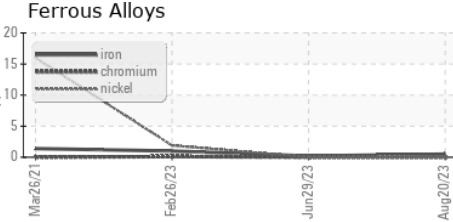

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0820484 **Received** : 30 Aug 2023
Lab Number : 05938230 **Diagnosed** : 01 Sep 2023
Unique Number : 10628842 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: PrtCount)

HORMEL FOODS-BELOIT
 3000 KENNEDY DRIVE
 BELOIT, WI
 US 53511
 Contact: Craig Bennett
 cabennett@hormel.com
 T:
 F: (608)365-8322

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)