



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[128876]
 Machine Id
100356.0 - 1012
 Component
Compressor
 Fluid
ACS-S460 (10 GAL)



DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0781037	---	---
Sample Date	Client Info		06 Sep 2023	---	---
Machine Age	hrs Client Info		103456	---	---
Oil Age	hrs Client Info		0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>50	3	---	---
Chromium	ppm ASTM D5185m	>10	0	---	---
Nickel	ppm ASTM D5185m	>3	7	---	---
Titanium	ppm ASTM D5185m	>3	0	---	---
Silver	ppm ASTM D5185m	>2	0	---	---
Aluminum	ppm ASTM D5185m	>10	3	---	---
Lead	ppm ASTM D5185m	>10	0	---	---
Copper	ppm ASTM D5185m	>50	5	---	---
Tin	ppm ASTM D5185m	>10	<1	---	---
Vanadium	ppm ASTM D5185m		0	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		0	---	---
Barium	ppm ASTM D5185m		0	---	---
Molybdenum	ppm ASTM D5185m		<1	---	---
Manganese	ppm ASTM D5185m		1	---	---
Magnesium	ppm ASTM D5185m		<1	---	---
Calcium	ppm ASTM D5185m		0	---	---
Phosphorus	ppm ASTM D5185m		331	---	---
Zinc	ppm ASTM D5185m		23	---	---
Sulfur	ppm ASTM D5185m		3187	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	2	---	---
Sodium	ppm ASTM D5185m		4	---	---
Potassium	ppm ASTM D5185m	>20	0	---	---

FLUID DEGRADATION



	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045		0.23	---	---

VISUAL



	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	---	---
Yellow Metal	scalar *Visual	NONE	NONE	---	---
Precipitate	scalar *Visual	NONE	NONE	---	---
Silt	scalar *Visual	NONE	NONE	---	---
Debris	scalar *Visual	NONE	NONE	---	---
Sand/Dirt	scalar *Visual	NONE	NONE	---	---
Appearance	scalar *Visual	NORML	NORML	---	---
Odor	scalar *Visual	NORML	NORML	---	---
Emulsified Water	scalar *Visual	>0.05	NEG	---	---
Free Water	scalar *Visual		NEG	---	---

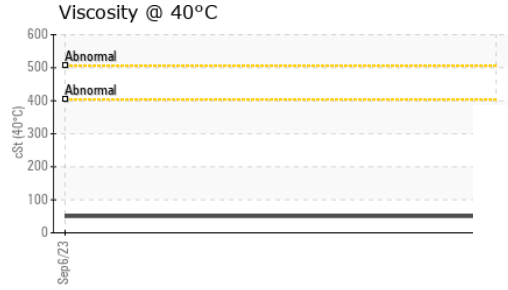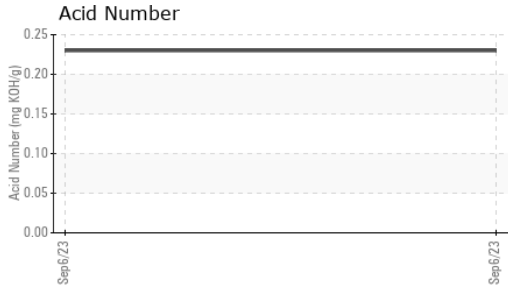





OIL ANALYSIS REPORT



FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	50.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

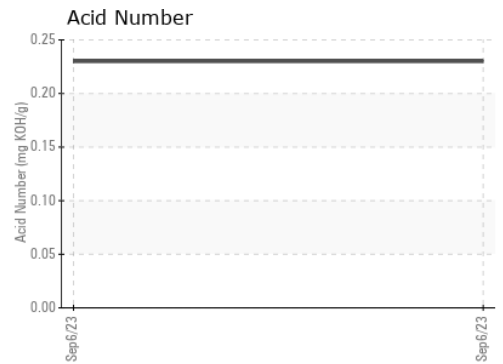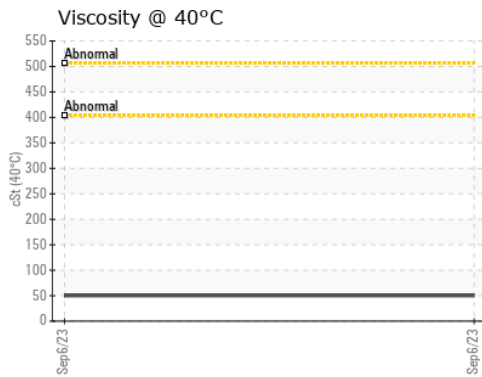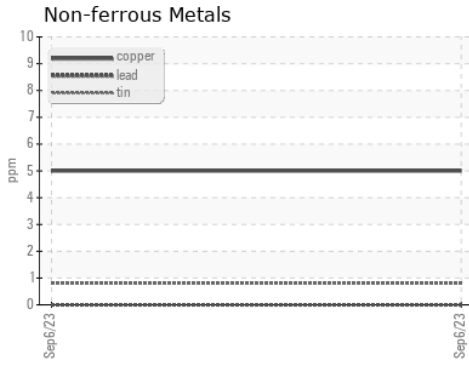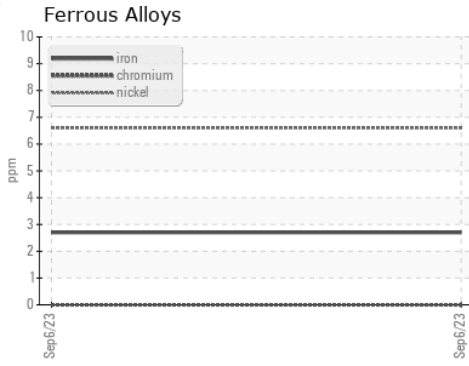

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0781037 **Received** : 25 Sep 2023
Lab Number : 05959930 **Diagnosed** : 26 Sep 2023
Unique Number : 10661143 **Diagnostician** : Doug Bogart
Test Package : IND 2

CASCO USA
 2022 FILMORE AVENUE
 ERIE, PA
 US 16506
 Contact: Phil Shaver
 pshaver@cascousa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: