




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

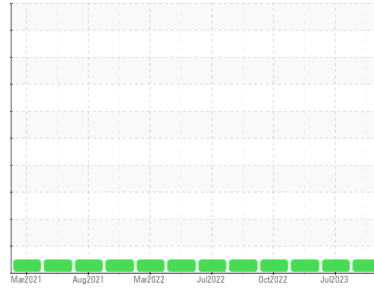

Machine Id  
**ALMEDA INJECTION PUMP 1 820PM18021**  
 Component  
**Natural Gas Engine**  
 Fluid  
**MOBIL PEGASUS 805 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RP0026939</b>	RP0026915	RP0026930
Sample Date	Client Info			<b>19 Sep 2023</b>	13 Jul 2023	07 Feb 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Filtered</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>74</b>	83	76
Chromium	ppm	ASTM D5185m	>4	<b>2</b>	2	3
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>7</b>	4	6
Lead	ppm	ASTM D5185m	>30	<b>7</b>	8	8
Copper	ppm	ASTM D5185m	>35	<b>11</b>	9	10
Tin	ppm	ASTM D5185m	>4	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	80	<b>4</b>	4	2
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>7</b>	7	7
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>44</b>	56	47
Calcium	ppm	ASTM D5185m	1020	<b>1018</b>	1015	1045
Phosphorus	ppm	ASTM D5185m	220	<b>309</b>	322	309
Zinc	ppm	ASTM D5185m	230	<b>330</b>	347	338

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	<b>6</b>	5	6
Sodium	ppm	ASTM D5185m		<b>7</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Water	%	ASTM D6304	>0.1	<b>---</b>	0.057	---
ppm Water	ppm	ASTM D6304	>1000	<b>---</b>	572.7	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	6.8	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.7</b>	16.4	16.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.0</b>	12.0	12.4
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.82</b>	1.09	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.4	<b>3.18</b>	4.01	4.93





# OIL ANALYSIS REPORT

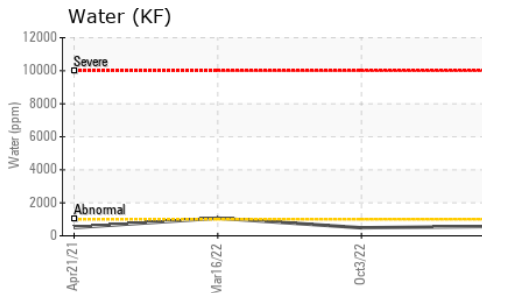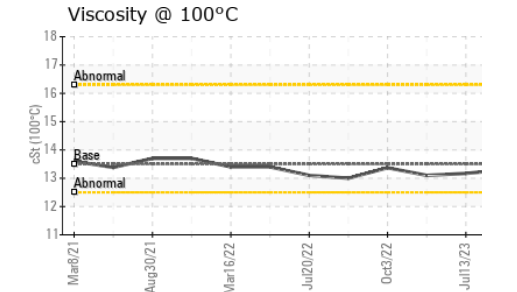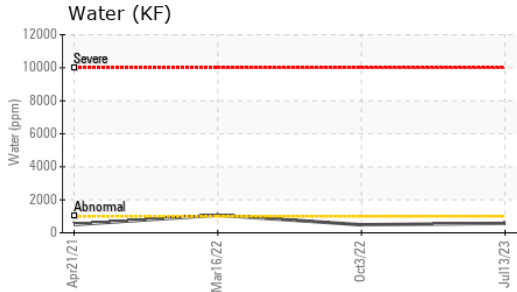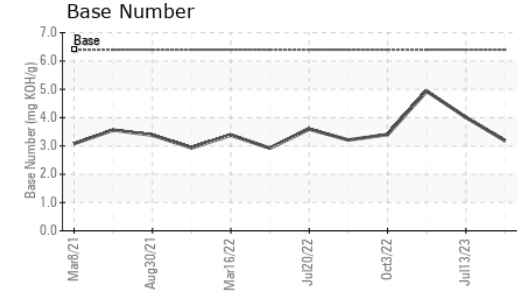

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.5	<b>13.3</b>	13.17

## GRAPHS

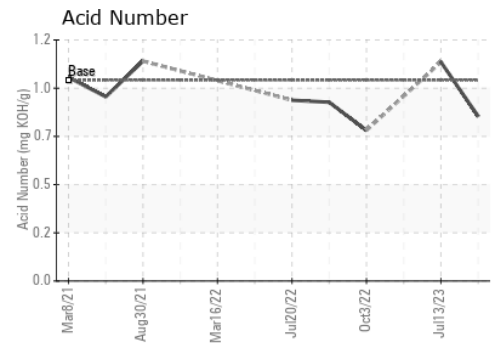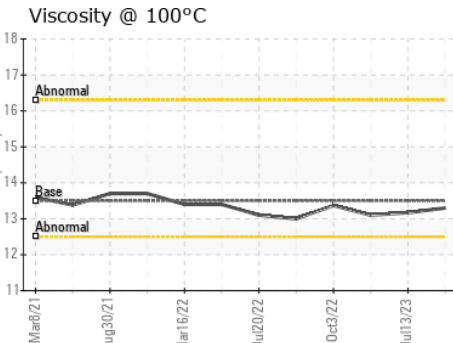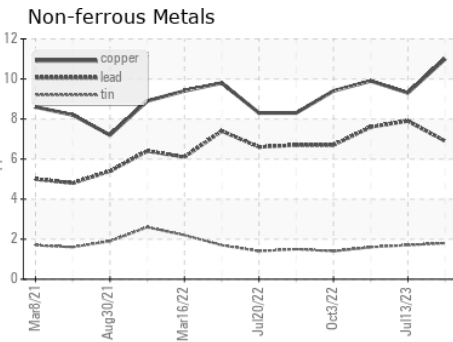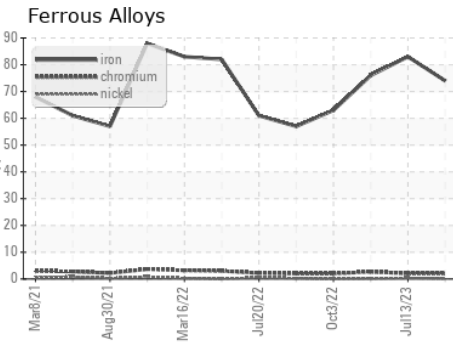

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0026939 **Received** : 25 Sep 2023  
**Lab Number** : 05959945 **Diagnosed** : 29 Sep 2023  
**Unique Number** : 10661158 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KV100, TBN )

**ENTERPRISE PRODUCTS - MORGAN'S POINT**  
 1200 N BROADWAY  
 LA PORTE, TX  
 US 77571  
 Contact: LONNIE RAMIREZ  
 LRamirez@eprod.com  
 T: (713)575-4112  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)