




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CATERPILLAR D6T 15104819 (S/N WCG00337)
 Component
Diesel Engine
 Fluid
ROYAL PURPLE MOTOR OIL 15W40 (--- GAL)

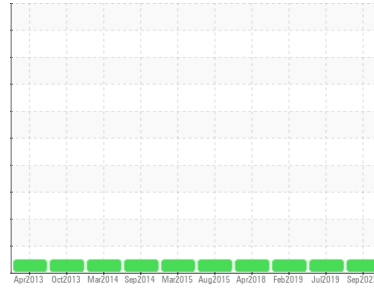

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			RP0033732	RP190477	RP180970
Sample Date	Client Info			14 Sep 2023	15 Jul 2019	18 Feb 2019
Machine Age	hrs	Client Info		23188	20931	70756
Oil Age	hrs	Client Info		353	0	0
Oil Changed	Client Info			Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	30	52	48
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	5	4
Lead	ppm	ASTM D5185m	>40	2	0	2
Copper	ppm	ASTM D5185m	>330	13	18	18
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Antimony	ppm	ASTM D5185m		---	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	24	1	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	100	110	101	103
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	60	126	12	10
Calcium	ppm	ASTM D5185m	3050	2415	3404	3288
Phosphorus	ppm	ASTM D5185m	1050	902	1058	1089
Zinc	ppm	ASTM D5185m	1200	1051	1294	1208

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	8	5
Sodium	ppm	ASTM D5185m		4	5	5
Potassium	ppm	ASTM D5185m	>20	0	7	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.9	0.9
Nitration	Abs/cm	*ASTM D7624	>20	9.1	10.7	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.0	33	33.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	19.7	20.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	8.22	7.70	7.41





OIL ANALYSIS REPORT

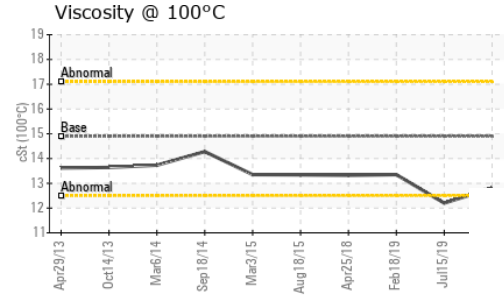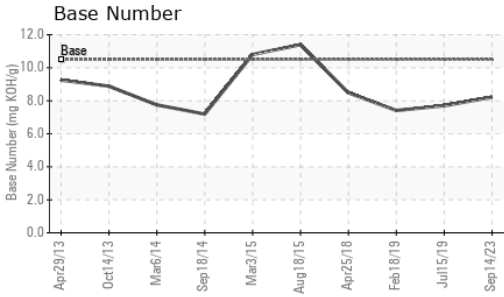

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	12.8	12.2	13.35

GRAPHS

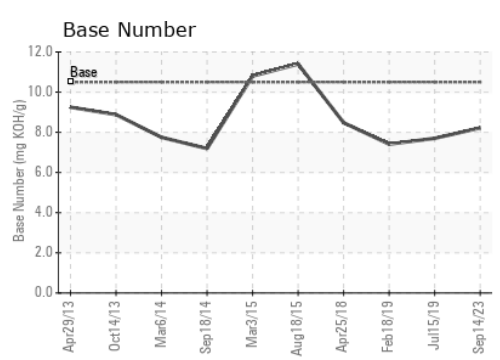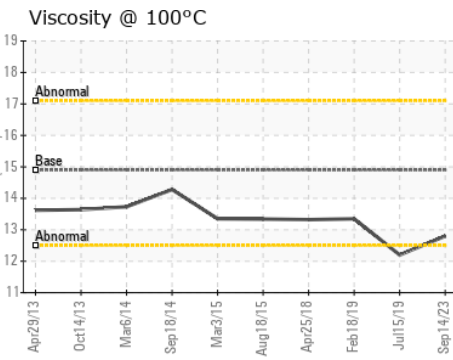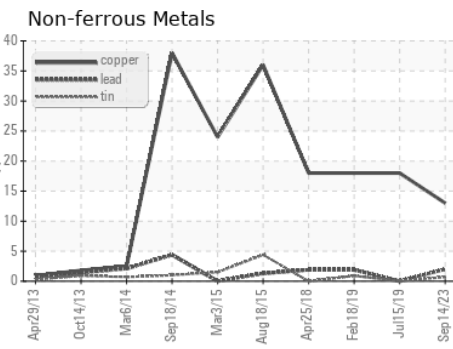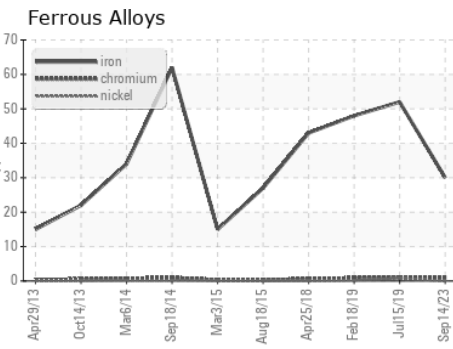

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0033732 **Received** : 25 Sep 2023
Lab Number : 05959964 **Diagnosed** : 26 Sep 2023
Unique Number : 10661177 **Diagnostician** : Sean Felton
Test Package : IND 2 (Additional Tests: FT-IR, KV100, TBN)

NRG TEXAS LLC
 3784 FM 39 SOUTH
 JEWETT, TX
 US 75846
 Contact: JURGEN THOMPSON
 JThompson@ecomaterial.com
 T: (903)626-9528
 F: (903)626-9772

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)