




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

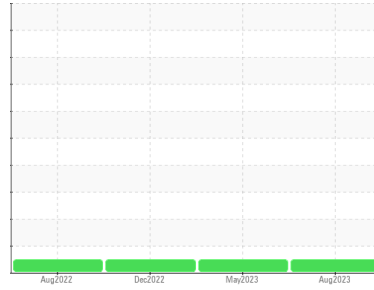

Area
Stoneway Concrete Renton
 Machine Id
[Stoneway Concrete Renton] 10-535
 Component
Diesel Engine
 Fluid
CASTROL Vecton LD 10W30 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PE0002286	PE0001301	PE0000338
Sample Date	Client Info			31 Aug 2023	11 May 2023	23 Dec 2022
Machine Age	hrs Client Info			2628	2036	1396
Oil Age	hrs Client Info			1232	640	1396
Oil Changed	Client Info			Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	26	16	46
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	4	7	18
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	5	4	19
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		32	93	27
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		5	6	22
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		84	87	675
Calcium	ppm	ASTM D5185m		2264	2232	1446
Phosphorus	ppm	ASTM D5185m		978	988	798
Zinc	ppm	ASTM D5185m		1259	1235	980
Sulfur	ppm	ASTM D5185m		4113	4202	3263

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	10
Sodium	ppm	ASTM D5185m		4	0	5
Potassium	ppm	ASTM D5185m	>20	21	18	46

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.1	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	22.4	24.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	18.2	20.5
Base Number (BN)	mg KOH/g	ASTM D2896		4.3	6.0	5.4





OIL ANALYSIS REPORT

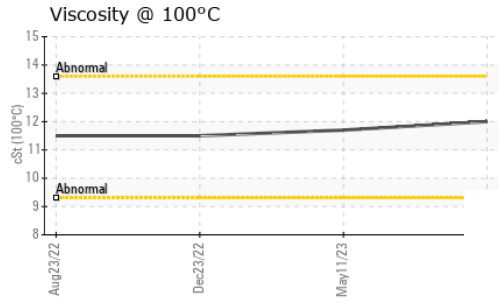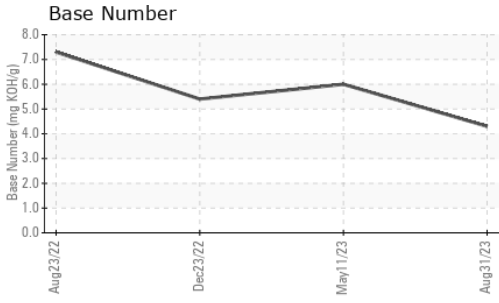

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.0	11.7	11.5

GRAPHS

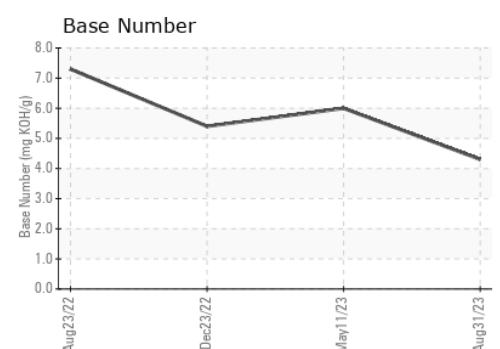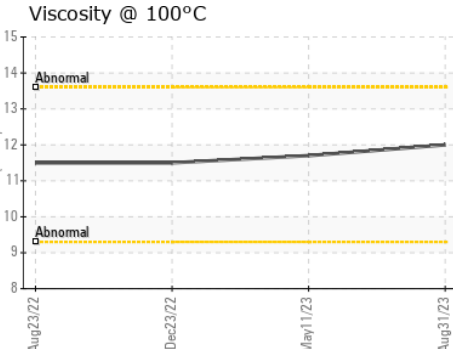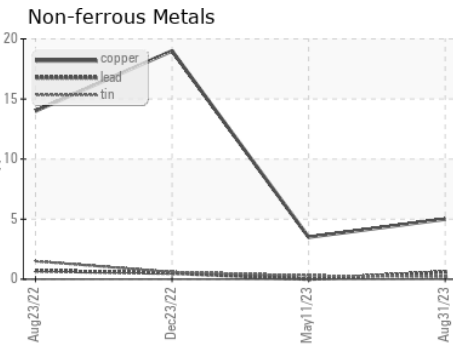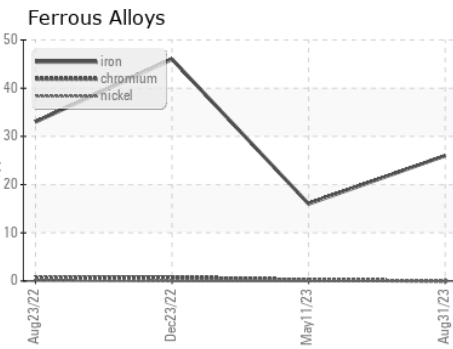

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0002286 **Received** : 25 Sep 2023
Lab Number : **05960487** **Diagnosed** : 27 Sep 2023
Unique Number : 10661700 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN)

Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Jesse Patterson
 oilsamples@gmccinc.com
 T: 1(866)292-1303
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)