




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

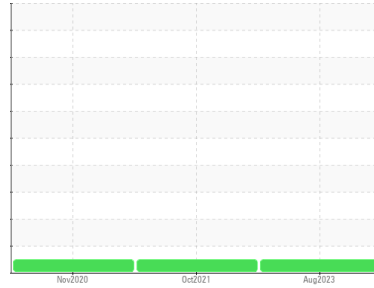

Area  
**[Z20028]**  
 Machine Id  
**RENAULT 75**

Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC05961584</b>	WC05371663	WC05117268
Sample Date	Client Info			<b>22 Aug 2023</b>	11 Oct 2021	15 Nov 2020
Machine Age	kms	Client Info		<b>227599</b>	0	169984
Oil Age	kms	Client Info		<b>0</b>	0	60000
Oil Changed	Client Info			<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>12</b>	6	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	6	0
Lead	ppm	ASTM D5185m	>40	<b>0</b>	2	1
Copper	ppm	ASTM D5185m	>330	<b>7</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	1
Antimony	ppm	ASTM D5185m		<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>4</b>	19	24
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>6</b>	83	80
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>563</b>	9	15
Calcium	ppm	ASTM D5185m	3000	<b>2398</b>	2038	2350
Phosphorus	ppm	ASTM D5185m	1150	<b>950</b>	850	1026
Zinc	ppm	ASTM D5185m	1350	<b>1190</b>	1021	1143
Sulfur	ppm	ASTM D5185m	4250	<b>3460</b>	2800	3146




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>9</b>	6	5
Sodium	ppm	ASTM D5185m	>158	<b>8</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	2
Fuel	%	ASTM D3524	>5	<b>1.9</b>	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	9.9	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.5</b>	22.6	22.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.8</b>	16.1	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.6</b>	4.6	5.2







# OIL ANALYSIS REPORT

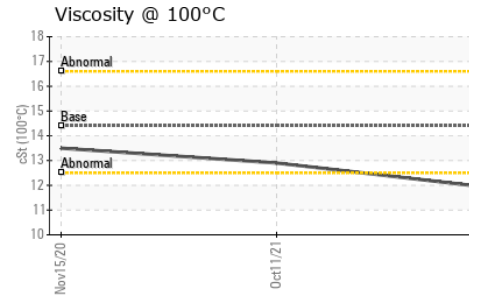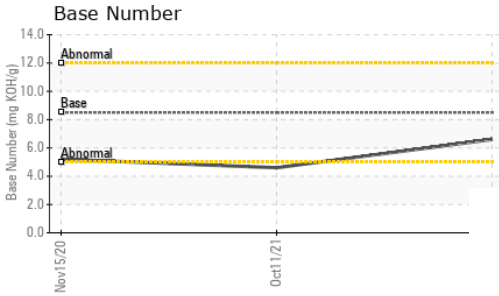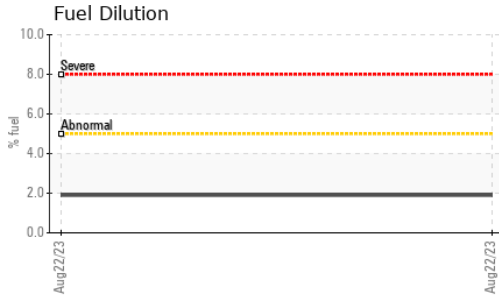

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>11.9</b>	12.9	13.5

## GRAPHS

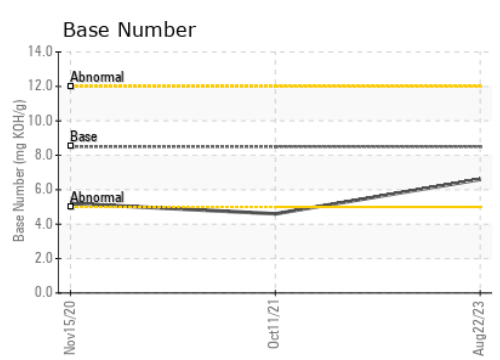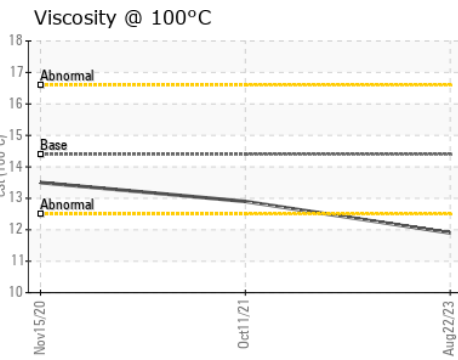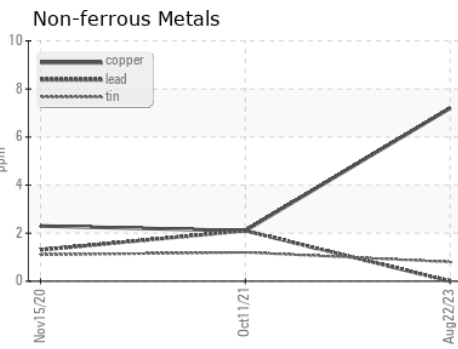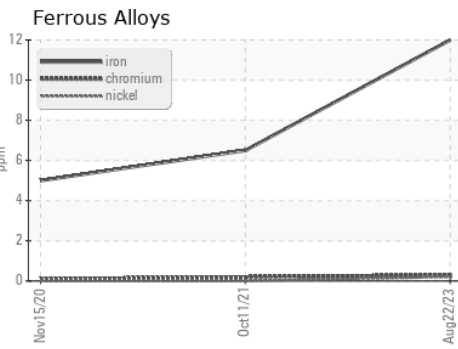

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC05961584 **Received** : 26 Sep 2023  
**Lab Number** : **05961584** **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10662797 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**BONNEYS**  
 AUCKLAND,  
 NZ  
 Contact: MIKE VESLY  
 mike.vesly@bonneys.co.nz  
 T:  
 F: