




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
COLD MILL/CM-5-STAND
 Machine Id
ROLL BEND 1710-042-0110
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 68 (150 GAL)

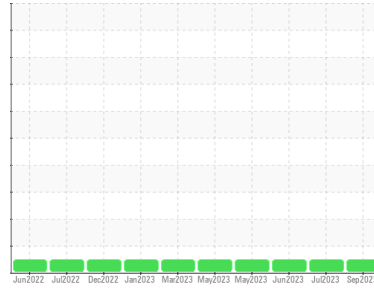

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KFS0003362	KFS0003792	KFS0002185
Sample Date	Client Info	11 Sep 2023	03 Jul 2023	28 Jun 2023
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	0	0	0
Chromium ppm ASTM D5185m	>20	0	0	0
Nickel ppm ASTM D5185m	>20	0	0	0
Titanium ppm ASTM D5185m		<1	0	0
Silver ppm ASTM D5185m		0	0	0
Aluminum ppm ASTM D5185m	>20	0	0	0
Lead ppm ASTM D5185m	>20	0	0	0
Copper ppm ASTM D5185m	>20	<1	0	<1
Tin ppm ASTM D5185m	>20	0	0	0
Vanadium ppm ASTM D5185m		0	<1	0
Cadmium ppm ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	0	0	0
Barium ppm ASTM D5185m	0	0	0	0
Molybdenum ppm ASTM D5185m	0	0	0	0
Manganese ppm ASTM D5185m	0	<1	0	0
Magnesium ppm ASTM D5185m	0	0	0	0
Calcium ppm ASTM D5185m	50	50	49	52
Phosphorus ppm ASTM D5185m	330	355	334	350
Zinc ppm ASTM D5185m	430	445	424	456
Sulfur ppm ASTM D5185m	760	853	982	1044

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	0	<1	0
Sodium ppm ASTM D5185m		0	0	<1
Potassium ppm ASTM D5185m	>20	0	0	0


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	606	246	492
Particles >6µm ASTM D7647	>1300	250	68	125
Particles >14µm ASTM D7647	>160	39	8	6
Particles >21µm ASTM D7647	>40	15	2	1
Particles >38µm ASTM D7647	>10	3	0	0
Particles >71µm ASTM D7647	>3	1	0	0
Oil Cleanliness ISO 4406 (c)	>19/17/14	16/15/12	15/13/10	16/14/10


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.60	0.39	0.39	0.39


Particle Trend

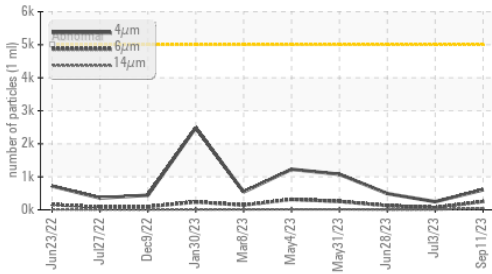


Acid Number

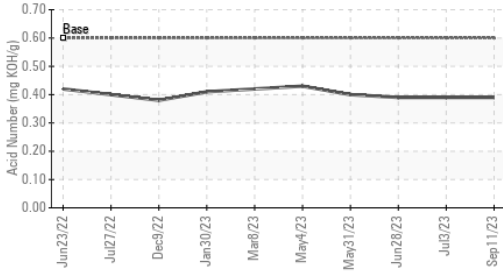

Viscosity @ 40°C

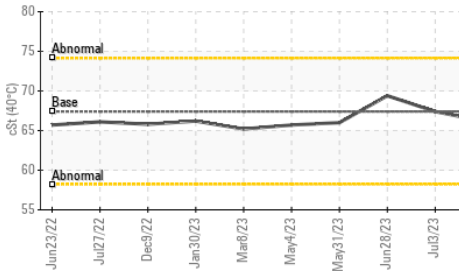

Particle Trend

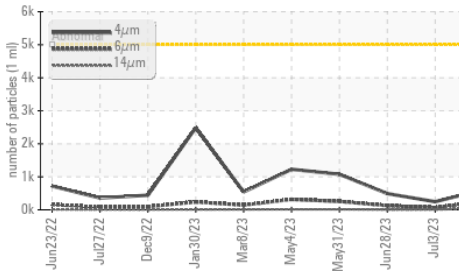


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67.4	66.2	67.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

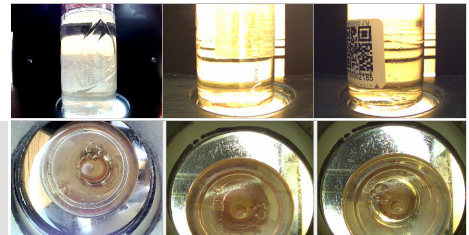


Bottom

GRAPHS


Ferrous Alloys

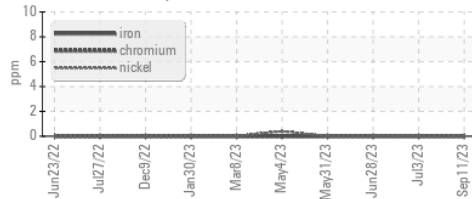


Non-ferrous Metals

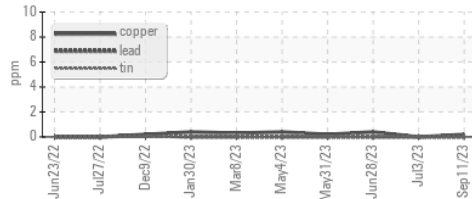


Viscosity @ 40°C

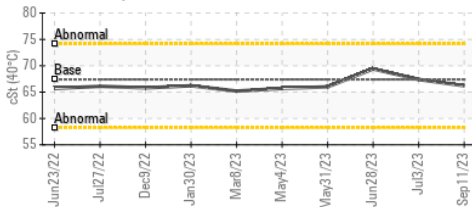

Particle Count

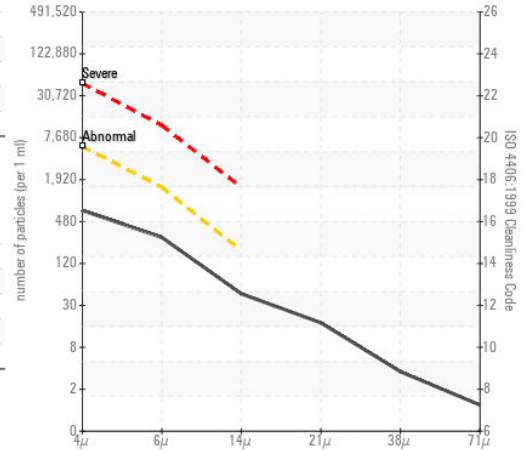

Acid Number

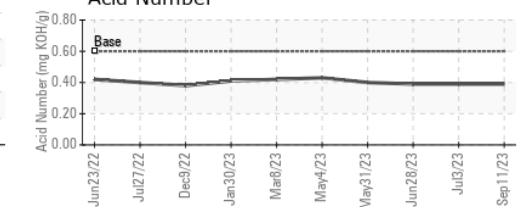

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KFS0003362 **Received** : 27 Sep 2023
Lab Number : 05962867 **Diagnosed** : 28 Sep 2023
Unique Number : 10669418 **Diagnostician** : Don Baldrige
Test Package : IND 2

CONSTELLIUM
 4805 SECOND STREET
 MUSCLE SHOALS, AL
 US 35661

Contact: Randy Nichols
 randall.nichols@constellium.com
 T: (256)386-6956

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: