

# PROBLEM SUMMARY

Sample Rating Trend

**WATER**



Machine Id  
**RAL-CFU112C**


Component  
**Gearbox**

Fluid  
**SUMMIT SYNGEAR PG 460 (--- QTS)**



## COMPONENT CONDITION SUMMARY

▲ Water (KF)

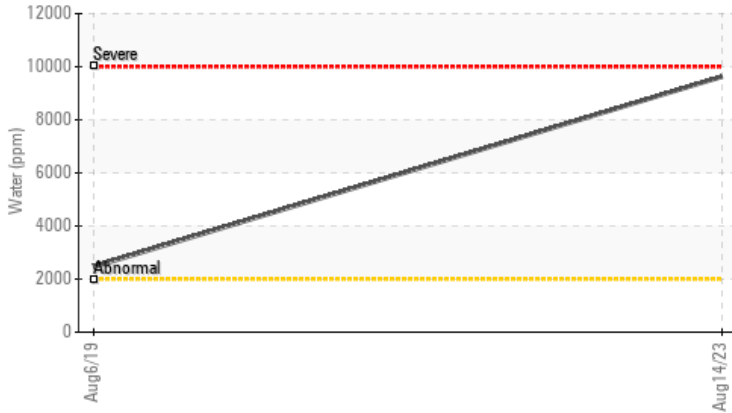

## RECOMMENDATION

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	---
Water	%	ASTM D6304	>0.2	▲ <b>0.963</b>	▲ 0.246	---
ppm Water	ppm	ASTM D6304	>2000	▲ <b>9628</b>	▲ 2460.4	---

**Customer Id:** HOLCOR  
**Sample No.:** RP0033591  
**Lab Number:** 05963649  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Water Access	---	---	?	We advise that you check for the source of water entry.

## HISTORICAL DIAGNOSIS

**06 Aug 2019 Diag: Jonathan Hester**

### WATER



No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

**WATER**



Machine Id  
**RAL-CFU112C**  
 Component  
**Gearbox**  
 Fluid  
**SUMMIT SYNGEAR PG 460 (--- QTS)**



## DIAGNOSIS

### Recommendation

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high concentration of water present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0033591</b>	RP202719	---
Sample Date	Client Info		<b>14 Aug 2023</b>	06 Aug 2019	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>3</b>	0	---
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>2</b>	<1	---
Tin	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>4</b>	<1	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	---
Calcium	ppm	ASTM D5185m		<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m		<b>578</b>	179	---
Zinc	ppm	ASTM D5185m		<b>0</b>	0	---




## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	0	---
Water	%	ASTM D6304	>0.2	<b>▲ 0.963</b>	▲ 0.246	---
ppm Water	ppm	ASTM D6304	>2000	<b>▲ 9628</b>	▲ 2460.4	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.80</b>	0.371	---


# OIL ANALYSIS REPORT

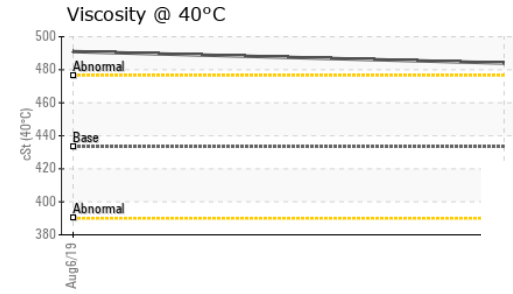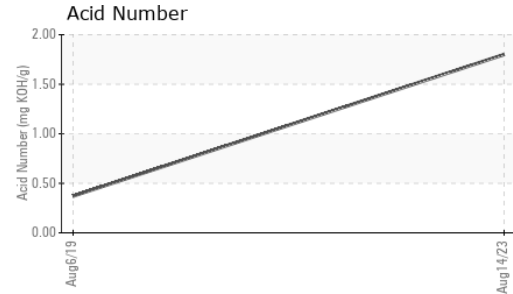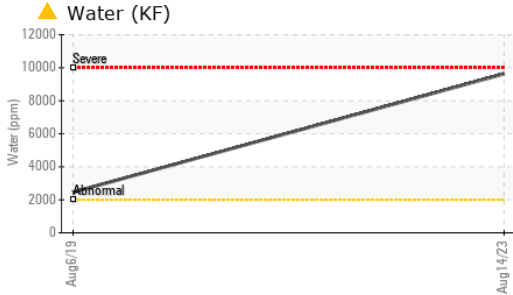





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	433.3	<b>484</b>	491	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

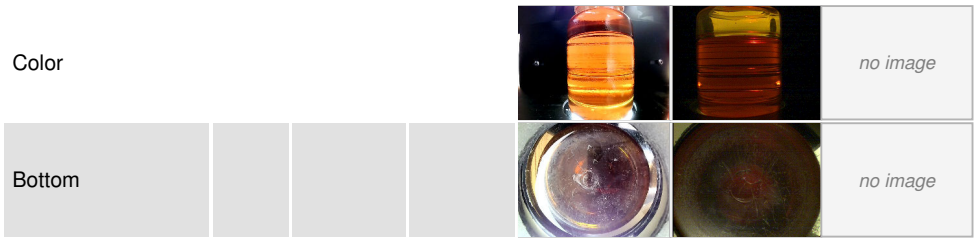

## GRAPHS

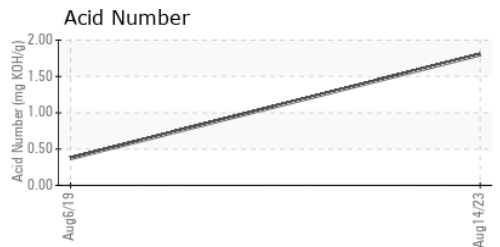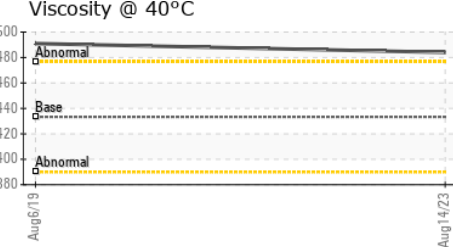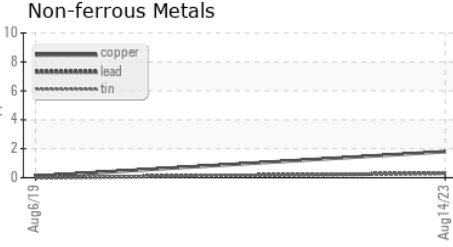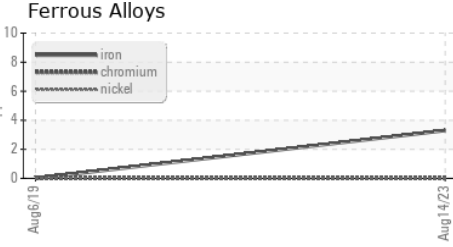

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0033591 **Received** : 28 Sep 2023  
**Lab Number** : 05963649 **Diagnosed** : 02 Oct 2023  
**Unique Number** : 10670200 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2

**HOLLINGSWORTH & VOSE CO**  
 1115 SE CRYSTAL LAKE DR  
 CORVALLIS, OR  
 US 97333  
 Contact: Jon Ayers  
 jonathan.ayers@hovo.com  
 T: (541)738-5399  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)