




OIL ANALYSIS REPORT

Sample Rating Trend

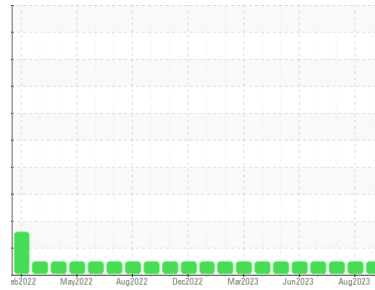

NORMAL



Area
OKLAHOMA
 Machine Id
7064

Component
Diesel Engine
 Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0857178	WC0820386	WC0754721
Sample Date	Client Info		06 Sep 2023	05 Aug 2023	01 Aug 2023
Machine Age	mls	Client Info	399869	3839	405000
Oil Age	mls	Client Info	0	3539	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	11	64	81
Chromium	ppm	ASTM D5185m >20	<1	3	3
Nickel	ppm	ASTM D5185m >4	0	11	2
Titanium	ppm	ASTM D5185m	4	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	5	10
Lead	ppm	ASTM D5185m >40	6	<1	14
Copper	ppm	ASTM D5185m >330	4	17	4
Tin	ppm	ASTM D5185m >15	2	3	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	44	2	33
Barium	ppm	ASTM D5185m 10	0	<1	<1
Molybdenum	ppm	ASTM D5185m 100	43	24	21
Manganese	ppm	ASTM D5185m	1	2	1
Magnesium	ppm	ASTM D5185m 450	525	784	194
Calcium	ppm	ASTM D5185m 3000	1755	1477	2210
Phosphorus	ppm	ASTM D5185m 1150	1102	1055	989
Zinc	ppm	ASTM D5185m 1350	1359	1330	1260
Sulfur	ppm	ASTM D5185m 4250	3342	2677	3390

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	9	11
Sodium	ppm	ASTM D5185m >158	6	22	3
Potassium	ppm	ASTM D5185m >20	5	8	7

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.4	1	1.3
Nitration	Abs/cm	*ASTM D7624 >20	10.4	12.9	13.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.0	28.8	28.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.8	28.2	23.7
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	9.3	4.8	6.2







OIL ANALYSIS REPORT

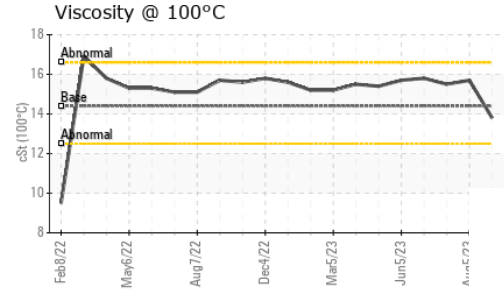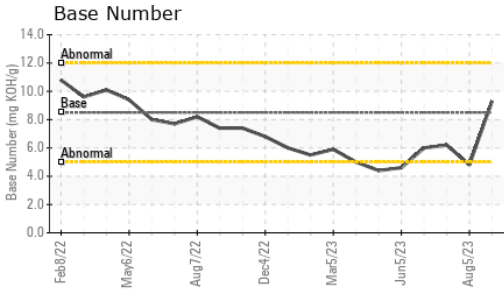

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	15.7	15.5

GRAPHS

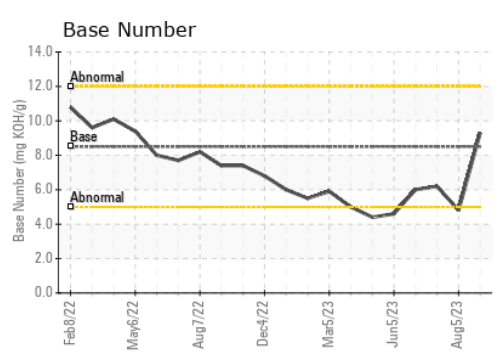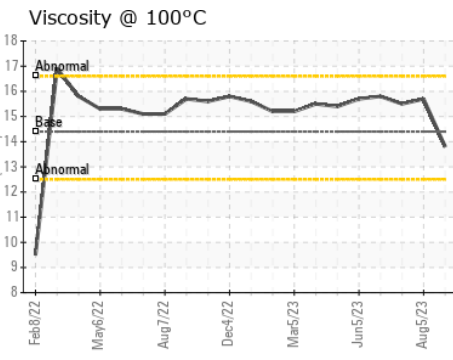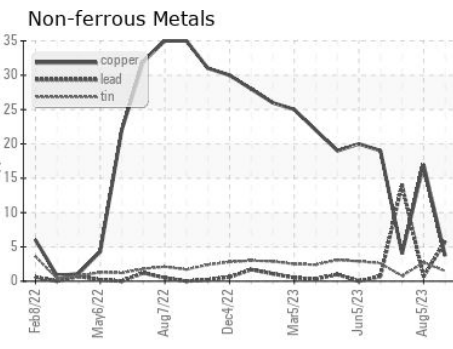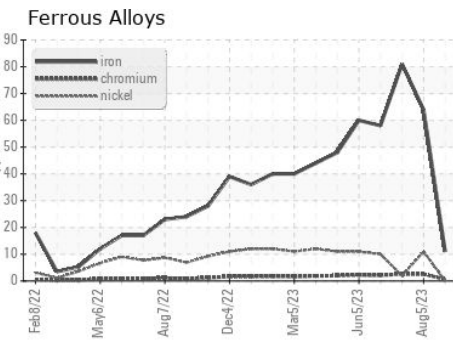

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0857178 **Received** : 28 Sep 2023
Lab Number : **05964066** **Diagnosed** : 29 Sep 2023
Unique Number : 10670617 **Diagnostician** : Wes Davis
Test Package : FLEET

LIBERTY DISPOSAL
 6401 S EASTERN AVE
 OKLAHOMA CITY, OK
 US 73149
 Contact: Loran Cottle
 l.cottle@ldi89.com
 T: (910)970-0291
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)