

# **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

## Area ACAS 115 [6897] Machine Id ATLAS COPCO API306149 Component

Compressor

### DIAGNOSIS

# Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM    | IATION   | method      | limit/base | current         | history1      | history2     |
|------------------|----------|-------------|------------|-----------------|---------------|--------------|
| Sample Number    |          | Client Info |            | UCH05967875     |               |              |
| Sample Date      |          | Client Info |            | 15 Sep 2023     |               |              |
| Machine Age      | hrs      | Client Info |            | 38992           |               |              |
| Oil Age          | hrs      | Client Info |            | 4130            |               |              |
| Oil Changed      |          | Client Info |            | Changed         |               |              |
| Sample Status    |          |             |            | NORMAL          |               |              |
| WEAR METALS      |          | method      | limit/base | current         | history1      | history2     |
| Iron             | ppm      | ASTM D5185m | >50        | 0               |               |              |
| Chromium         | ppm      | ASTM D5185m |            | 0               |               |              |
| Nickel           | ppm      | ASTM D5185m | 20         | 0               |               |              |
| Titanium         | ppm      | ASTM D5185m |            | 0               |               |              |
| Silver           | ppm      | ASTM D5185m |            | 0               |               |              |
| Aluminum         | ppm      | ASTM D5185m | >15        | 0               |               |              |
| Lead             | ppm      | ASTM D5185m | >65        | 0               |               |              |
| Copper           | ppm      | ASTM D5185m | >65        | 0               |               |              |
| Tin              | ppm      | ASTM D5185m | >10        | ۰<br><1         |               |              |
| Vanadium         | ppm      | ASTM D5185m | 210        | 0               |               |              |
| Cadmium          |          | ASTM D5185m |            | 0               |               |              |
|                  | ppm      |             |            | U               |               |              |
| ADDITIVES        |          | method      | limit/base | current         | history1      | history2     |
| Boron            | ppm      | ASTM D5185m |            | 0               |               |              |
| Barium           | ppm      | ASTM D5185m |            | 0               |               |              |
| Molybdenum       | ppm      | ASTM D5185m |            | 0               |               |              |
| Manganese        | ppm      | ASTM D5185m |            | <1              |               |              |
| Magnesium        | ppm      | ASTM D5185m |            | <1              |               |              |
| Calcium          | ppm      | ASTM D5185m |            | 2               |               |              |
| Phosphorus       | ppm      | ASTM D5185m |            | 302             |               |              |
| Zinc             | ppm      | ASTM D5185m |            | 8               |               |              |
| Sulfur           | ppm      | ASTM D5185m |            | 34              |               |              |
| CONTAMINANTS     |          | method      | limit/base | current         | history1      | history2     |
| Silicon          | ppm      | ASTM D5185m | >35        | 4               |               |              |
| Sodium           | ppm      | ASTM D5185m |            | 0               |               |              |
| Potassium        | ppm      | ASTM D5185m | >20        | 0               |               |              |
| FLUID DEGRADA    | TION     | method      | limit/base | current         | history1      | history2     |
| Acid Number (AN) | mg KOH/g | ASTM D8045  |            | 0.21            |               |              |
| VISUAL           |          | method      | limit/base | current         | history1      | history2     |
| White Metal      | scalar   | *Visual     | NONE       | NONE            |               |              |
| Yellow Metal     | scalar   | *Visual     | NONE       | NONE            |               |              |
| Precipitate      | scalar   | *Visual     | NONE       | NONE            |               |              |
| Silt             | scalar   | *Visual     | NONE       | NONE            |               |              |
| Debris           | scalar   | *Visual     | NONE       | NONE            |               |              |
| Sand/Dirt        | scalar   | *Visual     | NONE       | NONE            |               |              |
| Appearance       | scalar   | *Visual     | NORML      | NORML           |               |              |
| Odor             | scalar   | *Visual     | NORML      | NORML           |               |              |
| Emulsified Water | scalar   | *Visual     | >0.1       | NEG             |               |              |
| Free Water       | scalar   | *Visual     |            | NEG             |               |              |
| 16:34:41) Rev: 1 |          |             |            | Contact/Locatio | on: JIM SUARE | Z - UCADVTOM |



# **OIL ANALYSIS REPORT**

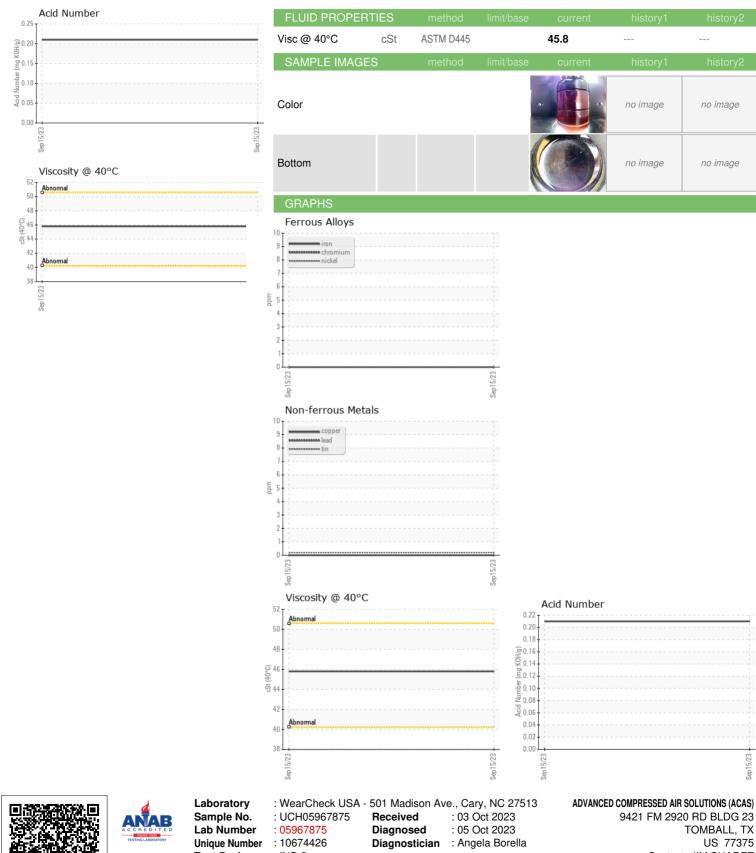

Test Package : IND 2 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. jim@advancedcompressedair.com \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: JIM SUAREZ - UCADVTOM

TOMBALL, TX

Contact: JIM SUAREZ

US 77375

Sepi

T:

F:

no image

no image