


PROBLEM SUMMARY

Sample Rating Trend



ISO

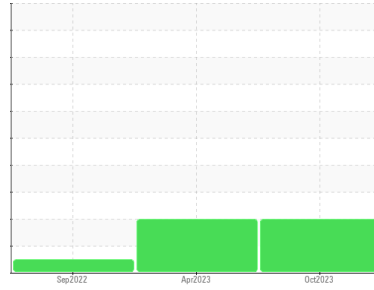


Machine Id
KAESER BSV 100 3558649 (S/N 1004)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

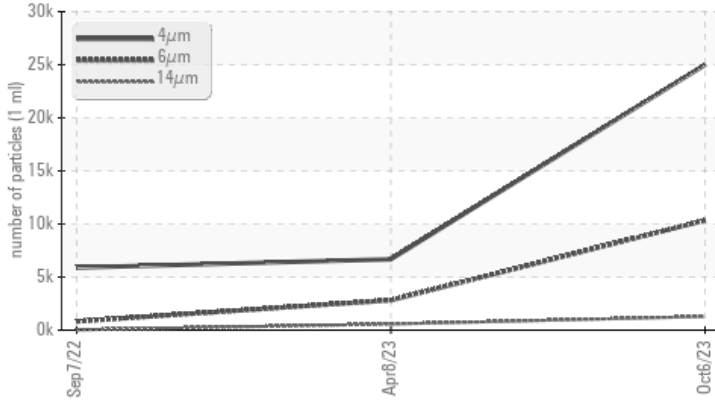

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ABNORMAL	ABNORMAL	NORMAL
Particles >6µm	>1300	▲ 10336	▲ 2816	818
Particles >14µm	>80	▲ 1284	▲ 573	27
Particles >21µm	>20	▲ 415	▲ 228	5
Particles >38µm	>4	▲ 26	▲ 14	1
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 22/21/17	▲ 20/19/16	20/17/12

Customer Id: GREMON
Sample No.: KCPA000770
Lab Number: 05978947
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

08 Apr 2023 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



07 Sep 2022 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

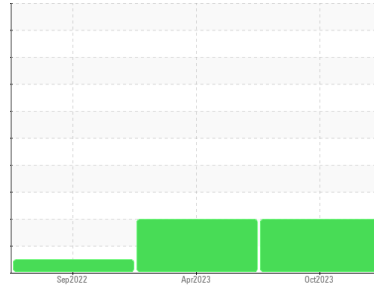

ISO



Machine Id
KAESER BSV 100 3558649 (S/N 1004)

Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA000770	KCP52866	KCP50194
Sample Date	Client Info			06 Oct 2023	08 Apr 2023	07 Sep 2022
Machine Age	hrs	Client Info		75110	71885	70214
Oil Age	hrs	Client Info		0	3000	3000
Oil Changed		Client Info		N/A	Changed	Not Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	2	1	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	107	101	92
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	103	114	89
Calcium	ppm	ASTM D5185m	2	5	4	3
Phosphorus	ppm	ASTM D5185m		<1	2	3
Zinc	ppm	ASTM D5185m		0	0	1
Sulfur	ppm	ASTM D5185m		15259	14398	16748

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		16	17	10
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.05	0.025	0.013	0.020
ppm Water	ppm	ASTM D6304	>500	253.9	137.7	204.1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		24993	6678	5895
Particles >6µm		ASTM D7647	>1300	▲ 10336	▲ 2816	818
Particles >14µm		ASTM D7647	>80	▲ 1284	▲ 573	27
Particles >21µm		ASTM D7647	>20	▲ 415	▲ 228	5
Particles >38µm		ASTM D7647	>4	▲ 26	▲ 14	1
Particles >71µm		ASTM D7647	>3	2	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 22/21/17	▲ 20/19/16	20/17/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.47	0.44	0.35

OIL ANALYSIS REPORT

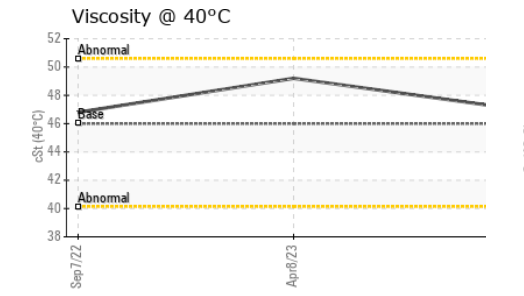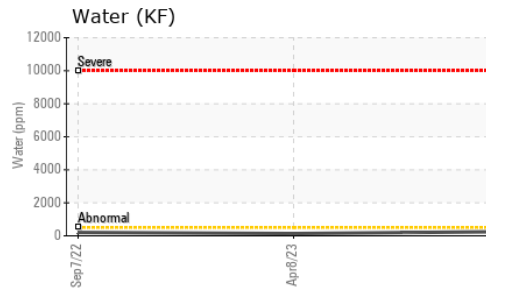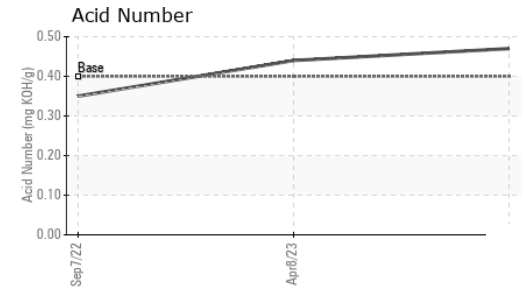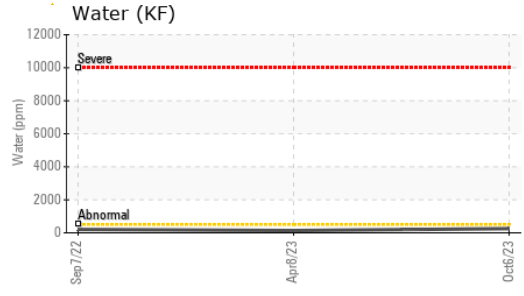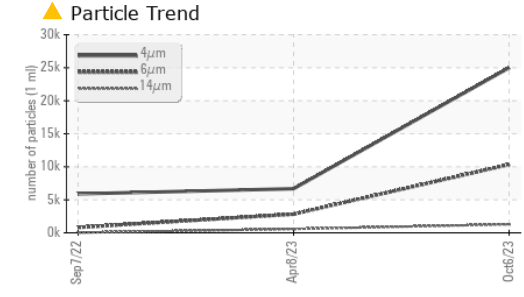






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	47.1	49.2	46.8

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS

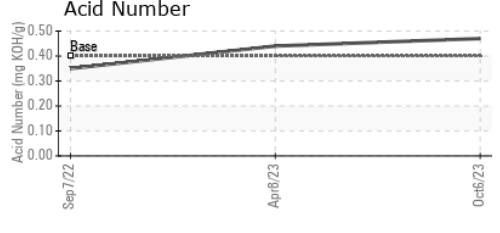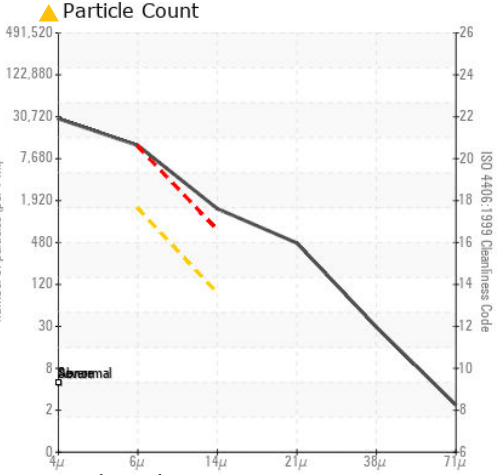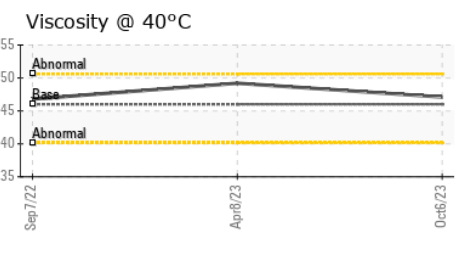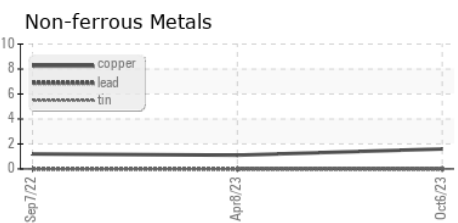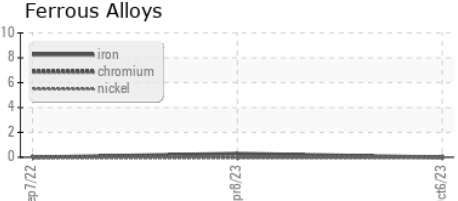

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA000770 **Received** : 13 Oct 2023
Lab Number : 05978947 **Diagnosed** : 17 Oct 2023
Unique Number : 10696242 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

GREINER BIO-ONE
 4238 CAPITOL DR.
 MONROE, NC
 US 28112
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: